JPL D-7669, Part 2

## Planetary Data System Standards Reference

April 10, 2012 Version 4.0.4 (beta)

Jet Propulsion Laboratory California Institute of Technology Pasadena, California PDS4 build 2c, based on:

Information Model Specification Version 0.7.0.0.j generated Wed Apr 04 16:06:00 PDT 2012

schema files built from the PDS4 ontology model PDS4\_0.7.0.0.j generated Wed Apr 04 16:05:59 PDT 2012

## Contents

Cł	Change Log ix					
Re	espons	ses to Build 1B Assessment x	aiii			
Re	spons	ses to Build 1C Assessment xx	XV			
1	1.1 1.2 1.3 1.4	Deduction         Purpose         Scope         Audience         Document Organization	1 1 2 2 2			
	1.5 1.6	External Standards	2 3			
Ι	Arc	chive Structure Standards	5			
2	Arch	nive Organization and Directory Contents	7			
	2.1 2.2 2.3	Root Directory       Subdirectories       Browse Directory	8 9 13			
	2.4 2.5 2.6	Context Directory	13 17 18			
	2.7 2.8	Document Directory	18 20			
		SPICE Kernel Directory	20 21 22			
3	<b>Labe</b> 3.1		<b>25</b> 28			

	3.2	The Identification Area	8
	3.3	The Observation Area	9
		3.3.1 The Mission Area	9
		3.3.2 The Node Area	1
	3.4	The Reference List	1
	3.5	The File Area	1
		3.5.1 The Digital Object Classes	2
	3.6	The Closing Tag	2
	3.7	Local Data Dictionaries	2
4	Fund	lamental Data Structures 3	2
4	<b>4</b> .1	Tables   3	-
	4.1	Arrays	
	4.3	Parsable Byte Stream	
	4.4	Encoded Byte Stream	
	4.4		0
5	Data	Storage Types 3	7
	5.1	Character Data Types	7
		5.1.1 Boolean Types	
		5.1.2 Date and Time Types	
		5.1.3 Numeric Types	
		5.1.4 String Types	
	5.2	Binary Data Types	
		5.2.1 Integers	
		5.2.2 Reals	
		5.2.3 Complex	
		5.2.4 Boolean	-
	5.3	Multi-Valued Data Types	-
		5.3.1 Vectors	
		5.3.2 Quaternions	0
6	Nom	enclature Rules 5	3
Ū	6.1	Identifiers	
		6.1.1 Logical Identifiers vs. Versioned Identifiers	
		•	4
		6.1.3 Collection Identifiers	4
		6.1.4 Bundle Identifiers	5
	6.2		6
		6.2.1 Version IDs	
		6.2.2 Local Identifiers	-
		6.2.3 Digital Object Identifiers	
		6.2.4 Uniform Resource Identifiers	
		6.2.5 Names	8

iv

	6.3 6.4 6.5 6.6 6.7	6.2.6       Titles and Alternate Titles	58 59 61 61 62
II	Da	ta Content Standards	63
7	Calil	oration Standards	65
8	Cart	ographic Standards	67
	8.1	Introduction	67
		8.1.1 International and NASA Advisory Groups for Cartographic Standards	67
	8.2	Inertial Reference Frame and Time System	68
	8.3	Spin Axes and Prime Meridians	70
	8.4	Body-Fixed Planetary Coordinate Systems	71
		8.4.1 Planets and Satellites	72
		8.4.2 Small Bodies	73 73
		<ul> <li>8.4.3 Rings</li></ul>	73
	8.5	Surface Models	73 74
	8.6	PDS Keywords for Cartographic Coordinates	74
	8.7	Map Resolution	77
9	Cont	ext Information	79
	9.1	Investigations	79
	9.2	Nodes	80
	9.3	Observing Systems	80
		9.3.1 Instrument Hosts	80
	<b>.</b>	9.3.2 Instruments	80
	9.4	Personnel	80
	9.5	Publications / References	81
	9.6	Resources	81
	9.7	Software	81
	9.8	Targets	81
10	Docu	imentation	83
	10.1	Data Set Description	84
		Instrument Description	85
		Instrument Host Description	85
		Investigation / Mission Description	85

95 . 96

99

101 . 102 . 104 . 106 . 109 . 111 . 114 . 116 . 119 . 121 . 123 . 125 . 127 . 128 . 130 . 132 . 134 . 135

11	Time	Standards
	11.1	Date/Times
		Dates
		11.2.1 Conventional Dates
		11.2.2 Native Dates
	11.3	Times
		11.3.1 Conventional Times
		11.3.2 Native Times
	11.4	Midnight and Leap Seconds
		11.4.1 Midnight
		11.4.2 Leap Seconds
12		of Measurement
	12.1	SI Units
Δr	pendi	ras
лþ	penui	
Α	Digita	al Object Classes
	A.1	Array_2D_Image
	A.2	Array_2D_Spectrum
	A.3	Array_2D_Map
	A.4	Array_3D_Image
	A.5	Array_3D_Spectrum
	A.6	Array_3D_Movie
	A.7	Table_Character
		Table_Character_Grouped
		Inventory_LIDVID_Primary
		Inventory_LIDVID_Secondary
		Inventory_LID_Secondary
		Delivery_Manifest
		Table_Binary
		Table_Binary_Grouped
		Stream_Delimited
		XML_Schema
	A.17	Service_Description

vi

#### Acronyms

CONTENTS	vii
Bibliography	149

CONTENTS

viii

# **Change Log**

Version	Section (old/new)	Change
4.0.1	Appendix A	Added examples for Image_Grayscale
4.0.2.	Appendix A	Temporarily dropped appendices
		(other changes not fully documented)
4.0.3	throughout	Changed references to external documentation to clickable links.
		Updated format of citations and made them clickable to bibliography
		Introduced global acronym handling and made acronyms clickable to definitions listed in appendices
		Made hidden hyperlinks explicit and therefore accessible in printed versions of the document, except where links were non-essential and provided solely for convenience of online readers
		Fixed text wrapping on long URLs that ran off page edge
	1.1/*	PDS Data Policy section removed.
	1.2/1.1	List of documents dropped; text updated to refer to complete list in bibliography.
	1.4/1.3	Deleted "standards" from third line.
	1.5/1.4	Completely re-written.
	1.6/*	All references in section 1.6 were transferred to the bibliography and the section was deleted.
	2 & 3	Switched the orders of chapters 2 and 3.
	2/3	Made numerous changes to opening paragraphs of chapter.

2.1/3.1	Significant changes throughout section, including dropping "er- rata.txt", changing name of "aareadme.xml" and changing cardinal- ity values of files and subdirectories in root directory.
2.2/3.2	Changed "standard product label values" to "product label values"
2.5/3.5	Changed "standard data products" to "regular data products"
2.6/3.6	Changed "standard data products" to "basic data products"
2.7/3.7	Added required files table and completed text.
3.4/2.4	Changed "collections and standard products" to "collections, which in turn identify all of the basic products".
4 Changed "classes, elements, and standard values for the el to "classes, attributes, and standard values".	
	Changed "classes, elements, and standard values" to "classes, at- tributes, and standard values."
	Significantly re-wrote introductory section.
	Updated label structure figure.
*/4.1	Added new section The XML Declaration and Schema Reference
4.1/4.2	Added text, label snippet, and table of attributes.
4.3/4.4	Added text and label snippet.
4.3.1/4.4.1	Added text and label snippet.
4.3.2/4.4.2	Added text and label snippet.
4.5.1.1/4.6.1.1	Deleted section The Data_Location Class.
*/4.6	Added new section The Closing Tag.
*/4.7	Added placeholder section Local Data Dictionaries.
5	Added "base classes" to end of last sentence.
5.4	Changed two instances of "encoded stream base" to "encoded byte stream".
6.1	Changed title from Attribute Data Types to Character Data Types.
	Modified text to include character tables.
	Re-organized data_types into subsections.
	Deleted ASCII_Date_Time_UTC.
	Changed ASCII_Integer_Base* to ASCII_Numeric_Base*.
	Added ASCII_Mask.

	2147483647 to 4294967295.		
6.2/*	Deleted section Character Data Types.		
6.3/6.2	Added text.		
6.3.1.1/6.2.1.1	Changed "Least Significant Bit (LSB)" to "Least Significant Byte (LSB) first (also known as <i>little-endian</i> )"		
	Dropped the SignedByte data type.		
6.3.1.2/6.2.1.2	Changed "Least Significant Byte first (LSB) format" to "LSB format"		
6.3.1.3/6.2.1.3	Changed "Most Significant Byte first (MSB)" to "Most Significant Byte (MSB) first (also known as <i>big-endian</i> )"		
	Dropped the SignedByte data type.		
6.3.1.4/6.2.1.4	Changed "Most Significant first (MSB) format" to "MSB format"		
6.3.3/6.2.3	Added figures for complex types.		
*/6.2.4	Added subsection heading for Boolean binary type.		
7.4 Sixth bullet under <b>Rules</b> , changed "alphabetical" to "alphanume			
8/*	Astronomical Nomenclature chapter removed.		
10.1/9.1	Last sentence: changed "late 2008" to "early 2011"		
10.1.1/9.1.1	Second paragraph: updated WGCCRE list to include 2011 report		
10.2/9.2	Second line: changed "bodys" to "body's"		
	Second paragraph: fixed broken Greek symbols		
	Third paragraph, last sentence: changed "See the Planetary Science Data Dictionary (PDS, 2008), chapter 2" to "See chapter 12 of this document"		
	Fourth paragraph, first sentence: fixed incorrect citation; changed "(IAU, 2000)" to "(IAU, 2002)"		
	Fourth paragraph: changed "Earths" to "Earth's"		
10.3/9.3	First paragraph: changed "Suns" to "Sun's" (twice)		
10.4.1/9.4.1	Throughout: fixed missing degree symbols		
	First paragraph: changed "bodys" to "body's"		
	Second paragraph: added "the" before "Sun"		
	Second paragraph: fixed Greek symbol		

	Third paragraph: changed "existing PDS data sets" to "existing sets of data archived with the PDS"			
10.7/9.7	9.7 First paragraph: fixed superscripted text			
13/12	Added note about SPICE time systems after final paragraph.			
13.3.1/12.3.1	Changed case of attributes from upper to lower.			
	Changed "elements" to "attributes".			
	Removed "and catalog files".			
13.3.2/12.3.2	Changed "elements" to "attributes".			
13.3.2.1/12.3.2.1	Changed case of attributes from upper to lower.			
	Changed "elements" to "attributes".			
13.3.2.4.1/12.3.2.4.1	Replaced all instances of "areocentric" with "planetocentric'.			
	Replaced all instances of "ARA" with "RA"			
	Changed case of attributes from upper to lower.			
	Changed "element" to "attribute".			
	Changed "Zaxis" to "Z-axis"			
	Added line breaks and indenting in LTST equations.			
13.3.2.4.2/12.3.2.4.2	Replaced "areocentric" with "planetocentric"			
appendices	Fixed chapter and section numbering in appendices			
Appendix A	Re-attached Appendix A, "Digital Object Classes"			
	Completely re-wrote introductory section.			
	Fixed automation code to include only terminal user classes			
	Fixed automation code to include inherited attributes and associations			
	In "Attributes & Associations" sections, changed redundant "Req?" column to "Values" column			
	Dropped schema samples			
	Improved automated generation of XML examples			
Acronyms	Added list of acronyms			
Bibliography	Added bibliography			

# **Responses to Build 1B Assessment**

Reviewer	Section	Comment	Response
Acton	1.2	SPICE Archive Preparation Guide insert "and other SPICE archive producers" after (NAIF) and drop "that NAIF follows"	I've dropped the list of documents from this section so this point is moot.
	1.6	Drop Davies, 1991 reference. Replace with Seidelmann, et al., 2007.	
	1.7	Questions inclusion of CCSDS PVL Specifica- tion	
	2.1	Add "Sub-directories are indicated by use of bold font." to end of first paragraph.	
		Try to avoid splitting directory / file contents tables across page boundaries.	
	2.2	How does errata file mentioned here relate to the "errata.xml" file mentioned earlier?	
	2.8	Add, "The geometry directory contains any ob- servation geometry data other than 'SPICE'- type data files."	
		(In response to question about relationship be- tween cartographic info and geometry direc- tory) add "cartographic information can be found (generally is found) within some SPICE files, but could also be found–explicitly or implicitly–in other 'geometry files.' "	
	2.9	After final paragraph, add "Note that it is com- mon practice for a flight project to produce and archive a SPICE bundle, usually containing all SPICE data used on a project. As a conse- quence, for science data archive bundles this directory is often not used."	

	3.1	First paragraph, switch order to "digital, physical or conceptual"	
	3.3	What is this? The title of this section says it will discuss something called "collection project."	
4	4	First paragraph, last line, change "element" to "elements".	
2	4	Second paragraph, "one label file for every product" – is this true for software? Is a collection of software treated as a single product, or a set of products?	
4	4.4	"the system files" - what is meant by this?	
	5	Add "base classes." to the end of the last sentence.	Done.
	5.2	Array base figure has overwritten some text.	
	5.3	First paragraph doesn't make sense.	
	5.4	Two instances of "encoded stream base" need to be updated to "encoded byte stream".	Fixed.
		Might be useful to provide one or two examples here?	
•	6.4	In response to question about place of sec- tion on multi-valued data types, "Acton doesn't think description of quaternions really belongs in a cartography section."	
	6.4.2	Final paragraph, 'Rotations Required Reading' and 'SPICE Quaternion White Paper' – should there be more formal references for these doc- ument?	
,	7.1	Taken as a whole section 7.1.1 is very unclear! Needs to be totally rewritten.	
,	7.1.1	The use of "vs." (in the title) helps make the following discussion confusing.	
		Third paragraph, what are "HIGH LEVEL VERSION IDs"	
		Fourth paragraph, e.g.	Not sure

Not sure what's being suggested here.

### CONTENTS

7.1.2	What is meant by the term "product identi- fiers"; should this be "product logical identi- fiers"?	
	Fourth paragraph, change "name for specific" to "name as the specific".	
	Second rule, insert "Allowed" before "charac- ter"	
7.1.3	Description of specific identifier: What is this stuff?	Backus-Naur Form (BNF) notation. (This was also used in PDS3 StdRef.)
7.2	Is this the "VID" mentioned earlier? Or some- thing else? (Make this clear.) (The use of "Other" makes it sound as if it is unrelated to VID.)	
7.2.1	Are version IDs required or optional? Suggest changing "are" to "can be".	
7.2.2	Local_identifiers are also used in section 4.4	
	The second paragraph mentions a recommen- dation to follow; where is it?	
7.2.6	Insert "by" after "constrained only"	
	Fifth paragraph, remove "characters" after "ASCII".	
7.3	Information here is inconsistent with section 2.1.	
7.4	Under <b>Recommendations</b> , question about "must have at least one period followed by an extension"	
7.5	For what purpose is the reference at the bottom of section 7.4 provided? Why should a user look here?	
8	I suggest elimination of this chapter. Or replace it with a simple pointer to the IAU website.	Chapter has been deleted.
10	Seems a little odd that there is no mention of "SPICE" within this chapter.	Currently working with C. Acton to address this.
10.2	Third paragraph, at the end of the fourth sen- tence, put ", with the exception of SPICE prod- ucts, for which TDB is used."	

10.3	Sixth line, "Suns" missing an apostrophe.	Fixed.
10.4.1	Fourth paragraph, replace everything from JPL DE403 on to "current JPL developmental ephemeris (e.g. DExxx).	
11.3.1	Where does a lander fit in? Consider adding this.	
12	Add a fourth point under "PDS criteria for in- clusion of a document": "4. Is the material free of ITAR restrictions, or can it be modified to be so?"	
	Second paragraph on page 82, contradicted by <i>PDS4 Concepts Document</i> which says, "PDS has adopted the PDF/A standard as the archival format for complex documents. UTF-8 encoded text files may be used for simple documents that do not require graphics or special formatting control."	
13	Note that the "SPICE" system, generally used by planetary missions for computing observa- tion geometry, uses additional time systems and time representations.	Added.
13.3.2.4.1	Replace instances of "areocentric" with "plan- etocentric", and "ARA" with "RA (right ascen- sion)"	Done.
	Middle of p. 87, insert "and" after "in deg".	Inserted missing line breaks after "hours" and "deg" and indented equations, which fixes problem.
13.3.2.4.2	Replace "areocentric" with "planetocentric".	Done.

Bell

Once more, formatting / spelling / etc. incon-Most of the worst of these "here" links general sistencies. Many fragmentary sentences, parawere deleted with the removal of the graphs, sections. One problem that this docuchapter on Astronomical Nomenclature. ment has over others is that it often refers to In the remaining cases, I have provided URLs with a hyperlink around a word (as in the external link explicitly where it was "for examples see here", where "here" is hyperimportant. In places where it remains linked). If one reads the document by printing hidden, it is provided solely as a conit (yes, I still like to edit / comment longhand), venience to the online reader, and is you have no idea to what the link is pointing (if not critical to understanding the mateyou can even tell it's a link). If references are to rial presented. off-line documents (e.g., last line of last paragraph of Sec. 6.4.2?), then these should have real citations, even a bibliographic list of such references. 1 In the second paragraph to chapter 1, it seems Actually, the sentence is correct, as written. In response to the Manageto me that the second sentence is backwards. It states "All version 4 data can be described ment Council's directive to reduce the complexity of the data storage formats using version 3 labels, but the converse is not true." Shouldn't the reverse hold, that all V3 used in PDS4, the DDWG determined data can be described with V4 labels, but not that no data interleaving between digiall V4 data can be described with V3 labels? tal objects would be permitted. Thus, Isn't that part of the goal of PDS4? any PDS3 data products that included interleaved data are not compliant with PDS4 and cannot be described using PDS4 classes. 1.1 PDS Data Policy. I don't know what "safed" Section deleted. data are. I couldn't find the term defined elsewhere, but it was referred to elsewhere as a status type. 2.10 I don't understand the point of the XML schema directory. If all schema are registered and in a central location, why does one need a directory for them as well? My understanding was that all versions of the schema should be available via the registry as well, so even that would make this unnecessary. Text says "Least Significant Byte", should be No, "Byte" is correct in this case. 6.3.1.2 "Bit" 6.3.1.3 Text says "Most Significant Byte", should be Ditto. "Bit" 6.3.1.4 Text says "Most Significant", should have "Bit" Changed to an acronym.

added.

7.1	In general, once again, some lists of items (e.g.,
	mission abbreviations) seem exemplary, others
	(collection types?) seem exhaustive with no in-
	dication either way, leaving it subject to inter-
	pretation.

- 7.1.4 Bundle Identifiers. States that LIDs are all uppercase in labels, but that this is not enforced if used on the file system(s). If true, this seems a general statement (LIDs in general) and not specific to Bundle LIDs.
- 7.4 States "remember all SPICE file extensions need to be reserved". Should either list them here or refer back to earlier list (at least by section number). Also states that "Need to include version information in filenames". In what sense? This can't be in the form "::version" as used elsewhere as colons aren't allowed in the file names (by stated convention).
- 10.2 Third paragraph, last line states "See the Planetary Science Data Dictionary (PDS, 2008), chapter 2....". Shouldn't this refer to Chapter 13 of this document? Or it this something else entirely?
- 12 Second paragraph on page 82 states "A flat, human-readable ASCII text version of each document must be included on the volume....". This seems at odds with the stated desire (DPH?) to have all documents in PDS/A format with other versions optional.
- all docs As an aside, there are clearly a lot of holes left in some of the documents. While that doesn't need pointing out, it did make it difficult in some cases [to] review content.
- Chanover general I found this document to be EXCELLENT even if preliminary. It was not until I looked at this document that I finally had an idea of what a PDS4 dataset should actually LOOK like. It does achieve its purposes as outlined by the bulleted items above.
- Gordon 3.2 "...standard product can only belong to one primary collection". Is this how we want to say it? I have an expansion for this comment which I'll introduce directly with the DDWG.

#### xviii

	general	There are still a lot of TBDs in the SR – primar- ily because the issues have not been addressed in the Information Model.	
Isbell	1.2	APG"Is this being replaced by the DPH?" Answer?	The document list in this section has been replaced by a text reference to the bibliography.
		<i>PDS Policies and Processes</i> . Document name and existence?	Ditto.
		Proposers Archive Guide. In progress?	Ditto.
		SPICE Archive Preparation Guide. In progress?	Ditto.
	1.7	As asked within document"ASCII and UTF-8 standards?"	
	2.10	Final line in section is incomplete"There is one required subdirectory to the XML schema directory. It contains".	
	5.1	"Table Base" - (ASCII characters xxx and yyy, respectively)." replace with"(ASCII charac- ter codes 13 and 10, respectively)."	
		Although this section shows an example of fastest-varying order for sample, line, band, I assume other orders are allowed? True? We should probably show example of other order (e.g. band, sample, line) $b_1s_1l_1, b_2s_1l_1, b_3s_1l_1b_1s_2l_1, b_2s_2l_1, b_3s_2l_1$ $b_1s_3l_1, b_2s_3l_1, b_3s_3l_1$	
		Graphical note: The 3-dimensional conceptual image covers (is in front of) part of the "Array_Base" image.	
	5.2	"Array Base" - Needs expanded information along with directive for adequate documenta- tion by data provider.	
	5.3	"Parseable Byte Stream" - Needs expanded in- formation along with directive for adequate documentation by data provider.	

6.3	"Binary Data Types" - Perhaps some added clarity is worthwhile throughout 6.3 regarding <i>byte</i> vs <i>bit</i> within LSB and MSB acronyms. For example, 6.3.1.1 (Signed LSB integers) states <i>bit</i> while 6.3.1.3 (Signed MSB integers) states <i>byte</i> . And, 6.3.1.4 does not indicate either <i>bit</i> or <i>byte</i> .
7.1.4	Will the bundle identifiers form (xxx:xxx:xxx) cause any string encoding / parsing problems within XML document readers / parsers? Specific example within Image_Grayscale: <logical_identifier> URN:NASA:PDS:example.DPH.Product- ImageGrayscale.MPFL-M-IMP-2-EDR-V1.0 </logical_identifier>
7.4	"Filenames must be unique within directories." Is now the time for? "Filenames must be unique within an archive."?
8	Does this entire chapter need to exist? Why have a "Astronomical Nomenclature" section within a PDS standards document? Yes, the first paragraph has some mention of naming convention within archives. Seems we need only this small statement along with the exist- ing IAU reference.
10	Cartographic Standards: Clearly needs updat- ing for PDS4. I expect to be involved in this process. Already working with Elizabeth, oth- ers. For this process, will consider Federal Ge- ographic Data Committee (FGDC) data stan- dards along with input from ISIS cartography development.
	Larger topics are yet to be address.
	Side thought: Rather than try to define all an- ticipated map projections, should we build a base structure to which projections are added as included (or migrated from PDS3) within

14.1 "The following summary of SI unit information is extracted from The International System of Units." Include reference of extraction source.

archives?

"Byte" is the correct version of the acronym. Fixed throughout (and hopefully clarified).

Chapter has been removed.

general Per various "TBD"s throughout documents, these should be updated (or drafts added) ahead of external review.

> Minor oddity: For some pages, the 'heading' at top of each page can be confusing. That is, the heading title and section numbering there can 'conflict' with the actual upcoming section number. Small example, the start of page 19 is still part of 3.1 even though the heading shows section 3.2 (indicating 3.2 starts on this page). A more glaring example would be the "2.5 Context Directory" table on page 13. It appears to have a "2.6 Data Directory" context (due to the page header). Suggest reducing heading font or heading location (center?). Or, force headings to reflect current chapter rather than section?

all docs Archive Structure: Some traditional directory names have changed from PDS3 to PDS4. The "negative" of this is familiarity with names within PDS3. However, the new names readily identify a new PDS4 archive (good). So, with the new directory names, I think we need additional clarity on what belongs in each directory (e.g. index files in About directory per my comment a few lines below).

> For the upcoming external review, the sample structure provided should contain all directories (and sample file content) as listed in the standards reference. (e.g. sample is missing "about", "calibration", "geometry", "spice" directories.

> As related, sample aareadme.txt and errata.txt are in PDS3 form vs PDS4 (intended to be PDS4?)

Directory names should be consistent within documents and sample archive (e.g. xml\_schema vs schema, document vs documents, etc).

Per Standards Ref "2.2 About Directory", I assume the PDS4 equivalent of the PDS3 index.tab file goes here? True? If so, a sample table should be provided.

King The Standards Reference is well written, but general has some vagueness which needs to be addressed. The directory structure for a generic "collection" is not described. The directory structure for a "bundle" may not be a Data Provider can deliver data, especially for incremental deliveries which would typically be single collections. This document seems to be at least three separate documents. One covering the PDS specified directory layout, one summarizing external standards which apply to PDS content and usage and one on Nomenclature Rules. having three documents would be preferred. Chapter 3 might be more appropriate in the Concepts document, though a separate document dedicated to describing products might be better focused. That is the intent of the current DPH, this chapter would be a good starting point for a re-write of the DPH. 1.1 Data Policy: This section can be omitted. It Agreed; section deleted. will be part of the Policies and Processes document. If it is kept it should be adopted data policy verbatim. 1.2 Purpose: The list of PDS documents is nearly Not sure what you mean by "orthogoorthogonal. The Archive Preparation Guide nal"; however, I have modified the text and Data Providers Handbook are really tutoof the paragraph and dropped the list of rials. I would include them as such. documents in lieu of a reference to the bibliography. 1.4 Audience: Replace "(Those new to the PDS should first read the DPH.)" with something like. The reader should be familiar with the contents of the "PDS Concepts", "PDS Policies and Procedures" and have a general understanding of the "PDS Data Dictionary". 1.5 Document Organization: I know this is a stan-Section has been completely re-written. dard JPL template for a document, but this sec-Hopefully it's a little more useful now. tion is superfluous. Do I need to know introductory information is in the "Introduction". This section could be removed. 1.6 References to "Planetary Science Data Dictionary" and "Planetary Data System Data Preparation Workbook Version 3.1" are outdated. This is for PDS4 so aren't these obsolete?.

xxii

2

[First paragraph] states that "Data Providers must deliver data in the following directory structure". Deliver to who? Presumably to PDS. Operationally, Data Providers would typically deliver Collections and not whole "archive" bundles where multiple related collections are assembled. While PDS may always create archives with this layout, it is not practical for a Data Provider. Conversely, a user may only want individual collections, so when PDS becomes the Data Provider (through user services) it too may not need to deliver a bundle as described.

A brief overview of what information is conveyed in the directory/file layout tables would be useful. I can guess that "fixed" means that the name must be as shown. Also, what does "Class" mean. I can guess that the XML document must contain at least the specified class.

2.1 The description of the contents for each file would be easier to read and scan if they were formatted like the following:

#### aareadme.xml

A brief overview of the contents...

2.2 A standard heading for the section containing the directory layout table would help to differentiate the narrative from the table. Perhaps "Layout" or "Directory Layout".

Describe the expected files with the same detail as under "Root Directory".

Now I'm a little confused. In "root" there is a "bundle.xml" which describes a bundle. A bundle can refer to "Collections". In "about" is a "collection\_misc.xml". Is this directory structure for a Collection? If so, why is "bundle.xml" present? If this is a for a bundle, who (how?) would I specify more than one collection?

2.3 Note in the text, perhaps at the beginning of the paragraph or as the second sentence the cardinality of the directory. In this case its optional. This would be true for each directory section.

#### CONTENTS

Change "facilitate use of the archive" to "facilitate use of the collection". I'm assuming this is a collection and that both ad hoc and archive collections would adhere to the same structure. Hence the generic reference to "collection".

Footnote (6) implies that multiple collections can exist. So this overall directory structure is for a "bundle"? This would make much more sense if it was for a "collection". Since the "root" directory can have any name, then it corresponds to the "collection" name. Adopting a class-style directory layout would be much simpler and would avoid compound name for folders and files.

- 2.6 The statement "The data directory contains one or more data collections." means this really a bundle, but what is the standard template (or layout) for a collection? It appears to be
  - root

collection.xml manifest.tab products product.xml

This raises a fundamental question. If "root" sets the context, why does "products" have a context prefix? Using "browse" as an example the path reference to the products would be "browse/products" which is semantically as rich and does not contain redundant information. The current specification is have semantic overloading, for example "browse/browse\_products".

- 2.10 States that "There is only one XML schema collection per archive." Really? What if there is a version change in the schema and some collections adhere to a previous version.
- 3 Paragraph starting with "As has been stated elsewhere..." is incomplete and unnecessary. It could be stated in one the previous paragraphs that "Any type of object with a label; including images, documents, and spacecraft; is considered a product."

xxiv

3.1 The statement "Within the PDS archive, three types of products are recognized: standard products,..." now overloads the term "product". Another higher order term is needed. Perhaps "entity", "resource" or "grouping".

- 3.2-3.4 Isn't there a hierarchy (as described in the Concepts document) that Bundles contain Collections and Collections contain Products (see figure below). In section 3.4 that statement "bundles consist of a list of references to products" implies a bundle may contain just "standard products", in which case, a "bundle" would be no different than a "collection". This is a clear example why "products" is an overloaded term in this context.
- 4 Is it "PSDD" or "PDD"?

There is no "section IV".

- 4.4 Example should be in XML.
- 5 I need to check the DD, but it would make more sense the name of base classes have a more consistent naming convention. Use "Table" instead of "Table\_Base", "Array" instead of "Array\_Base".
- 5.1 Refers to "Unencoded Stream Base" which is not mentioned in intro.

Delimiters are required to be fixed width. This should be mentioned.

- 5.2 Change "has two associated classes" to "is composed of two classes" because there is a life-cycle dependency of the two associated classes. That is, Array\_Base cannot exist without the Array\_Axis and Array\_Element members.
- 5.3 Based on the descriptions it's hard to tell the difference between Parsable and Encoded. It seems it's either text (Parsable) or binary (Encoded). Shouldn't this be Unicode\_Byte\_Stream and Binary\_Byte\_Stream?

6.1	Why is there "ASCII_AnyURI" when there is no other instance of "AnyURI" like there is with "ASCII_Date_Time_*". Using just "ASCII_URI" would suffice.	
	Why no "ASCII_Text_Collapses"? There are many examples of text (more than 255 charac- ters) where line control and spaces are irrele- vant. For example, this is true with most con- tent of HTML pages.	
	There are "UTF8" versions for strings. Since UTF8 is backward compatible with 8-bit ASCII why not just use "UTF8" everywhere?	We do this because there are situations where we are deliberately limiting the character set to ASCII. In some cases, we don't want any special characters.
7.1	More introductory text is needed. Some infor- mation about how to read the format specifi- cation would be helpful. For example, how to read something like:	
	product logical identifier (lid) = <collection logi<="" td=""><td>cal identifier&gt; ":" <specific identifier=""></specific></td></collection>	cal identifier> ":" <specific identifier=""></specific>
7.1.1	Why a 255 character limit? Nice binary num- ber, but unnecessary unless there's a technical reason. One consideration might be whether the LIDVID can be expressed in a URL. While HTTP does not specify a limit, Internet Ex- plorer limits URLs to 2083 characters. Even with a generous allowance for protocol, host and service strings in a URL length of 1024 would be more friendly.	
7.1.2	These rules do [not?] match those in the Concepts document.	
7.1.3	Why use underscore ("_") as a delimiter when ":" is used elsewhere?	
	Examples would be helpful.	
	Taken as a whole the specification for an iden- tifier is:	
	specific identifier = a string, determined by the d product logical identifier (lid) = <collection logi<br="">product versioned identifier (lidvid) = <product collection logical identifier (lid) = <bundle logic<="" td=""><td>cal identifier&gt; ":" <specific identifier=""> logical identifier&gt; "::" <product id="" version=""></product></specific></td></bundle></product </collection>	cal identifier> ":" <specific identifier=""> logical identifier&gt; "::" <product id="" version=""></product></specific>

collection versioned identifier (lidvid) = <collection logical id= ""::" <collection version id> bundle logical identifier (lid) = "URN:NASA:PDS:" <specific identifier> bundle versioned identifier (lidvid) = <bundle logical identifier> "::" <bundle version id>

#### xxvi

This means that a product identifier is dependent on a pre-determined grouping. Since some products (like documents) may be members of multiple groups this can present problems when forming alternate collections and bundles in accordance with the directory naming conventions (described in this same document). While this approach may result in a natural uniqueness (provided bundle names are unique), it's unclear how to reconcile the identifier to directory structure mapping.

- 7.2.3 Digital Object Identifiers: Wouldn't these be local IDs?
- 7.4 Rules: Yippee! PDS finally got it right on file <sup>(i)</sup> names.
- 8.1 Strike sentence "Questions have been asked about the proper English..."
- 8.4 Strike sentence "Contrary to some recent media Ditto. reports..."
- 11 Not clear what is the purpose of this chapter. Currently it reads like dictionary definitions, but should provide guidelines for the content. If it remains it should follow and be included in the same document as the directory layout information.
- 12 The requirement that a flat ASCII version be included (I hope) is just un-edited, non-updated text and won't be part of the PDS4 requirements. It should follow and be included in the same directory as the directory layout information.
- Law general The Standards Reference has a good start. As it is a "work in progress", lots more effort still needed to complete and clean it up. It has a good layout. Excellent questions and notes are included in this draft. It points out a number of issues have yet to be resolved by the DDWG before the document can become a solid reference.

Chapter has been removed in response

to other reviewers' comments.

#### xxviii

Martin

- 2.1 I think you should standardize on index.html as the entry to a PDS data set. Should provide a standard html template for introducing a data collection. I don't think aareadme.xml is a good idea.
  - 2.2 Does "About" directory replace ERRATA directory?
  - 2.5 Why are some names the same between the file name and the class name but some are different (e.g. context\_publication.xml vs Product\_Citation)? The context discussion starts talking about system bundles and secondary bundles, neither of which were discussed in the concept document.
  - 2.10 "XML Schema Directory" stops prematurely.
  - 3 PDS Product consists of one or more objects. This seems to be embracing the "explicit file" architecture of PDS3 where a single label file can point to multiple object files. This design was and is a complete failure. As far as I know no one has ever written any software to work with explicit file objects.

"There is always a one-to-one correspondence" for products, but not for objects?

3.1 Files are not really discussed in the ensuing paragraph.

Objects = digital, physical, conceptual Objects = digital, nondigital Objects = tagged, what is the alternative? Object = class

Product = single label + tagged object(s) Types of Products = standard product, collection, bundle

- 4 "PDS product labels are required for describing the contents and format of each individual product" but products are made up of objects, maybe multiple objects stored in different files.
- 5 The Encoded\_Byte\_Stream is an option for the storage format for PDS4 objects. It is not a "fundamental data structure".

I'm open to changing it, but this is the filename decided upon after a discussion of the topic by the DDWG.

To my knowledge, we never had an ER-RATA directory. The ERRATA *file* is now included in the "About" directory. Ordering of elements. I think it is odd to require a certain ordering (e.e. "FIRST\_INDEX\_FASTEST") but still have a keyword for it. Having a keyword makes it seem like an option.

- 5.3 Parsable Byte Stream is MIA.
- 5.4 Encoded Byte Stream. This doesn't tell me much. Can I provide data products in PNG, PDF, FITS, GIF, JPEG, CDF, NETCDF, HDF5, TIFF, GEOTIFF?
- 6 Chapter 6 is not very useful the way it is presented.
- 6.3 Do you really want to allow LSB int's.
- 6.4.1 What about vectors?
- 6.4.2 Quaternions. I'm not sure I see the point of the segment on quaternions. There is not enough information to be useful.
- 7.1 Identifiers. I don't find this section to be very useful.
- 7.2.1 "The minor portion of the version is notprepadded with zeros; it is simply incremented as an integer..." So a list of items sorted by version number may not come out in sequential order.
- 11 Context Information. I would question whether the old delivery mechanism is still appropriate for [this component]. I think we should have an on-line content management system that handles all of this.
- 12 Documentation. Same as above. Ditto.

We chose in PDS4 to make everything explicit, so that a data user would not need to have assumed knowledge about the PDS format to understand the data.

The content of this chapter is necessary to preparing data in compliance with the

PDS4 standards. How would you prefer

A significant proportion of the data already in PDS archives is in LSB format;

to see it presented?

yes, we do want to allow it.

That online content management system is included in the system and data model design. However, we still intend to archive the basic components of the system.

CONTENTS

		units being used in products. This section needs to discuss the rules for using units in PDS4 XML labels.	
McLaughlin	general	I only had time to skim the Standards Refer- ence so my comments are quite limited. First the document is presently organized in a rea- sonably comprehensible and useful manor.	
	2	However the use of the data modeling terms such as "class" and "cardinality" so early in Chapter 2 seems premature. Cardinality de- termines if an entity is required or optional in the root structure of an archive and how many occurrences are allowed (such as one- and-only-one or many), so why not use words in place of encoded strings such as "01" and "1*"? Many users of the standards will prob- ably *not* be data modelers.	
	8	Finally Chapter 8 states that PDS requires the use of IAU nomenclature, so why not simply direct the reader to the appropriate IAU and USGS web sites and publications instead of du- plicating some of that content in the standards?	The section on Astronomical Nomen- clature has been removed.
Simpson	1	These are the standards for PDS Version 4, not version 4 of the PDS standards. It is PDS4 that is not backwards compatible.	"version 4 of the PDS standards" vs. "the standards for PDS, version 4"; not sure I agree with you on this one.
	1.1	Why would PDS funding be used to publish non-compliant data?	Under PDS3, this occurred specifically in the instance of "safed" data. Anyway, the section has been dropped.
		"(Do we wish to drop the statements about waivers?)" – Yes!	Section dropped.
	1.2	"as a reference" – replace "a" with "the" Other documents provide supplementary info, exam- ples, etc. SR is the primary REF doc.	Done.
		Delete <i>Archive Preparation Guide</i> ; APG is not a REF	This section doesn't describe refer- ences, but rather other documents to be used in conjunction with the StdRef. However, I've decided to drop the entire list in lieu of a reference to the bibliog- raphy.
		Delete PDS Policies and Processes	Ditto

The units in PDS3 were mainly for annotation. There were only a couple cases of non-default

XXX

14

### CONTENTS

	Delete Proposer's Archiving Guide; Not a ref.	Ditto
	Uncertain about inclusion of SPICE Archive Preparation Guide	Ditto
	Delete tutorials; not ref.	Ditto
1.4	Third line, delete "standards".	Done
1.5	Outline isn't even close to what follows.	Section has been completely re-written.
1.6	Most of these are NOT cited.	All referenced or other important docu- ments transferred to bibliography; sec- tion deleted.
	There are a ton of Refs in Chapter 10 that are missing from this list.	The references in Chapter 10 have been listed in the bibliography.
	IAU Style Manual (SR p.57)	Still need to add to bibliography.
1.8	Need to define "data engineer".	
2	This chapter needs a few words at the begin- ning to explain format of tables and terms being used (class, cardinality, volume,).	A full paragraph of explanatory text has been added.
	What is a directory in the context of PDS4?	
	First paragraph: If the PDS DN changes the structure, what happens to all the URIs? 7.2.4 needs to be very clean and rigorous.	
	First paragraph: is this relevant?	
	Second paragraph: Need to explain what a product is and then identify the possible product types.	
	Footnote to this section: remove the word "multiple".	Done.
2.1	"Root" in the section title should be all upper- case.	
	Is ROOT a named directory, is it implicit, or can it be either?	
	First paragraph: "bundle" is undefined.	Chapters 2 and 3 have been switched; should solve this problem.

True that they're not there yet. I believe

Steve intends to add them in the future.

The file names listed here are not in the Information Model.

Make sure that tables don't get split across pages.

#### Not all comments entered yet.

Slavney 2.1 Root Directory: Specify which subdirectories are required and which are optional.

It says one bundle.xml file per root directory. Does that mean one bundle = one data set per root directory? That is, no more putting multiple "data sets" on a "volume"?

Do we still need a Geometry directory? I have seldom seen it used. Doesn't SPICE suffice?

Re SPICE: Don't we still want to store SPICE data separately at NAIF? Why is this part of the directory structure? What if there are different versions of the SPICE kernels at NAIF, which are the right ones to use? Etc.

- 3 "Data Objects and Products" "Thus, in addition to traditional data products such as images, tables, and histograms, missions and spacecraft are now also treated as products." I can't understand how a mission or a spacecraft can be a product. Products must be digital. What is the benefit of considering physical objects to be products?
- 6.1 "Attribute Data Types" Does the ASCII\_Real type include numbers in scientific notation? (e.g. 1.0E-16) If so, say so; if not, make another type.
- 7.1 "Identifiers" Include realistic examples of each type.
- 7.4 "Filenames" Are spaces allowed in file names? Windows allows them but I wish they didn't. Web browsers will try to escape them. Let's say explicitly that they're not allowed.

There's a link to a Wikipedia article on file names. Do we have any qualms about using Wikipedia as a reference? 8

"Astronomical Nomenclature" Why is this here if it's already on the IAU web site? Just provide the link. This detailed information does not seem relevant to PDS archiving.

- 10 I did not review Chapter 10 on Cartographic Standards as it all needs to be re-written. Let's get expert help to do this.
- 12 Can we get rid of the requirement that all documents must exist as plain ASCII text? I thought the use of PDS/A would relieve us of this. The Concepts documents seem to say so (section 11).

This section has been removed.

This section has been updated for version 4.0.3 (with the exception of 10.6, which is waiting on definition of the cartographic classes). Lisa Gaddis was consulted on several points of ambiguity.

#### xxxiii

xxxiv

## **Responses to Build 1C Assessment**

**Reviewer Section Comment** 

Response

Pending completion of 1c assessment.

xxxvi

## Chapter 1

# Introduction

The Planetary Data System (PDS) Standards Reference is a complete specification for version 4 of the PDS standards. These standards are used to design data storage formats and encode descriptive labels for data stored in the PDS.

Note that version 4 of the PDS standards is *not* backwards compatible with version 3. All version 4 data can be described using version 3 labels, but the converse is not true.

This document *does not* provide a formal definition of the grammar of the eXtensible Markup Language (XML), which is used to encode the PDS4 standards; guidance on this aspect of PDS labels is provided in the Data Provider's Handbook (DPH).

#### 1.1 Purpose

This document is intended to serve as the reference document detailing PDS standards used in the preparation of PDS compliant data. It is to be used within the context of the PDS4 document suite, described in the *Introduction to the PDS4 Document Set*. (Please see the bibliography at the end of this document for a full listing of PDS documents available.) Would like to insert a \ref to the bibliography but can't figure out how to assign a target label to it. - EDR

#### 1.2 Scope

The information included here constitutes Version 4.0 of the Planetary Data System data preparation standards for producing archive quality data sets. This document covers the conceptual composition of an archive, its physical layout, and the current technology standards used for implementing the data and meta-data.

#### **1.3** Audience

This document is intended primarily to serve the community of scientists and engineers responsible for preparing planetary science data sets for submission to the PDS. These include restored data from the era prior to PDS or from earlier versions of the PDS, mission data from active and future planetary missions, and data from earth-based sites. The audience includes personnel at PDS discipline and data nodes, mission principal investigators, and ground data system engineers. This document is intended for use by those people already somewhat familiar with the process of archiving data with the PDS. (Those new to the PDS should first read the DPH.)

#### **1.4 Document Organization**

This document is divided into three main sections. The first of these, "Archive Structure Standards", provides detailed information about the structure of all of the components of a PDS archive: labels, data, bundles, collections, and overall organization. The second major section, "Data Content Standards", is more focused on the nature of *what* is stored in PDS archives. This includes guidance on necessary calibration information, contextual information, and documentation, as well as how to populate cartographic information, date and time values, and various nomenclature rules. Finally, the Appendices contain detailed listings of specific classes used in describing PDS data.

#### 1.5 External Standards

External standards which apply to the content of this document:

What about ASCII and UTF-8 standards? - EDR

Consultative Committee for Space Data Systems (CCSDS):

- 1.6. ONLINE DOCUMENT AVAILABILITY
  - CCSDS 641.0-B-2 Parameter Value Language Specification (CCSD0006 and CCSD0008) (also available as ISO 14961:2002)

Institute of Electrical and Electronics Engineers (IEEE):

• IEEE 754-2008 Standard for Binary Floating-Point Arithmetic

International Standards Organization (ISO):

- ISO 646:1991 ISO 7-bit coded character set for information interchange
- ISO 8601:1988 Data Element and Interchange Formats Representations of Dates and Times (Shouldn't this be 8601:2004? EDR)
- International Standards Organization / International Electrotechnical Commission (ISO/IEC) 11179-3:2003 Metadata registries (MDR) – Part 3: Registry metamodel and basic attributes
- ISO/IEC 11404:2007 General-Purpose Datatypes (GPD)
- ISO 14721:2003 Open archival information system Reference model
- International Standards Organization / Technical Standard (ISO/TS) 15000-3:2004 electronic business eXtensible Markup Language (ebXML) – Part 3: Registry information model specification (ebRIM)
- ISO/TS 15000-4:2004 *ebXML Part 4: Registry services specification (ebRS)*

National Institute of Standards and Technology (NIST):

• NIST Special Publication 330 *The International System of Units (SI)*, United States version of the English text of the eighth edition (2006), Issued March 2008

World Wide Web Consortium (W3C):

- XML 1.1 2nd ed., August 16, 2006
- XML Schema Part 0: Primer 2nd ed., October 28, 2004
- XML Schema Part 1: Structures 2nd ed., October 28, 2004
- XML Schema Part 2: Datatypes 2nd ed., October 28, 2004

#### **1.6 Online Document Availability**

All PDS documents pertaining to archive preparation are available online. Information on accessing these references may be found on the PDS website at the following URL:

#### http://pds.nasa.gov

To obtain a copy of these documents or for questions concerning these documents, contact the PDS Operator (at pds\_operator@jpl.nasa.gov, 818-393-7165) or any PDS data engineer.

The examples provided throughout this document are based on both existing and planned PDS archive products, modified to reflect the current version of the PDS Standards. Discipline-specific extensions to the high-level classes defined in this document are created and augmented from time to time, as user community need arises. To check the current status of any discipline- or mission-specific class definition, consult a PDS data engineer.

Additional schemata and examples are available online at the following URL:

http://pds.nasa.gov/repository/pds4/SCHEMA/

# Part I

# **Archive Structure Standards**

# Chapter 2

# Archive Organization and Directory Contents

An archive *bundle* is the primary construct for delivering digital data to the PDS.

Bundles have a simple hierarchical structure. A bundle has one or more member collections, each of which has one or more member basic products.

Data is organized into collections based on the type and function of the data. So, for example, observational data from a particular instrument and of a particular processing level might constitute one collection; low resolution representations of the observational data for browsing purposes might constitute a second collection; documentation describing the data collection and calibration process might constitute a third collection; geometry information re-




Figure 2.1: Overall bundle structure.

lated to the observational data represented in SPICE format might constitute a fourth, etc.

Data providers will typically deliver data to the PDS in a directory structure that matches the organization of the bundle. The data will be delivered to the deep archive in this format; however, PDS discipline nodes may or may not choose to retain this structure in their online repositories.

The following sections describe the contents of an archive repository starting with the root directory, followed by the contents of the subdirectories in alphabetical order. In the tables that follow, a **bold-faced** font is used for directories, while plain type is used for files. Fixed or mandated file names are shown in regular font; sample file names are shown in *italics*. The "class" identifies the Planetary Data System, standards version 4 (PDS4) class used in the specified label to describe

associated objects. Files for which no class is identified are described in separate label files. "Cardinality" refers to the number of instances of a particular file or directory type that may occur in an archive. Where a single digit appears, the archive must include precisely that number of files (or directories). Where a range of numbers is specified (using the notation m..n), then any number of files in that range may be included. A minimum of "0" means that the file or directory is optional; a maximum of "\*" means that there is no limit on the number of files that may be included.

#### 2.1 Root Directory

The root directory corresponds to the top level of an archive bundle. It contains several directories and one or two files.

File or Directory Name	Class	Cardinality	Name Fixed?
root	_	1	not fixed
bundle.xml	Product_Bundle	1	fixed
readme.[html,txt]	_	01	fixed
browse[_*]	_	0*	prefix fixed
calibration[_*]	_	0*	prefix fixed
context[_*]	_	0*	prefix fixed
data[_*]	_	1*	prefix fixed
document[_*]	_	0*	prefix fixed
geometry[_*]	_	0*	prefix fixed
miscellaneous[_*]	_	0*	prefix fixed
schema	_	1	fixed
spice[_*]	-	0*	prefix fixed

The label for the archive bundle product shall reside in the root directory of the respository. This label provides the identifying information for the bundle and contains a list, in XML format, identifying all of the component collections of which the bundle is comprised.

The bundle product shall be implemented using the Product\_Bundle class. There must be one, and only one, of these files included in each bundle. The filename, "bundle.xml", is fixed.

A second, optional, "readme" file provides a general overview of the bundle contents and organization in human readable format. It may also contain general instructions for use of the archive and contact information for data preparer or discipline node personnel. This file may be formatted either as plain text or HTML. Note that this file is an optional component of the archive bundle product, and is not considered to be a separate product. Thus, it shares a label with the archive bundle. It is described using the File\_Area\_Text class within the Product\_Bundle. (See Figure 2.2.)

#### 2.2 Subdirectories

Beneath the root directory, each top level subdirectory has a one-to-one correspondence with the bundle's collections. Each collection comprises an XML label, one to three inventory tables, and one or more member basic products. Collections may be comprised of *primary* or *secondary* basic product members, or a mixture of both.

Basic products are primary members of the collection within which they first enter PDS4. Every basic product must be a primary member of one (and only one) collection. (Note that each new version of a basic product is considered to be a primary member of its collection.)

A basic product may be a secondary member of any number of collections. A collection which lists references to basic products already registered in PDS would identify those products as its secondary members. (Secondary member products might be included in a collection for a new purpose or because of their relevance to other collections in a bundle. For example, a collection of secondary products might consist of previously archived Voyager images of Saturn which have been identified as containing Saturn's rings within the field of view. Alternatively, a collection of primary products containing geometrically corrected images might be accompanied by a collection of secondary copies of SPICE files already archived by Navigation and Ancillary Information Facility (NAIF).)

Note that data providers are not obligated to include physical copies of secondary member products with a delivered collection, since they are already present within the PDS repository as primary members of another collection. However, for the sake of the convenience of data users, it is permissible to include copies of these products. (PDS nodes, on the other hand, are obligated to deliver copies of these products when the collection is submitted to the deep archive.)

Inventory tables identify the basic products contained in a collection. Primary member products are identified by a LIDVID. Secondary member products may be identified by either a LID or a LID-VID. (See 6.1.1 for more information on LIDs and LIDVIDs.) Each collection shall contain one inventory table listing all of the primary members of the collection, one inventory table listing all of the secondary members identified by LIDVID, and one inventory table listing all the secondary members identified by LID. If basic products of a particular type are not included in the collection, then the inventory table for that type of member product shall not be included either.

Inventory tables are a subclass of the Table\_Base class and therefore have records of fixed length. They contain one record for each basic product they identify. Each record in an inventory table which identifies primary members shall consist of the LIDVID for that member product, followed

#### CHAPTER 2. ARCHIVE ORGANIZATION AND DIRECTORY CONTENTS

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="PDS4_PDS_0700j.sch"?>
<Product_Bundle
  xmlns="http://pds.nasa.gov/pds4/pds/v07"
  xmlns:pds="http://pds.nasa.gov/pds4/pds/v07"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://pds.nasa.gov/pds4/pds/v07
  http://pds.nasa.gov/pds4/pds/v07/PDS4_PDS_0700j.xsd"
  xsi:type="pds:Product_Bundle">
  <Identification_Area>
    <logical_identifier>urn:nasa:pds:mars_mpf_imp_raw</logical_identifier>
    <version id>1.0</version id>
    <title>MPF Imager for Mars Pathfinder Raw Data Archive</title>
    <information_model_version>0.7.0.0.j</information_model_version>
    <product_class>Product_Bundle</product_class>
  </Identification_Area>
  <Bundle>
    <description>
     This archive contains the raw data recorded by the Imager for Mars Pathfinder
     mounted on the Mars Pathfinder Lander. The data was submitted to the
     Planetary Data System (PDS) by Peter Smith, IMP Principal Investigator. This
      archive covers the period from 1996-12-16 to 1997-09-27.
    </description>
    <bundle_type>Archive</bundle_type>
  </Bundle>
  <Bundle_Member_Entry>
    <file_specification_name>browse/collection_browse.xml</file_specification_name>
    <lid_reference>urn:nasa:pds:mars_mpf_imp_raw:browse</lid_reference>
    <member_status>Primary</member_status>
    <reference_type>has_browse_collection</reference_type>
  </Bundle_Member_Entry>
  <Bundle_Member_Entry>
    <file specification name>context/collection context.xml</file specification name>
    <lid_reference>urn:nasa:pds:mars_mpf_imp_raw:context</lid_reference>
    <member_status>Secondary_With_File</member_status>
    <reference_type>has_context_collection</reference_type>
  </Bundle_Member_Entry>
  <Bundle_Member_Entry>
    <file_specification_name>data/collection_data.xml</file_specification_name>
    <lid_reference>urn:nasa:pds:mars_mpf_imp_raw:data</lid_reference>
    <member_status>Primary</member_status>
    <reference_type>has_data_collection</reference_type>
  </Bundle_Member_Entry>
  <Bundle_Member_Entry>
    <file_specification_name>schema/collection_schema.xml</file_specification_name>
    <lid_reference>urn:nasa:pds:mars_mpf_imp_raw:schema</lid_reference>
    <member_status>Primary</member_status>
    <reference_type>has_schema_collection</reference_type>
  </Bundle_Member_Entry>
</Product_Bundle>
```

#### 2.2. SUBDIRECTORIES

by the file specification name, in UNIX format relative to the directory containing the collection label, of the XML label for the basic product. The records of inventory tables identifying secondary members shall consist of only the LID or LIDVID. An example of an inventory table is shown in Figure 2.3.

The label for each collection and its associated collection inventory tables shall reside in a top level subdirectory. The member products for each of the collections shall reside in lower level directories, named and organized according to the preference of the data provider. (An exception is made to this rule for collections containing less than roughly two dozen products, in which case the products and their labels may reside alongside the collection label in the top level subdirectory. See Figures 2.4 and 2.5.)

In cases where a bundle contains multiple collections of the same type, the names of the subdirectories containing these collections shall be distinguished by a suffix of the data provider's choosing appended to the mandated directory name. For example, if two calibration collections are present in the archive, the two calibration directories might be named **calibration\_ground** and **calibration\_flight**. The labels and inventory tables for the two collections would then be distinguished in a similar fashion with names such as **collection\_calibration\_ground.xml** and **collection\_calibration\_ground\_inventory.tab**. (See Fig. 2.6.)

A sample collection label is shown in Figure 2.7.

urn:nasa:pds:mars_mpf_imp_raw:catalog.xml::1.0	,catalog.xml	<cr><lf></lf></cr>
urn:nasa:pds:mars_mpf_imp_raw:imaging_dictionary.xsd::1.0	,imaging_dictionary.xsd <cr><lf></lf></cr>	sd <cr><lf></lf></cr>
urn:nasa:pds:mars_mpf_imp_raw:mpf_dictionary.xsd::1.0	,mpf_dictionary.xsd	<cr><lf></lf></cr>
urn:nasa:pds:mars_mpf_imp_raw:mpf_imp_raw.sch::1.0	,mpf_imp_raw.sch	<cr><lf></lf></cr>
urn:nasa:pds:mars_mpf_imp_raw:schema:PDS4_PDS_0600h.xsd::1.0,PDS4_PDS_0600h.xsd	0,PDS4_PDS_0600h.xsd	<cr><lf></lf></cr>
urn:nasa:pds:mars_mpf_imp_raw:schema:PDS4Schematron.sch::1.0,PDS4Schematron.sch	0, PDS4Schematron.sch	<cr><lf></lf></cr>

# Figure 2.3: Example of an Inventory Table

#### 2.3 Browse Directory

Each browse directory contains a browse collection. Browse collections contain "quick-look" products designed to facilitate use of the archive. Browse products and the browse directory are optional.

File or Directory Name	Class	Cardinality	Name Fixed?	
browse[_*]	_	0*	fixed <sup>1</sup>	
collection_browse[_*].xml	Product_Collection	1	fixed <sup>1</sup>	
collection_browse[_*]_inventory.tab	_	1	fixed <sup>1</sup>	
cruise	_	1*	not fixed	
cruise_01.xml	Product_Browse	1*	not fixed	
cruise_01.jpg	—	1*	not fixed	
÷	:	÷	÷	

<sup>1</sup>In the case of multiple browse collections these fixed names may be modified by adding a suffix to distinguish among the collections. For example: **browse\_raw** and **browse\_calibrated**, collection\_browse\_raw.xml and collection\_browse\_calibrated.xml.

For each browse collection present in the archive, there shall be one **browse** directory, one collection\_browse\_inventory.tab file, and one collection\_browse.xml file. If only one browse collection is present, these names are fixed. If more than one browse collection is present, these names may be suffixed with an additional identifying word preceded by an underscore, to distinguish the collections. In all such cases, the collection label, inventory, and directory must all be clearly identified with one another by utilizing the same suffix.

The browse collection shall be implemented using the Product\_Collection class.

If appropriate, each browse directory may contain multiple levels of sub-directories. The structure of these sub-directories is at the discretion of the data provider. A structure that parallels the structure of the data subdirectories is frequently utilized.

#### 2.4 Calibration Directory

Note that standards regarding the archiving of calibration data are still under discussion; the information shown in this section is only a rough draft.

The calibration directory contains calibration data and files necessary for the calibration of science data products.




Figure 2.4: Subdirectory containing one collection and many products.




Figure 2.5: Subdirectory containing one collection and few products.

#### 2.4. CALIBRATION DIRECTORY

```
root
   - calibration_flight
        - collection_calibration_flight.xml
        - collection_calibration_flight_inventory.tab
        - cruise
             - flightcal_product01.jpg
             - flightcal_product01.xml
             - flightcal_product02.jpg
             - flightcal_product02.xml
        - orbit_0001-0100
   - calibration_ground
       - collection_calibration_ground.xml
       - collection_calibration_ground_inventory.tab
       - 2010-03
             - 2010-03-14_0001.jpg
             - 2010-03-14_0001.xml
             - 2010-03-14_0002.jpg
             - 2010-03-14_0002.xml
```

Figure 2.6: Two subdirectories containing collections of the same type.

#### CHAPTER 2. ARCHIVE ORGANIZATION AND DIRECTORY CONTENTS

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="PDS4_PDS_0700j.sch"?>
<Product_Collection
  xmlns="http://pds.nasa.gov/pds4/pds/v07"
  xmlns:pds="http://pds.nasa.gov/pds4/pds/v07"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://pds.nasa.gov/pds4/pds/v07
  http://pds.nasa.gov/pds4/pds/v07/PDS4_PDS_0700j.xsd"
  xsi:type="pds:Product_Collection">
  <Identification_Area>
    <logical identifier>urn:nasa:pds:mars mpf imp raw:schema</logical identifier>
    <version id>1.0</version id>
    <title>MPF Imaging for Mars Pathfinder Schema Files</title>
    <information_model_version>0.7.0.0.j</information_model_version>
    <product_class>Product_Collection</product_class>
  </Identification_Area>
  <Collection>
    <collection_type>Schema</collection_type>
  </Collection>
  <File_Area_Inventory>
    <File>
      <file_name>collection_schema_inventory.tab</file_name>
      <local_identifier>FILE</local_identifier>
      <creation_date_time>2012-03-07T10:16:03.462Z</creation_date_time>
      <file_size>510</file_size>
      <records>6</records>
      <md5_checksum>899fba057920491a08c7d517bd65e717</md5_checksum>
    </File>
    <Inventory>
      <local identifier>INVENTORY</local identifier>
      <offset>0</offset>
      <records>6</records>
      <encoding_type>CHARACTER</encoding_type>
      <reference_type>has_member_LIDVID_Primary</reference_type>
      <Record_Character>
        <record_length>85</record_length>
        <fields>2</fields>
        <Field_Character>
          <name>LIDVID</name>
          <field_location>1</field_location>
          <data_type>ASCII_LIDVID</data_type>
          <field_length>60</field_length>
        </Field Character>
        <Field_Character>
          <name>File_Specification_Name</name>
          <field location>62</field location>
          <data_type>ASCII_File_Specification_Name</data_type>
          <field_length>22</field_length>
        </Field Character>
      </Record_Character>
    </Inventory>
  </File_Area_Inventory>
</Product_Collection>
```

#### 2.5. CONTEXT DIRECTORY

File or Directory Name	Class	Cardinality	Name Fixed?
calibration[_*]	_	0*	prefix fixed
collection_calibration.xml	Product_Collection	1	fixed
collection_calibration_inventory.tab	_	1	fixed
preflight_200903	_	1*	not fixed
calibration_20090314a.xml	(as appropriate)	1*	not fixed
calibration_20090314a.tab	_	1*	not fixed
:	:	÷	:

#### 2.5 Context Directory

Each context directory contains a context collection. Context collections consist of XML labels for various physical and conceptual objects identified within the PDS4 registry. (This includes physical objects such as instruments, spacecraft, and planets, and conceptual objects such as missions and PDS nodes.) These context products provide only the information necessary to identify and classify these objects; they are not intended to include full textual description of the objects. (The latter should either be included in the Document collection or cited as published works in a peer-reviewed scientific journal.)

File or Directory Name	Class	Cardinality	Name Fixed?
context	_	1	fixed
collection_context.xml	Product_Collection	1	fixed
collection_context_inventory.tab	_	1	fixed
context_products	_	1	fixed
context_inst.xml	Product_Context	$01^{2}$	fixed
context_insthost.xml	Product_Context	$01^{2}$	fixed
context_investigation.xml	Product_Context	1	fixed
context_node.xml	Product_Context	1	fixed
context_resource.xml	Product_Context	0*	fixed
context_target.xml	Product_Context	$01^{2}$	fixed

<sup>2</sup>Note that the existence of these products are only required in cases where the corresponding *physical* or *conceptual* object exists and is associated with data in the archive bundle.

Data preparers should send individual context products directly to a PDS Engineering Node data engineer or their respective Discipline Nodes. PDS personnel will include these products as primary members of a PDS-wide context collection.

Since they are primary members of a PDS-wide collection, they are only to be included in archive

bundles as secondary members of a context collection. For this reason, a context collection is not required for inclusion in bundles delivered by data providers to the PDS. (However, PDS nodes are required to include copies of these files in a context collection as part of a bundle delivered to the deep archive.)

#### 2.6 Data Directory

Each data directory contains a data collection. Each data collection contains basic observational products.

For regular science archives, the data directory is required. For special archives (like a SPICE bundle or a system bundle), the directory is optional.

File or Directory Name	Class	Cardinality	Name Fixed?
data	_	01	fixed
collection_data.xml	Product_Collection	1*	fixed <sup>3</sup>
collection_data_inventory.tab	_	1*	fixed <sup>3</sup>
orbits_0001_0045	_	1*	not fixed
c194306nnn	_	1*	not fixed
c194306019.xml	(as appropriate)	1*	not fixed
c194306019.tab	_	1*	not fixed
:	:	÷	÷
c194307nnn	_	1*	not fixed
c194307053.xml	(as appropriate)	1*	not fixed
c194307053.tab	_	1*	not fixed
:	:	:	÷

<sup>3</sup>In the case of multiple data collections these fixed names may be modified by adding a prefix to distinguish among the collections. For example: edr\_collection\_data.xml and rdr\_collection\_data.xml labels would correspond to edr\_data\_products and rdr\_data\_products directories.

#### 2.7 Document Directory

Each document directory contains a single document collection. A document collection shall include all documents deemed useful by the data preparer and cognizant discipline node to the science investigator in facilitating the understanding, interpretation, and use of the data included in the archive bundle. A detailed specification for the archive's observational data products is usu-

#### 2.7. DOCUMENT DIRECTORY

ally considered to be an essential document. Examples of other types of documents that may be included in the document directory include:

archive volume specifications calibration reports data product specifications derivation and analysis techniques experiment results functional requirements documents instrument descriptions mapping descriptions and results mission descriptions peer review reports project documents project web sites software descriptions spacecraft or telescope descriptions user's manuals

**File or Directory Name** Class Cardinality Name Fixed? document fixed 1 collection\_document.xml Product\_Collection 1 fixed 1 collection\_document\_inventory.tab fixed archive\_volume\_sis sample not fixed archive\_volume\_sis.pdf 1..\* not fixed archive\_volume\_sis.xml Product\_Document 1..\* not fixed calibration\_report not fixed sample calibration\_report.doc 0..\* not fixed *calibration\_report.pdf* 1..\* not fixed *calibration\_report.xml* Product\_Document not fixed 1..\* data\_product\_sis not fixed sample *data\_product\_sis.html* 0..\* not fixed *data\_product\_sis.pdf* 1..\* not fixed *data\_product\_sis.xml* Product Document 1..\* not fixed *data\_product\_sis\_app.html* not fixed 1..\* data\_product\_sis\_intro.html 1..\* not fixed data\_product\_sis\_proc.xml 1..\* not fixed data\_product\_sis\_struct.xml not fixed 1..\*

Note, copies of published papers may be included *only if the primary publication journal permits it under their copyright rules*.<sup>4</sup>

<sup>4</sup>Note that *Space Sciences Review* permits inclusion of copies of these documents in PDS archives.

File or Directory Name	Class	Cardinality	Name Fixed?
images	_	0*	not fixed
image_01.jpg	-	0*	not fixed
image_02.jpg	_	0*	not fixed
image_03.jpg	_	0*	not fixed
:	÷	÷	:

#### CHAPTER 2. ARCHIVE ORGANIZATION AND DIRECTORY CONTENTS

#### 2.8 Geometry Directory

The geometry directory contains non-SPICE geometry files (for example, Supplementary Experiment Data Record (SEDR) data or gazetteers). Detailed information about particular cartographic projections utilized in the archive may be included here.

Note that standards regarding the archiving of geometry data are still under discussion; the information shown in this section is only a rough draft.

File or Directory Name	Class	Cardinality	Name Fixed?	
geometry	-	01	fixed	
collection_geometry.xml	Product_Collection	1*	fixed	
collection_geoemtry_inventory.tab	-	1*	fixed	
gazetteer.tab	_	1*	not fixed	
gazetteer.xml	TBD	1*	not fixed	
÷	÷	÷	÷	

#### 2.9 Miscellaneous Directory

The miscellaneous directory contains supplemental meta-data catalogs, database dumps, indices, errata files, or spreadsheets deemed by the data provider to be useful to the interpretation of the data in the archive. Any updates made to product label values after the archive is ingested may be included in the about directory in tabular form. Examples of the types of information contained in the about directory include:

database dumps errata footprint files modification history tables anaglyph pairs updates

File or Directory Name	Class	Cardinality	Name Fixed?
about	_	1	fixed
collection_miscellaneous.xml	Product_Collection	1	fixed
collection_miscellaneous_inventory.tab	_	1	fixed
miscellaneous_products	—	1	fixed
	(as appropriate)	:	:

The miscellaneous collection shall be implemented using a Product\_Collection class.

Because of the disparate nature of the files included in the miscellaneous directory, no single

The errata.xml file identifies and describes errors and/or anomalies found in the archive.

The errata shall be implemented using the Product\_Document class, and shall contain an Identification\_Area\_Document class with the product\_subclass attribute set to "ERRATA". There must be one, and only one, of these files included in each bundle. The filename, "errata.xml", is fixed.

#### 2.10 SPICE Kernel Directory

#### TBD pending input from NAIF node.

All SPICE data shall be submitted to the PDS NAIF node whether originating with missions or independent science investigators. SPICE bundles submitted to NAIF shall consist of a single SPICE collection and a single document collection.

Every SPICE kernel shall be a primary member of a SPICE collection submitted to NAIF as part of a SPICE bundle.

Copies of SPICE kernels may be included as secondary members of SPICE collections submitted to other PDS nodes as part of observational data bundles.

The SPICE collections in a PDS bundle shall contain individual SPICE kernel files and their XML labels.

File or Directory Name	Class	Cardinality	Name Fixed?
spice	—	1	fixed

File or Directory Name	Class	Cardinality	Name Fixed?
collection_spice.xml	Product_Collection	1	fixed
collection_spice_inventory.tab	_	1	fixed
ck	_	01	fixed
dbk	_	01	fixed
dsk	_	01	fixed
ek	_	01	fixed
fk	_	01	fixed
ik	_	01	fixed
lsk	_	01	fixed
mk	_	01	fixed
pck	_	01	fixed
sclk	_	01	fixed
spk	_	01	fixed

Kernel files and their XML labels must be placed in the following subdirectories based on the kernel type:

ck	CK files	(spacecraft and	instrument	orientation	data)
----	----------	-----------------	------------	-------------	-------

- dbk DBK files (databases in SPICE format)
- dsk DSK files (digital shape data for natural bodies)
- ek EK files (events information)
- fk FK files (reference frames definitions)
- ik IK files (instrument parameters and FOV definitions)
- lsk LSK files (leapsecond information)
- mk MK files (meta-kernels listing kernels to be used together)
- pck PCK files (natural body rotation and size/shape constants)
- sclk SCLK files (spacecraft clock correlation data)
- spk SPK files (trajectory and ephemeris data)

#### 2.11 XML Schema Directory

The schema collection shall contain all XML schema files included in or referenced by XML labels in the archive along with any Schematron files created for validation purposes. An XML catalog file shall also be included.

File or Directory Name	Class	Cardinality	Name Fixed?
xml_schema	-	01	fixed

<sup>5</sup>This class is defined in the PDS4\_OPS\_0700j.xsd file.

<sup>6</sup>The name of this file will vary depending on the version of the information specification used by the data preparer; however, the file, as received from the PDS, should not be renamed.

#### 2.11. XML SCHEMA DIRECTORY

File or Directory Name	Class	Cardinality	Name Fixed?
collection_schema.xml	Product_Collection	1	fixed
collection_schema_inventory_primary.tab	-	1	fixed
collection_schema_inventory_secondary.tab	-	1	fixed
schema_products	-	1	fixed
catalog.xml	-	1	fixed
catalog_label.xml	Product_XML_Schema <sup>5</sup>	1	fixed
PDS4_OPS_0700j.xml	Product_XML_Schema <sup>5</sup>	1	fixed <sup>6</sup>
PDS4_OPS_0700j.xsd	_	1	fixed <sup>6</sup>
PDS4_PDS_0700j.xml	Product_XML_Schema <sup>6</sup>	1	fixed <sup>6</sup>
PDS4_PDS_0700j.xsd	_	1	fixed <sup>6</sup>
PDS4_PDS_0700j.sch	_	1	fixed <sup>6</sup>
PDS4_PDS_0700j_sch_label.xml	Product_XML_Schema <sup>5</sup>	1	fixed <sup>6</sup>
mission_dictionary.xml	Product_XML_Schema <sup>5</sup>	1	not fixed
mission_dictionary.xsd	-	1	not fixed
node_dictionary.xml	Product_XML_Schema <sup>5</sup>	1	not fixed
node_dictionary.xsd	_	1	not fixed
specific_product.sch	_	1	not fixed
specific_product.xml	Product_XML_Schema <sup>5</sup>	1	not fixed
5	:	:	:

<sup>5</sup>This class is defined in the PDS4\_OPS\_0700j.xsd file.

<sup>6</sup>The name of this file will vary depending on the version of the information specification used by the data preparer; however, the file, as received from the PDS, should not be renamed.

There is one XML schema collection per archive. A schema collection will typically include both *primary* and *secondary* members.

Since the PDS-wide schema files are registered as part of a PDS system collection, these files are included here as *secondary* members of this collection.

The existence of both primary and secondary members necessitates the inclusion of multiple inventory tables, one each for the primary and secondary products.

## **Chapter 3**

## Labels

PDS product labels are required for describing the contents and format of each individual product within an archive. Specifically, the labels contain the *description objects* that describe corresponding *data objects*. (See chapter **??** for a more detailed explanation.) These description objects are populated using a standard set of classes, attributes, and standard values. These classes, attributes, and standard values are defined in the Planetary Science Data Dictionary (PSDD) (PDS, 2011a).

PDS product labels have a general structure, shown in Figure 3.1, that is used for the vast majority of products. The following sections, organized in accordance with this structure, provide general descriptions of the classes used in PDS labels, plus details about variations seen in specific types of products. Additionally, appendices A through C of this document provide detailed descriptions of the data object classes, a complete listing of their attributes and associations, and examples of XML label snippets to demonstrate how the classes are used in labeling PDS products. (Note: not all appendices completed yet.)

Under the PDS4 standard, all product labels are detached from the data files they describe. Label files must end with the file extension ".xml". There is one label for every product. Each label may describe one or more data files.

XML Decla	ration and Schema Reference
Product Ob	oservational
Identifica	tion Area
Alias	List
Citati	on Information
Modi	fication History
Observat	ion Area
Time	Coordinates
Prima	ry Result Description
Invest	tigation Area
Obse	rving System
Targe	t Identification
Geom	netry
Carto	graphy
Missie	on Area
Node	Area
Referenc	e List
Interr	nal Reference
Exter	nal Reference
File Area	Observational
File	
Digita	l Object Class(es)
L	

Figure 3.1: Generic PDS label structure

xsi:schemaLocation="http://pds.nasa.gov/schema/pds4/pds Product\_Array\_2D\_Image\_0300e.xsd <Product\_Array\_2D\_Image xmlns="http://pds.nasa.gov/schema/pds4/pds"</pre> xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" <?xml version="1.0" encoding="UTF-8"?>

# Figure 3.2: The XML Declaration and Schema Reference

^

<Identification\_Area>

<logical\_identifier>urn:nasa:pds:mpfl-m-imp-raw:data:1246943630-r-0074051101</logical\_identifier> <version\_id>2.0</version\_id>

cproduct\_Class>Product\_Array\_2D\_Image</product\_class>

<title>Filter 5 in 4 tiers - fourth quad monster pan</title>

<alternate\_id>IMP\_EDR-1246943630-REGULAR-0074051101</alternate\_id>

<last\_modification\_date\_time>1998-07-14T00:36:08.000Z</last\_modification\_date\_time>

<Subject\_Area>

<target\_name>MARS</target\_name>

<data\_set\_name>MPFL-M-IMP-2-EDR-V1.0</data\_set\_name>

<instrument\_name>IMAGER FOR MARS PATHFINDER</instrument\_name>

<instrument\_host\_name>MARS PATHFINDER LANDER</instrument\_host\_name>

VIIIVESULYALLUI\_IIAIIIE/IMAKA FAIAFINDEN// IIIVESUJ

</Subject\_Area>

</Identification\_Area>

# Figure 3.3: The Identification\_Area

#### 3.1 The XML Declaration and Schema Reference

As stated earlier in this document, the PDS4 data model is expressed in XML. In order for a PDS label to adequately meet the XML standard, it must be both "well formed" and "valid". A well formed label must have correct XML syntax; a valid label must conform to the rules of an XML schema document (XSD). XSDs provide the rules governing the content of a specific XML document class; they are provided by the PDS and may only be modified through extensions to the classes and with the approval of a PDS discipline node.

The first few lines of each label (see Figure 3.2) include an XML declaration statement and a reference to the schema with which the label complies.

The first line is the XML declaration. It indicates that this is an XML document, that it adheres to version 1.0 of the XML standard, and that it is encoded using the UTF-8 character set.

The following lines identify the PDS namespace, indicate the standard with which the schema complies, and provide the name of the relevant schema document.

#### 3.2 The Identification Area

The purpose of the Identification Area in a PDS label is to provide the unique identifier for the product the label describes. Since this identifier is used to track the product in the PDS registry, every PDS product must have an Identification Area.

The two most critical attributes in the Identification Area are the logical\_identifier and the version\_id. Together these constitute the product's LIDVID, an identifier for this product that is unique in the world. The LIDVID is used to ingest the product into the PDS registry and is used by other products to provide a reference to this product. For example, a browse version of this image would indicate its full resolution source image by providing the LIDVID of the source product. (For details on how to construct LIDVIDs and other identifiers, consult sections 6.1 and 6.2 of this document.)

The product\_class attribute provides the name of the product class used to describe the product. This should be the same as the name of the reference schema describing this product that was identified in the top few lines of the label. This information is used by the PDS registry to assist in product tracking and reporting.

The title attribute is a name for the product. It is a simple text string, with no specific format requirements. It is not necessary for the title to be unique for each product.

#### 3.3. THE OBSERVATION AREA

These four required attributes constitute the core of the Identification Area. Different types of products utilize different Identification\_Area subclasses, which may have additional requirements beyond that of the generic Identification Area. Table 3.1 provides a complete list of Identification\_Area attributes and indicates which of these are restricted in the various subclasses.

#### **3.3** The Observation Area

The "Observation\_Area" of the label is the area where the observation parameters are listed. The top portion of this area includes a relatively small set of attributes that common to the entire PDS. These are attributes that are deemed to be widely enough used that it makes sense for them to have common definitions across all PDS disciplines. More specific classes and attributes are located in the "Mission\_Area" and "Node\_Area" (see below).

```
<Observation Area>
  <comment>comment</comment>
  <start_date_time>1997-07-07T05:13:42.763Z</start_date_time>
  <stop_date_time>not applicable</stop_date_time>
  <local_true_solar_time>13:39:12</local_true_solar_time>
  <mission_phase_name>token</mission_phase_name>
  <planet day number>3</planet day number>
  <spacecraft_clock_cnt_partition>0</spacecraft_clock_cnt_partition>
  <spacecraft_clock_start_count>1246943630</spacecraft_clock_start_count>
  <Mission_Area>
  . . .
  </Mission_Area>
  <Node_Area>
  . . .
  </Node_Area>
</Observation_Area>
```

#### 3.3.1 The Mission Area

The "Mission\_Area" of the label provides the container for all mission-specific classes and attributes. These classes and attributes are defined in a local data dictionary (see section 3.7), and must be prefixed with the namespace identifier applicable to that local dictionary.

```
<Mission_Area>
  <mpf:application_packet_id>34</mpf:application_packet_id>
  <mpf:application_packet_name>SCI_IMG_3</mpf:application_packet_name>
  <mpf:auto_exposure_data_cut>3000</mpf:auto_exposure_data_cut>
  <mpf:auto_exposure_pixel_fraction>1.0000</mpf:auto_exposure_pixel_fraction>
  <mpf:frame_id>BOTH</mpf:frame_id>
```

Attribute or Association	Definition	Cardinality	Identification_Area_Bundle	Identification_Area_Collection	Identification Area Document	Identification Area Manifest	Identification_Area_Product	Identification_Area_System
logical_identifier	A logical identifier identifies the set of all versions of an object. It is an object iden- tifier without a version.	1						
version_id	The version id attribute gives the version.	1						
product_class	The product_class attribute identi- fies the generic class of the prod- uct_Table_Character would have prod- uct_class=Product_Table_Character.	1						R
title	The name given to the resource. Typi- cally, a Title will be a name by which the resource is formally known Dublin Core - The title is used to refer to an ob- ject in a version independent manner.	1						
alternate_title	The alternate title attribute provides one or more alternate names for a product.	0*						
alternate_id	The alternate id attribute is an additional identifier supplied by the data provider. This identifier has no role in any system function.	0*						
last_modification_date_time	The last modification date time attribute gives the most recent date and time that a change was made.	01						
product_subclass	The product_subclass attribute provides the name of a subclass under a prod- uct_class. For example, User_Manual is a subclass of Product_Document.	01			R			
contains_primary_member	The contains_primary_member attribute indicates whether a collection contains products that are primary members of the collection.	-		R				
home	The home attribute indicates where an object resides. It provides sufficient information to be able to access the object.	-						R
subject_area	The subject_area association is a relation- ship to Subject_Area.	01			R		R	

</Mission\_Area>

#### 3.3.2 The Node Area

The "Node\_Area" of the label provides the container for all discipline-specific classes and attributes. These are the classes and attributes that are defined in various PDS node-level local data dictionaries (see section 3.7); they must be prefixed with the relevant node's namespace identifier.

```
<Node_Area>
<img:Camera_Parameters>
<img:exposure_duration>46.0</img:exposure_duration>
<img:exposure_type>AUTO</img:exposure_type>
<img:filter_name>L670_R670</img:filter_name>
<img:filter_number>5</img:filter_number>
</img:Camera_Parameters>
</Node_Area>
```

Note that it is possible to utilize classes and attributes pulled from multiple node dictionaries. In this case, a separate Node\_Area would be used for each node's elements.

Schemas and dictionaries for node level classes and attributes are currently only available in the Information Model Specification and in the http://pds.nasa.gov/schema/pds4/generic/[node] directories. They may be included as an appendix in a future version of this document.

#### 3.4 The Reference List

#### 3.5 The File Area

The "File\_Area" of a label is used to describe the system files containing the digital objects described in the "Data\_Area". It must contain a distinct File class for each file containing data for this product.

Each File class must be described by a local\_identifier, unique within the product label. This identifier will be used in the Data\_Location class (described below) to tie together a Digital Object class with the digital data it describes. Local\_identifiers may be re-used from one label to another within a collection.

```
<File_Area_Observational>
  <File>
    <local identifier>FILE</local identifier>
    <creation_date_time>1998-07-14T00:36:08.000Z</creation_date_time>
    <file_name>i943630r.img</file_name>
    <file_size>138240</file_size>
    <max_record_bytes>512</max_record_bytes>
    <md5_checksum>fa1db0cfb1cea71e438ab791a6ee766d</md5_checksum>
    <records>270</records>
  </File>
  <Array_2D_Image base_class="Array_Base">
    . . .
  </Array_2D_Image>
  <Header>
  </Header>
</File_Area_Observational>
```

#### 3.5.1 The Digital Object Classes

#### **3.6** The Closing Tag

In order to for the XML label to be well formed, it must end with a closing tag for the class opened in the second line of the label (see section 3.1, above).

```
</Product_Array_2D_Image>
```

#### 3.7 Local Data Dictionaries

TBD; I wonder if this needs to be an independent chapter. This will include information about the correct format of local data dictionaries and how to reference them in schemas. (Nomenclature rules for classes and attributes are discussed in the chapter on nomenclature.)

# **Chapter 4**

# **Fundamental Data Structures**

There are four fundamental data structures that may be used for archiving data in the PDS. All data products delivered to the PDS must be constructed from one or more of these structures. These four fundamental structures are described using four base classes: Table (used to describe heterogeneous repeating records of scalars), Array (used for homogeneous n-dimensional arrays of scalars), Parsable\_Byte\_Stream, and Encoded\_Byte\_Stream. All other digital object classes in the PDS are derived from one of these four base classes.

#### 4.1 Tables

In the PDS, column data may be stored in either of two different structures, either a fixed-width "table", or a variable-length "spreadsheet" (delimited stream). The latter is described in section **??**, "Unencoded Stream Base".

Conceptually, tabular data files consist of a series of named columns containing both data locations and data values. The data may consist of both numbers and text strings.

The TABLE object is a uniform collection of rows containing American Standard Code for Information Interchange (ASCII) or binary values stored in columns. The INTERCHANGE\_FORMAT keyword is used to distinguish between TABLEs containing only ASCII columns and those containing binary data. The rows and columns of the TABLE object provide a natural correspondence to the records and fields often defined in interface specifications for existing data products. Each field is defined as a fixed-width COLUMN object; the value of the COLUMNS keyword is the total number of COLUMN objects defined in the label. All TABLE objects must have fixed-width records.

#### CHAPTER 4. FUNDAMENTAL DATA STRUCTURES

▼ e Table\_Base

e local\_identifier

e comment e fields

- e file\_type
- e name
- e records
- e record\_bytes
- E Data\_Location
- ▼ e Table\_Record
  - Table\_Field
    - e field\_name
    - e field\_number
    - e field\_data\_type
    - e field location
    - e field\_length
      - ineiu\_iengui
    - e field\_format
    - e field\_min\_physical e field\_max\_physical
    - e field\_min\_logical
    - e field\_max\_logical
    - e field\_scaling\_factor
    - e field\_value\_offset
    - e field\_unit
    - e field\_description
  - e Table\_Field

e Table\_Field

Figure 4.1: Table\_Base

Physically, the data are stored as a sequence of repeating records where each record is terminated by both the CR and LF characters (ASCII characters xxx and yyy, respectively). Since both the column lengths and the record lengths are fixed, column values are identifiable by position alone. However, column delimiters may optionally be included.

The data may be represented in any of binary, ASCII, or Unicode Transformation Format (UTF)-8 values.

(include picture here)

#### 4.2 Arrays

The second of the four basic structures consists solely of homogeneous pixels in fixed-length arrays in any number of dimensions, although two- and three-dimensional data are the most common. These arrays are described using a subclass of the Array class, which has two associated classes (besides the Data\_Location class), the Array\_Axis and Array\_Element classes.

The structure of the homogeneous pixels or "elements" in an array is described using the Array\_Element class. The amount of physical storage space required for each element is describe by the element\_bytes attribute. The storage order and interpretation of the bytes comprising each element is indicated by the element\_type attribute, which typically has values like "SignedMSB2" or "IEEE754Double". (See the Planetary Science Data Dictionary for a complete listing of valid data types.)

The physical interpretation of the element values is described using the remaining three attributes. The element\_unit attribute describes the ...??? The element\_scaling\_factor and element\_offset\_value attributes

provide the numbers by which an element value must be transformed, using the following formula:

#### 4.2. ARRAYS

#### true value = (stored value x scaling factor) + offset value


The characteristics of each array axis are modeled using an Array\_Axis class (there must be one Array\_Axis class present in the label for each dimension of the array). The axis\_length attribute provides the number of elements in the array along each particular axis. The axis\_name attribute unambiguously labels each axis, and may have a value as simple as "line", "sample", or "spectral band". (Axis\_unit and axis\_scale\_type still have significant problems.)

Finally, the Array class, or one of its subclasses, wraps the whole thing together:

The axis\_index\_order attribute specifies the order in which the elements of the multi-dimensional array are stored. The PDS requires that the data be stored in a fastest-varying-pixel-first order. In other words, for the following conceptual representation of a 3-dimensional array:

```
samples
```



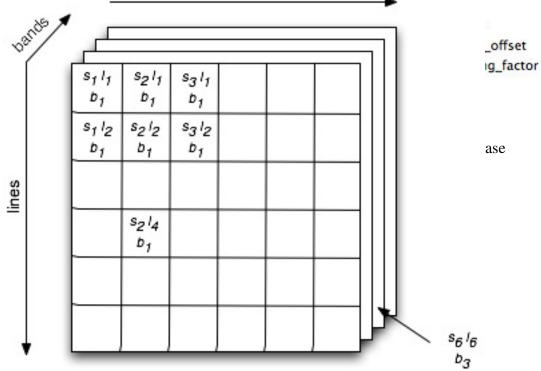

the data stream must contain the pixels in the following order:

 $s_1 l_1 b_1, s_2 l_1 b_1, s_3 l_1 b_1 \dots s_1 l_2 b_1, s_2 l_2 b_1, s_3 l_2 b_1 \dots s_1 l_1 b_2, s_2 l_1 b_2, s_3 l_1 b_2 \dots$ 

This ordering of the elements is indicated by specifying an axes\_order of "FIRST\_INDEX\_FASTEST". (I am not convinced that we have yet completely resolved the issue of tying together the axis order with the named Array\_Axis classes. – EDR)

#### 4.3 Parsable Byte Stream

XML / HTML / spreadsheet xhtml text files telemetry stream format files - conceivably

Alternatively, data may be stored in a variable-length structure. The PDS refers to these structures as "spread-sheets".

#### 4.4 Encoded Byte Stream

The encoded byte stream structure in the PDS is a byte stream that may only be interpreted after it has been "decoded", according to some well known standard. "Encoded" data may include data that has been compressed and needs to be decompressed before interpretation. Alternatively, it may include data encoded in some form of binary format, such as the PDF.

In order to interpret an encoded byte stream, reading software would need to determine the value of the external\_standard\_id attribute and access the referenced standard for information on how to parse the byte stream. It is PDS policy that only publicly available, open source, widely accepted standards may be used for the encoding of data within the PDS.

# **Chapter 5**

# **Data Storage Types**

# 5.1 Character Data Types

Character data types are used to classify attributes in class descriptions (i.e., in product labels) and to describe the data formats of fields in character tables.

# 5.1.1 Boolean Types

Value	Description	Values	
ASCII_Boolean_TF	True / False indicator	T or $F^1$ . Limit 1 character.	

<sup>1</sup>Are other boolean values permitted? – EDR

## 5.1.2 Date and Time Types

Value	Description	Values	
ASCII_Date <sup>1</sup>	A date string in either Day	Date value in either of the fol-	
	Of Year (DOY) or Year	lowing two forms: yyyy-doy	
	Month Day (YMD) format.	yyyy-mm-dd.	
ASCII_Date_DOY	A date string in DOY format.	Date value of the form:	
		уууу-doy.	

<sup>1</sup>Note: this data\_type is not currently in the information model; it is being considered for adoption. – EDR  $^{2}$ Has been deleted from model – why? – EDR

Value	Description	Values
ASCII_Date_YMD	A date string in YMD for-	Date value of the form:
	mat.	yyyy-mm-dd.
ASCII_Date_Time <sup>2</sup>	A date/time string where the	Date/time value in either of
	date may be in either DOY	the following two forms:
	or YMD format.	yyyy-doyThh:mm:ss[.fff]
		<pre>yyyy-mm-ddThh:mm:ss[.fff].</pre>
		If Coordinated Universal Time
		(UTC), Z should be appended.
ASCII_Date_Time_DOY	A date/time string where the	Date/time value of the form:
	date is in DOY format.	<pre>yyyy-doyThh:mm:ss[.fff].</pre>
		If UTC, Z should be appended.
ASCII_Date_Time_YMD	A date/time string where the	Date/time value of the form:
	date is in YMD format.	<pre>yyyy-mm-ddThh:mm:ss[.fff].</pre>
		If UTC, Z should be appended.
ASCII_Time	An ASCII time string. May	ASCII string of the form:
	be used for local times.	hh:mm:ss[.fff]. If UTC, Z
		should be appended.

<sup>1</sup>Note: this data\_type is not currently in the information model; it is being considered for adoption. - EDR <sup>2</sup>Has been deleted from model - why? - EDR

# 5.1.3 Numeric Types

Value	Description	Values
ASCII_Integer	An ASCII character repre-	ASCII string consisting of the
	sentation of a decimal inte-	characters 0 through 9, plus the
	ger.	negative sign "-".
ASCII_Mask <sup>1</sup>	An ASCII representation, in	Limit 255 characters.
	binary, octal, or hexadecimal	
	notation, of a bit mask.	
ASCII_MD5_Checksum	A 128-bit hash value calcu-	An ASCII string consisting of
	lated using the MD5 algo-	the characters 0 through 9 and
	rithm.	A through F. Must be exactly 32
		characters in length.

<sup>1</sup>As currently defined, there appears to be no difference between ASCII\_Mask and ASCII\_Numeric\_Base2 / ASCII\_Numeric\_Base16. Should it be redefined to become the catch-all for all ASCII representations of binary, octal, and hexadecimal numbers? – EDR

<sup>2</sup>Note that version 0.3.0.0.e of the Information Model incorrectly set the maximum value of this data\_type to 2147483647; it has since been corrected. - EDR

<sup>3</sup>Note: this data\_type is not currently in the information model; it is being considered for adoption. – EDR

#### 5.1. CHARACTER DATA TYPES

Value	Description	Values
ASCII_NonNegative_Integer	An ASCII character repre-	ASCII number in the range 0 to
	sentation of a decimal inte-	4294967295. <sup>2</sup>
	ger greater than or equal to	
	zero.	
ASCII_Numeric_Base2	An ASCII representation of	An ASCII string consisting of
	a number in binary format.	the characters 0 and 1.
ASCII_Numeric_Base8 <sup>3</sup>	An ASCII representation of	An ASCII string consisting of
	a number in octal format.	the characters 0 through 7.
ASCII_Numeric_Base16	An ASCII representation of	An ASCII string consisting of
	a number in hexadecimal	the characters 0 through 9 and
	format.	A through F.
ASCII_Real	An ASCII character repre-	ASCII number in the range of
	sentation of a real number.	negative infinity to positive in-
		finity.

<sup>1</sup>As currently defined, there appears to be no difference between ASCII\_Mask and ASCII\_Numeric\_Base2 / ASCII\_Numeric\_Base16. Should it be redefined to become the catch-all for all ASCII representations of binary, octal, and hexadecimal numbers? – EDR

<sup>2</sup>Note that version 0.3.0.0.e of the Information Model incorrectly set the maximum value of this data\_type to 2147483647; it has since been corrected. – EDR

<sup>3</sup>Note: this data\_type is not currently in the information model; it is being considered for adoption. – EDR

# 5.1.4 String Types

Value	Description Values	
ASCII_AnyURI	A URI or its subclasses	An ASCII string in URI format.
	URN and URL (See section	Limit 255 characters.
	6.2.4 for details.)	
ASCII_DOI	A Digital Object Identifier	ASCII string of the form:
	(DOI). (See section 6.2.3 for	nn.nnnn/nnn Limit 255
	details.)	characters.
ASCII_Identifier	A PDS identifier. (See sec- ASCII string beginning	
	tion 6.1 for details.) alphabetic character. Limit	
		characters.
ASCII_LID	A PDS logical identifier. An ASCII string of the	
	(See section 6.1.1 for de-	URN:NASA:PDS:xxxx Limit 255
	tails.)	characters.

<sup>1</sup>Please note that a UTF-8 character string close to 255 *characters* in length may exceed 255 *bytes* in length.

Value	Description	Values
ASCII_LIDVID	A PDS versioned identifier	An ASCII string of the form
	(logical identifier plus ver-	URN:NASA:PDS:xxxx::M.n.
	sion id). (See section 6.1.1	Limit 255 characters.
	for details.)	
ASCII_VID	A PDS version id. (See sec-	An ASCII string of the form
	tion 6.2.1 for details.)	M.m, where $M$ and $m$ are both in-
		tegers.
ASCII_Directory_Path_Name	A system directory path in	ASCII string of the form:
	UNIX format.	dir1/dir2/Limit 255 char-
		acters.
ASCII_File_Name	A system file name. (See	ASCII string of the form:
	section 6.4 for details.)	file_name.file_ext Limit
		255 characters.
ASCII_File_Specification_Name	A system file including di-	ASCII string of the form:
	rectory path, file name, and	dir1/dir2/file_name.ext
	file extension in UNIX for-	Limit 255 characters.
A SCH. Shart String Callenged	mat.	An ACCH string Lineit 255
ASCII_Short_String_Collapsed	An ASCII-encoded text	An ASCII string. Limit 255 characters.
	string of limited length with whitespace collapsed. (I.e.	characters.
	multiple spaces, new lines,	
	tabs, and carriage returns are	
	not significant.)	
ASCII_Short_String_Preserved	An ASCII-encoded text	An ASCII string. Limit 255
	string of limited length with	characters.
	whitespace preserved. (I.e.	
	multiple spaces, new lines,	
	tabs, and carriage returns are	
	significant.)	
ASCII_Text_Preserved	An ASCII-encoded text	An ASCII string.
	string of unlimited length	
	with whitespace preserved.	
UTF8_Short_String_Collapsed	A UTF-8 encoded text	A UTF-8 string. Limit 255
	string of limited length with	characters. <sup>1</sup>
	whitespace collapsed.	
UTF8_Short_String_Preserved	A UTF8-encoded text string	A UTF-8 string. Limit 255
	of limited length with	characters. <sup>1</sup>
	whitespace preserved.	

<sup>1</sup>Please note that a UTF-8 character string close to 255 *characters* in length may exceed 255 *bytes* in length.

40

#### 5.2. BINARY DATA TYPES

Value	Description	Values
UTF8_Text_Preserved	A UTF8-encoded text string of unlimited length with whitespace preserved.	A UTF-8 string.

<sup>1</sup>Please note that a UTF-8 character string close to 255 *characters* in length may exceed 255 *bytes* in length.

# 5.2 Binary Data Types

Binary data types are used to describe data formats of fields in binary tables and array element formats in arrays.

## 5.2.1 Integers

### 5.2.1.1 Signed LSB Integers

This section describes signed integers stored in Least Significant Byte (LSB) first (also known as *little-endian*) order. In this section the following definitions apply:

- b0-b7 Arrangement of bytes as they appear when reading a file (e.g., read byte b0 first, then b1, b2 and b3, up through b7)
- *i-sign* Integer sign bit bit 7 in the highest order byte
- i0 i7 Arrangement of bytes in the integer, from lowest order to highest order. The bits within each byte are interpreted from right to left (e.g., lowest value = bit 0, highest value = bit 7), in the following way:

### 8-byte integers:


In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-7 represent  $2^{24}$  through  $2^{31}$ In i4, bits 0-7 represent  $2^{32}$  through  $2^{39}$ In i5, bits 0-7 represent  $2^{40}$  through  $2^{47}$ In i6, bits 0-7 represent  $2^{48}$  through  $2^{55}$ In i7, bits 0-6 represent  $2^{56}$  through  $2^{62}$ 

4-byte integers:


- In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-6 represent  $2^{24}$  through  $2^{30}$
- 2-byte integers:
  In i0, bits 0-7 represent 2<sup>0</sup> through 2<sup>7</sup>
  In i1, bits 0-6 represent 2<sup>8</sup> through 2<sup>14</sup>

All negative values are represented in two's complement.


## SignedLSB8



SignedLSB4

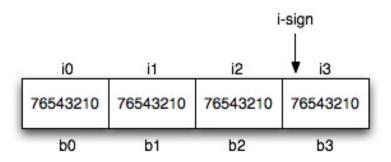

### SignedLSB2



#### 5.2. BINARY DATA TYPES

#### 5.2.1.2 Unsigned LSB Integers

This section describes unsigned integers stored in LSB format. In this section the following definitions apply:

- b0-b3 Arrangement of bytes as they appear when reading a file (e.g., read byte b0 first, then b1, b2 and b3)
- i0-i3 Arrangement of bytes in the integer, from lowest order to highest order. The bits within each byte are interpreted from right to left (e.g., lowest value = bit 0, highest value = bit 7), in the following way:

4-byte integers:

In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-7 represent  $2^{24}$  through  $2^{31}$ 

2-byte integers: In i0, bits 0-7 represent 2<sup>0</sup> through 2<sup>7</sup> In i1, bits 0-7 represent 2<sup>8</sup> through 2<sup>15</sup>


1-byte integers: In i0, bits 0-7 represent 2<sup>0</sup> through 2<sup>7</sup>

#### **UnsignedLSB4**

iO	i1	i2	i3
76543210	76543210	76543210	76543210
b0	b1	b2	b3

#### UnsignedLSB2

#### **Unsigned Byte**



#### 5.2.1.3 Signed MSB Integers

This section describes the signed integers stored in Most Significant Byte (MSB) first (also known as *big-endian*) order. In this section the following definitions apply:


- b0-b7 Arrangement of bytes as they appear when read from a file (e.g., read b0 first, then b1, b2, and b3 up through b7)
- *i-sign* Integer sign bit bit 7 in the highest order byte
- i0 i7 Arrangement of bytes in the integer, from lowest order to highest order. The bits within each byte are interpreted from right to left (e.g., lowest value = bit 0, highest value = bit 7) in the following way:


#### 8-byte integers:

- In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-7 represent  $2^{24}$  through  $2^{31}$ In i4, bits 0-7 represent  $2^{32}$  through  $2^{39}$ In i5, bits 0-7 represent  $2^{40}$  through  $2^{47}$ In i6, bits 0-7 represent  $2^{48}$  through  $2^{55}$ In i7, bits 0-6 represent  $2^{56}$  through  $2^{62}$
- 4-byte integers:
  - In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-6 represent  $2^{24}$  through  $2^{30}$
- 2-byte integers:
  - In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-6 represent  $2^8$  through  $2^{14}$


#### SignedMSB8

SignedMSB4



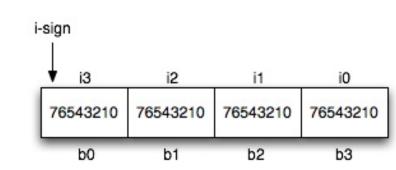

SignedMSB2



### 5.2.1.4 Unsigned MSB Integers

This section describes unsigned integers stored in MSB format. In this section the following definitions apply:

b0-b3 Arrangement of bytes as they appear when read from a file (e.g., read b0 first, then b1, b2, and b3)

i0 - i3 Arrangement of bytes in the integer, from lowest order to highest order. The bits within each byte are interpreted from right to left (e.g., lowest value = bit 0, highest value = bit 7) in the following way:

#### 4-byte integers:

In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ In i2, bits 0-7 represent  $2^{16}$  through  $2^{23}$ In i3, bits 0-7 represent  $2^{24}$  through  $2^{31}$ 

## 2-byte integers:

In i0, bits 0-7 represent  $2^0$  through  $2^7$ In i1, bits 0-7 represent  $2^8$  through  $2^{15}$ 

#### 1-byte integers:

In i0, bits 0-7 represent  $2^0$  through  $2^7$ 


#### **UnsignedMSB4**

i3	i2	i1	iO
76543210	76543210	76543210	76543210
b0	b1	b2	b3

## UnsignedMSB2

i1	iO	
76543210	76543210	
b0	b1	

## UnsignedByte



## 5.2.2 Reals

This section describes the internal format of IEEE-format floating-point numbers. In this section the following definitions apply:

- b0-b9 Arrangement of bytes as they appear when read from a file (e.g., read b0 first, then b1, b2, b3, etc.)
- *m-sign* Mantissa sign bit
- *int-bit* In 10-byte real format only, the integer part of the mantissa, assumed to be "1" in other formats, is explicitly indicated by this bit
- e0-e1 Arrangement of the portions of the bytes that make up the exponent, from lowest order to highest order. The bits within each byte are interpreted from right to left (e.g., lowest value = rightmost bit in the exponent part of the byte, highest value = leftmost bit in the exponent part of the byte) in the following way:

8-bytes (double precision):
In e0, bits 4-7 represent 2<sup>0</sup> through 2<sup>3</sup>
In e1, bits 0-6 represent 2<sup>4</sup> through 2<sup>10</sup>

Exponent bias = 1023

4-bytes (single precision): In e0, bit 7 represents 2<sup>0</sup>
In e1, bits 0-6 represent 2<sup>1</sup> through 2<sup>7</sup>

Exponent bias = 127

m0-m7 Arrangement of the portions of the bytes that make up the mantissa, from highest order fractions to the lowest order fraction. The order of the bits within each byte progresses from left to right, with each bit representing a fractional power of two, in the following way:

8-bytes (double precision):

In m0, bits 3-0 represent  $1/2^1$  through  $1/2^4$ In m1, bits 7-0 represent  $1/2^5$  through  $1/2^{12}$ In m2, bits 7-0 represent  $1/2^{13}$  through  $1/2^{20}$ In m3, bits 7-0 represent  $1/2^{21}$  through  $1/2^{28}$ In m4, bits 7-0 represent  $1/2^{29}$  through  $1/2^{36}$  In m5, bits 7-0 represent  $1/2^{37}$  through  $1/2^{44}$ In m6, bits 7-0 represent  $1/2^{45}$  through  $1/2^{52}$ 


4-bytes (single precision): In m0, bits 6-0 represent 1/2<sup>1</sup> through 1/2<sup>7</sup> In m1, bits 7-0 represent 1/2<sup>8</sup> through 1/2<sup>15</sup> In m2, bits 7-0 represent 1/2<sup>16</sup> through 1/2<sup>23</sup>

The following representations all follow this format:


1.mantissa x  $2^{(exponent-bias)}$ 

Note that the integer part ("1.") is implicit in all formats as described above. In all cases the exponent is stored as an unsigned, biased integer (that is, the stored exponent value - bias value = true exponent).

#### IEEE754Double




IEEE754Single

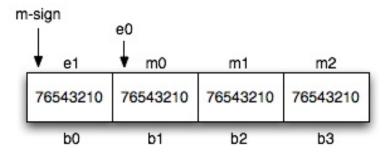


## 5.2.3 Complex

IEEE complex numbers consist of two IEEE\_REAL format numbers of the same precision, contiguous in memory. The first number represents the real part and the second the imaginary part of the complex value.

#### ComplexB16

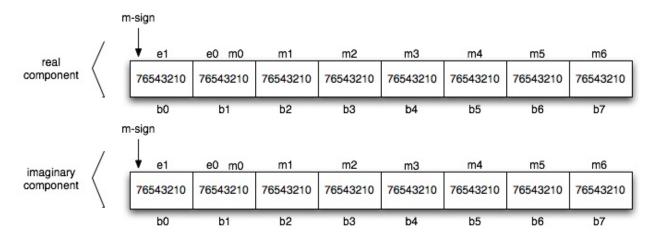

### ComplexB8

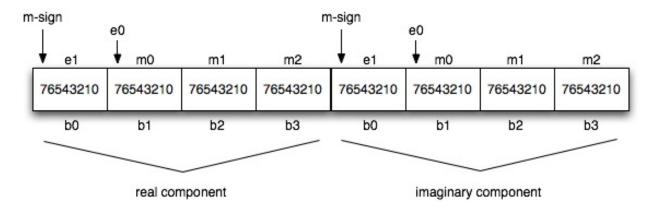

# 5.2.4 Boolean

This binary data type is listed in the Information Model Specification, but is, as yet, insufficiently defined there to describe here. – EDR

# 5.3 Multi-Valued Data Types

Where do these definitions belong? This section is basically a placeholder until I come up with a better idea. – EDR.

# 5.3.1 Vectors

## 5.3.2 Quaternions

A quaternion is a four-component representation of a rotation matrix. This particular definition is focused on the PDS use of quaternions; one should refer to other sources for a more complete discourse on quaternion math.

A quaternion may be used to specify the rotation of one Cartesian reference frame-sometimes referred to as the base frame or the 'From' frame-into coincidence with a second Cartesian reference frame-sometimes referred to as the target reference frame or the 'To' frame. Unlike an Euler rotation where three sequential rotations about primary axes are used, a quaternion rotation is a single action, specified by a Cartesian vector used as the positive axis of the rotation (right hand rule) and the magnitude (an angle) of rotation about that axis.

The quaternion may be thought of as defining the instantaneous orientation–sometimes called 'pointing'–of a structure such as an instrument, antenna, solar array or spacecraft bus, given relative to a specified reference frame (the base frame), at an epoch of interest.

Perhaps of more use is the concept that a quaternion may be used to rotate an arbitrary Cartesian 3-vector defined in one reference frame (e.g. an instrument's reference frame) to an equivalent vector defined in another reference frame (e.g. the frame tied to a spacecraft or the J2000 inertial reference frame).

A quaternion has four components. One of the components is a scalar, a function of the angle of rotation (cosine of half the rotation angle), while the remaining three components are used to specify a vector, given in the base reference frame, about which the rotation will be made. In the PDS context a quaternion has a magnitude of one, and so may be treated as a unit quaternion.

In many cases a time tag (epoch) must be associated with the quaternion because the orientation varies over time. A time tag is not needed if the 'To' and 'From' frames have a fixed offset.

The QUATERNION\_DESC element is always to be paired with the QUATERNION element, and will contain a complete description of the formation and rotational sense of the quaternion specified with the QUATERNION keyword, and the structure (organization of the four components) of the quaternion.

In the lingo of the NASA 'SPICE' ancillary information system a rotation matrix is synonymous with a C-matrix-that which may be obtained from a C-kernel. The SPICE Toolkit provides an assortment of routines that deal with quaternions. The SPICE system also provides information about specification of reference frames and time tags suitable for use with quaternions in the SPICE context. The NAIF Node of the PDS can provide additional documentation on quaternions in a

50

spacecraft ancillary data context ('Rotations Required Reading' and 'SPICE Quaternion White Paper').

CHAPTER 5. DATA STORAGE TYPES

# Chapter 6

# **Nomenclature Rules**

Make sure to specify permitted character sets!

# 6.1 Identifiers

## 6.1.1 Logical Identifiers vs. Versioned Identifiers

Each version of each product in the PDS has an identifier which is unique in the world. In the PDS, we refer to this as a *versioned identifier* or *lidvid*.

This identifier, minus the version information, is referred to as a *logical identifier* or *lid*. The logical identifier is used to denote all versions of a product collectively.

lidvid = lid "::" version id

Versioned

length limit on versioned identifiers is 255 characters; there is no specific limit on any individual component of these, but missions must plan well in advance to leave enough characters for the longest LIDVID (the product LIDVID), INCLUDING ALLOWING FOR HIGH LEVEL VER-SION IDs!

stay well under the limit in order to accommodate the inevitable and unanticipated changes that will come down the road (higher sol numbers than expected due to extended missions, higher version ids

# 6.1.2 Product Identifiers

Product identifiers are used to register PDS products and must be globally unique.

product logical identifier (lid) = <collection logical identifier> ":" <specific identifier> product versioned identifier (lidvid) = <product logical identifier> "::" <product version id>

specific identifier = a string, determined by the data provider, that is unique within the collection

Many data providers choose to use the file name for specific identifier. In this case, it shall consist only of the file name base of the label file (i.e., without the file name extension). If the file name base is not unique within the collection, information (such as the relative directory path) shall be pre-pended to it to make it unique.

### **Rules:**

- Must be unique across the PDS.
- (character set is same as for file names)

# 6.1.3 Collection Identifiers

collection logical identifier (lid) = <buddle logical identifier> ":" <specific identifier> collection versioned identifier (lidvid) = <collection logical id> "::" <collection version id>

specific identifier = <mission abbrev.> "\_" <inst abbrev.> "\_" <collection type>
 ["\_" <processing level or collection subtype>]
 ["\_" <target or target system or target type>]
 ["\_" <description>]

Note that the above can't work. The collection type component needs to be last, and separated from the rest by a colon, example urn:nasa:pds:mpf\_imp\_raw\_mars:context or urn:nasa:pds:mpf\_imp\_raw\_mars:data. I wonder if target-mission-inst-processing level might work best

Mission abbreviation examples: (May also be the abbreviation for a spacecraft, telescope, observing campaign, or investigation)

CLEM GLL MGS SL9

#### 54

#### 6.1. IDENTIFIERS

Instrument abbreviation examples:

MOC NIMS UVVIS

Collection types:

BROWSE CALIBRATION CONTEXT (for context products delivered as part of non-context bundles) DATA DOCUMENT GEOMETRY (for non-SPICE geometry data) INSTRUMENT INSTRUMENT INSTRUMENT / OBSERVING\_SYSTEM MISSION / INVESTIGATION / CAMPAIGN NODE PUBLICATIONS SPICE\_KERNEL (for SPICE products delivered as part of non-SPICE bundles) SUPPLEMENTARY TARGET XML\_SCHEMA

#### **Rules:**

• char set =

## 6.1.4 Bundle Identifiers

bundle logical identifier (lid) = "URN:NASA:PDS:" <specific identifier> bundle versioned identifier (lidvid) = <bundle logical identifier> "::" <bundle version id>

specific identifier = that portion of the collection specific identifier which is common across all the component collections of the bundle

bundle and collection ids must be unique across pds

in general they will be constructed major to minor order

the bundle id will consist of all those terms that are common across component collections

order of discriminating terms is up to data provider in consultation with node

underscores used within terms, dashes used between terms

and = underscore

no forward slashes

LIDs are all uppercase (inside the labels; not enforced if used on file systems) (changed)

use ids rather than names for component terms (like "MGS" rather than "MARS GLOBAL SUR-VEYOR")

# 6.2 Other Identifying Information

## 6.2.1 Version IDs

Version IDs are used for all types of products, including standard products, collections, and bundles.

Note that in all cases, the incrementing of a version identifier implies that a user of that product should use the latest version of the product. In other words, incrementing a version indicates that previous versions of the product have been superseded. (It is, of course, possible that a user may, in specific cases, deliberately choose to use older versions of a product. As long as those products were archived with the PDS, they will still be available, albeit potentially offline.)

#### **Formation Rules:**

- Version identifiers are appended to logical identifiers to form versioned identifiers. They are separated from the logical identifier by a double colon ("::").
- Version IDs must be of the form M.m where "M" and "m" are both integers. "M" is the "major" component of the version and "m" is the "minor" component of the version.
- The major number is initialized to one for archive products. (Zero may be used for sample products or test run products that are not intended for the archive.) The minor number is initialized to zero.
- Whenever the major number is incremented, the minor number is re-set to zero.
- The minor portion of the version is **not** pre-padded with zeros; it is simply incremented as an integer. Thus, "1.1" and "1.10" are different versions; "1.01" is invalid.

#### 6.2. OTHER IDENTIFYING INFORMATION

It is up to the determination of each PDS discipline node, working in consultation with data preparers, to determine the criteria for how and under what circumstances version numbers will be incremented for a particular archive. Specific versioning conventions for every archive must be detailed in the respective product documentation. Note that depending upon the criteria that a given node/mission combination selects, it is possible in some cases that higher versioned products may be created without their lower versioned counterparts existing.

## 6.2.2 Local Identifiers

### Change to "Local IDs"?

Local identifiers are only required to be unique within an individual product label. They are primarily used for navigating among the different portions of the label and can be used, for example, to tie together a data object with an Object\_Statistics class describing it, to to make clear the relationship between two Image\_Grayscale classes (a primary and a browse) and the one or two File classes identifying the data they describe.

The construction of these identifiers is therefore largely up to the data provider, with the exception of the character set restrictions. There is also one recommendation, to make these identifiers simpler for humans to find in a label:

#### **Rules:**

- Must be unique within the containing label.
- The character set for local identifiers is restricted to ASCII letters, number, the underscore, the colon, the dash, and the space. Numeric codes for these ASCII characters to be added. Period? Forward slash? Semi-colon? No space

formation rule: use class name with incrementing number appended, underscore, prepended with zeroes so that all local identifiers of the same class type have the same number of digits (This is to preserve the ability to do alphabetical sorting.)

## 6.2.3 Digital Object Identifiers

TBD - Probably need to add a description of these. - EDR

## 6.2.4 Uniform Resource Identifiers

TBD – Probably need to add a description of these. – EDR

## 6.2.5 Names

TBD - Is this still needed?

**Rules:** 

•

**Recommendations:** 

•

# 6.2.6 Titles and Alternate Titles

Titles and alternate titles are intended for human consumption. Their primary use is to be displayed alongside a product when it is shown in some sort of product browser. It is not required to be unique. The specificity of the title is entirely up to the data provider, and is constrained only the manpower and resources necessary to populate it. Both of the following are acceptable for titles:

"LORRI image of Io; lat: 4 degS, lon: 164 degW; time: 2007-03-01T00:35 UTC"

"This image of Io, captured by New Horizon's Long Range Reconnaissance Imager, captured the active Tvashtar plume. The image was acquired on March 1, 2007."

The first of these two titles could be generated automatically by data production pipeline software. The second required post-production modification to incorporate observed feature information. Either is acceptable.

UTF-8 printable characters (explicitly disallowing roughly 30 ASCII characters non-printable characters)

limit to 255 **bytes** in length (up to data providers to be careful if using UTF-8 to verify byte length) (character type definition?)

### **Rules:**

58

#### 6.3. DIRECTORIES

- Titles must be no more than 255 characters in length.
- Titles are text strings. The character set is restricted to the US-ASCII? character set.

#### **Recommendations:**

• None.

How are alternate titles used?

# 6.3 Directories

Reserved directory names: browse, calibration, context, data, document, geometry, supplemental (or about), xml\_schema

same character set as filenames except no periods

#### **Rules:**

•

#### **Recommendations:**

•

Although NTFS allows each path component (directory or filename) to be 255 characters long and paths up to about 32767 characters long, the Windows kernel only supports paths up to 259 characters long if no UNC is used for addressing. – Need to follow up on this. See the section on "Maximum Path Length Limitation" on the following web page: http://msdn.microsoft.com/en-us/library/aa365247(VS.85).aspx

# 6.4 Filenames

Although modern operating systems are extremely permissive when it comes to filenames, best practices argue against taking full advantage of this. For example, many characters that are legal in filenames require escaping and can create numerous problems when moving files from one operating system to another. Similarly, 255 character filenames, while permitted, are often inconvenient to users who can't distinguish between similarly named lengthy filenames in many views on various operating systems.

Reserved names: AUX, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9, CON, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9, NUL, PRN, (and none of the former with any extension), a.out, core, .profile, .history, and .cshrc

## **Rules:**

- Filenames must be unique within directories.
- Filenames must be no longer than 255 characters (although see path length restrictions discussed in the section on directory names).
- Filenames must be case-insensitive. (In other words, "MyFile.txt" and "myfile.txt" are not permitted in the same directory.)
- The character set is restricted to A-Z (ASCII 0x41 through 0x5A), a-z (ASCII 0x61 through 0x7A), 0-9 (ASCII 0x30 through 0x39), dash "-" (ASCII 0x2D), underscore "\_" (ASCII 0x5F), and period "." (ASCII 0x2E). (we may re-consider this later)
- Filenames may not begin or end with a dash, underscore, or period.
- Filenames must begin with an alphabetical character (A-Z or a-z or 0-9).

### **Recommendations:**

• Don't abuse the permitted 255 character length for filenames. Try to keep them no longer than 30 to 40 characters in general. Archives can fail peer review for being unnecessarily difficult to use as much as for violating actual PDS standards!

### Still have to discuss file extensions.

filenames must have at least one period followed by an extension. They may have more than one period, but PDS will consider all periods other than the final one to be part of the basename. (file base + file extension)

remember all SPICE file extensions need to be reserved

Need to include version information in filenames.

(See: "Naming Files, Paths, and Namespaces" from MSDN and Wikipedia topic "Filename".)

#### 60

6.5. CLASSES

# 6.5 Classes

The following rules and recommendations for the naming of classes in the PDS data model apply to all levels of the model: common, node, and mission.

## **Rules:**

- The character set is restricted to ASCII letters, numbers, and the underscore. The first character of the class name must be a letter.
- Each component of the class name shall begin with an uppercase character; all other characters shall be lowercase, except when the class name incorporates an acronym. (Ex. Stream\_-Delimited\_Field, SPICE\_Kernel, Array\_2D)
- The class name must not exceed 255 characters.
- The word order for the components of the class name shall be most significant first (Ex. Product\_Table\_Character, rather than Character\_Table\_Product).

## **Recommendations:**

- Whenever possible, when creating subclasses of existing classes, use portions of the parent class name in the child class name to make the relationship between the classes apparent. (Ex. Table\_Base, Table\_Base\_Character or Image\_3D, Image\_Color, Image\_Color\_Anaglyph)
- Use widely recognized and accepted terms for class name components, that clearly indicate the nature of a particular class. (Examples to avoid: Image\_PanMos\_Proj\_JMR, Fpu\_Bin\_Table, Comp\_12\_8\_Parm)

Camel Case - MSB (or do what make sense) follows rules for sub-classes

# 6.6 Attributes

**Rules:** 

•

### **Recommendations:**

•

rightmost component must correspond to an existing data element concept no articles

tool that provides pull down list of data element concepts for user to select from,

lower case - LSB

rules for common and node dictionaries but not for mission?

# 6.7 Attribute Values

**Rules:** 

•

enumerated values - case no restrictions, but must match enumerated values (i.e. no limitation on person who created dictionary, but limitation on data preparer is that they must follow DD), UTF-8

#### **Recommendations:**

•

# Part II

# **Data Content Standards**

# **Chapter 7**

# **Calibration Standards**

TBD - This section is targeted for completion in the second half of calendar year 2011.

# **Chapter 8**

# **Cartographic Standards**

# 8.1 Introduction

To facilitate use, exchange and integration of its products, the PDS follows accepted planetary cartographic standards for data products where they exist. Because such standards evolve as new data and knowledge are acquired, there are advisory groups charged with developing and periodically updating standards for coordinate systems. All data providers for PDS products should follow accepted standards and be aware of current National Aeronautics and Space Administration (NASA) and international recommendations on cartographic coordinate systems and conventions relevant to their bodies of interest. An absolute requirement for all PDS products is that relevant coordinate systems and frames be clearly specified in product labels and supporting documents. This chapter specifies, as of early 2011, the authoritative sources for international cartographic standards, provides a summary of major cartographic elements to which those standards apply, and identifies the primary standards that PDS has adopted.

#### 8.1.1 International and NASA Advisory Groups for Cartographic Standards

The primary international body for coordinate systems in the Solar System is the International Astronomical Union (IAU). The IAU has recognized the International Celestial Reference System (ICRS) as the defining inertial reference system and its associated International Celestial Reference Frame (ICRF) (Ma et al., 1998) as the defining frame for that system. The ICRS and ICRF are maintained for the IAU by the International Earth Rotation and Reference Systems Service (IERS, http://www.iers.org/).

For cartographic coordinates and conventions for planets and satellites, the IAU and the International Association of Geodesy (IAG) have established jointly the Working Group on Cartographic Coordinates and Rotational Elements (WGCCRE), which publishes triennial reports, currently in the journal *Celestial Mechanics and Dynamical Astronomy* (Davies et al., 1980, 1983, 1986, 1989, 1992, 1996; Seidelmann et al., 2002, 2005, 2007; Archinal et al., 2011). This working group includes PDS-affiliated scientists, thus assuring full interaction in defining the standards. Publications and reports issued by the WGCCRE can be found at http://astrogeology.usgs.gov/Projects/ WGCCRE/. PDS data providers should refer to these reports for current information and recommendations on rotational elements for Solar System bodies and how these are related to their cartographic coordinates.

The NASA Lunar Geodesy and Cartography Working Group (LGCWG) and the Mars Geodesy and Cartography Working Group (MGCWG) are sponsored by the NASA Lunar Precursor Robotics Program (LPRP) and Mars Program offices, respectively, and are responsible within NASA for providing additional coordination of cartographic standards and related (e.g., data processing) issues (Archinal et al., 2008a; Archinal et al., 2008b; Duxbury et al. 2002). These Working Groups have made additional recommendations regarding coordinate systems (generally with additional detail) beyond those of the WGCCRE.

# 8.2 Inertial Reference Frame and Time System

The orientation of a body in the Solar System can be calculated using a series of rotation angles to define the directions of the body's principal axes with respect to an inertial reference frame (i.e., a system that is not rotating or accelerating relative to a specific reference point) which provides a standard frame from which position, velocity, and acceleration can be measured. Such a reference frame is a set of identifiable fiducial points and their positions on the sky, providing a practical realization of a reference system that defines the origin, fundamental planes (or axes), and transformations between observed elements and reference points in the celestial coordinate system. Reference coordinate systems are defined by a system of concepts (e.g., using planetocentric latitude and longitude) while a reference coordinate frame is a specific realization of a coordinate system that is anchored to real data (such as a photogrammetric control network, altimetry crossover solutions, or lunar ephemerides) (Kovalevsky and Mueller, 1981).

For a planetary body in space, position is defined relative to a Z axis (typically the spin vector of the body, or the planetographic north pole), the X axis (defined as the point where the equator of the body crosses the equatorial plane of an inertial frame at a specific epoch), and the Y axis of a right-handed system. The standard units for coordinates are based on the International System of Units (SI), including decimal degrees. The orientation of Solar System bodies can be calculated from angular position (right ascension  $\alpha$  and declination  $\delta$ ) with respect to the equatorial system of a particular epoch. For example, the orientation of the north pole of a body at a given epoch

is specified by its right ascension  $\alpha$  and declination  $\delta$ , while the location of the prime meridian is specified by the angle W (Davies et al., 1980).

The standard epoch is called J2000.0 and is defined to be 2000 January 1.5 Barycentric Dynamical Time (TDB) (e.g., Seidelmann et al., 2007). This corresponds to 2000 January 1, 1200 hours Terrestrial Time (TT) or the Julian Date 2451545.0 (NAO, USNO and HMNAO, 1983). This also corresponds to 2000 January 1, 11:58:55.816 Coordinated Universal Time (UTC) (Seidelmann et al., 1992). Although the natural system for many applications would be TDB, UTC is considered the fundamental system for all PDS data products. The standard way of expressing UTC is in year, month, day, hour, minute, and decimal seconds. Julian Dates (JD) are supported as a supplementary system for reporting UTC time. However the JD time scale must be specified (e.g., UTC or TDB). See chapter 11 of this document for further information on time representation.

The currently accepted orientation of the inertial system (i.e., J2000.0 right ascension and declination) is defined by the International Celestial Reference System (ICRS), which is a particular implementation of the Barycentric Celestial Reference System (BCRS) (IAU, 2002). The ICRS is the fundamental celestial reference system of the IAU, and it has an origin at the barycenter of the Solar System and space fixed (kinematically non-rotating) axis directions. As noted by the IAU, the ICRS is meant to represent the most appropriate coordinate system for expressing reference data on the positions and motions of celestial objects. Specifications for the ICRS include a metric tensor, a prescribed method for establishing and maintaining axis directions, a list of benchmark objects with precise coordinates, and standard algorithms to transform these coordinates into observable quantities for any location and time. The ICRS is derived from the International Celestial Reference Frame (ICRF) comprised of coordinates for a set of fiducial points on the sky. The ICRF is within 0.05 arcseconds (Chapront et al., 2002; Herring et al., 2002) of the Solar System inertial frame based on Earth's Mean Equator (EME) at the Equinox of Julian Ephemeris Date (JD) 2451545.0 (i.e., J2000.0). This is consistent with current dynamical practice and spacecraft and planetary ephemerides (e.g., those provided by the NASA Jet Propulsion Laboratory).

Many older data sets, collected before the J2000.0 system and ICRF were defined, are referenced to EME and Equinox of Besselian 1950.0 (B1950.0; JD 2433282.423). While this reference frame should not be used for current data, PDS supports this reference frame for older data. Transformation between the B1950.0 and J2000.0 (and the nearly equivalent ICRF) systems has been well defined by the IAU (NAO, USNO and HMNAO, 1983; also see http://nedwww.ipac.caltech.edu/forms/calculator.html).

Positions may be expressed in other coordinate systems and associated frames, which can be derived from the fundamental system and frame, when this enhances the use of the data for various applications. These include ecliptic-based coordinates and heliographic coordinates. These coordinates, while possibly "natural" for many applications, are derivable from the fundamental system and are therefore treated as supplementary data by PDS. In some cases, it is convenient to work in one preferred coordinate system and then to convert to another, more standard system for products. This practice of providing the natural working coordinates in addition to the coordinates in a fundamental system promotes ease of use of PDS products and should be adopted by all data providers who use coordinate systems other than the fundamental system. As noted above, all supplementary coordinate systems must be fully documented in PDS products and must be negotiated with the PDS prior to delivery.

# 8.3 Spin Axes and Prime Meridians

The spin axis orientations of many Solar System bodies are defined by the WGCCRE in the ICRF inertial reference frame. For historical reasons, the orientation of the spin axis of planets and satellites is defined by the north pole, which is the pole that is on the northern side of the Invariant Plane of the Solar System (close to but not the same as the ecliptic). With this definition of the north pole, it is also necessary to specify whether the rotation is direct or prograde (in the same direction as the Sun's rotation or counterclockwise when viewed from above the north pole) or retrograde (opposite to the direction of the Sun's rotation).

For small bodies such as comets and asteroids, for which precession due to torques can cause large changes in the angular momentum vector, the orientation is defined by the positive pole, which is the pole determined by the right hand rule for rotation. Since some small bodies can be in excited state rotation, there are numerous complications in application that are addressed in more detail in the WGCCRE reports. Depending on the mode of excited state rotation, the axis may coincide with the maximum moment of inertia. Some cases, particularly the case of chaotic rotation, are considered on a case by case basis by the WGCCRE.

If a body has a solid surface, prime meridians for a given longitude system may be defined by specifying the coordinates of a surface feature on the body (usually a small feature such as a crater in the equatorial region) or by the mean direction relative to the parent body for synchronously rotating bodies (e.g., the Moon, the Galilean moons, and most of the Saturnian moons). Where insufficient observations exist to determine the principal moment of inertia, coordinates of a surface feature will be specified and used to define the prime meridian. In the case of planets without solid surfaces, the definition of the prime meridian is somewhat arbitrary. In any case, the actual definitions are decided by the WGCCRE, not by the PDS. We note that influxes of new data often lead to an iterative process to define (or improve) the orientation of the spin axis or other parameters used to define a coordinate system and in these cases the data providers (e.g., spacecraft mission personnel) and the WGCCRE must maintain close contact regarding the definition.

# 8.4 Body-Fixed Planetary Coordinate Systems

Two types of coordinate systems are fixed to the body planetocentric and planetographic. Details of the coordinate systems for planets and satellites differ from those for small bodies and rings. This section discusses only the aspects that are common to all applications. The Planetocentric system has an origin at the center of mass of the body. Planetocentric coordinates are defined by a vector from the center of mass of the body (often approximated as the center of figure) to the point of interest, typically but not necessarily a point on the surface (e.g., an impact crater with known position). The planetocentric latitude is the angle between the equatorial plane and the vector, while the planetocentric longitude is the angle between the prime meridian and the projection of the vector onto the equatorial plane.

The Planetographic system also has an origin at the center of mass of the body. Planetographic coordinates, however, are defined by vectors perpendicular to a reference surface, often a biaxial ellipsoid that is centered on the body and chosen to describe the gross shape of the body. Reference surfaces vary from body to body and are defined by the WGCCRE in consultation with the observers who provide the information to define such surfaces. The most common reference surface is an oblate spheroid aligned with the spin axis of the body. However, for certain applications the reference surface may be a triaxial ellipsoid, a gravitational equipotential, or a higher order surface model.

For a biaxial ellipsoid the planetographic latitude is the angle between the equatorial plane and a vector through the point of interest, where the vector is normal to the reference surface. Planetographic longitude is the angle between the prime meridian and the projection of the same vector onto the equatorial plane. In general, the planetographic vector does not pass through the origin. The vector need not pass through the spin axis but in most realistic cases it does. If the reference surface is a sphere, the planetographic and planetocentric vectors are identical.

The WGCCRE allows for the use of either planetographic or planetocentric coordinates for a given body, so data providers may adopt either system. Historically planetographic coordinates have been preferred for cartographic products, while planetocentric coordinates were used for dynamical (i.e. orbit, gravity field, altimetric) observations and calculations. For the planet Mercury, the MESSENGER mission has chosen to use planetocentric coordinates as the primary coordinate system for all products (Seidelmann et al., 2007). For the planet Mars, the MGCWG and all current NASA missions have chosen to use planetocentric coordinates as the primary coordinate system for products (Duxbury et al., 2002). Producers of printed or electronically printed maps (e.g., in PDF format) may wish to show both types of coordinates.

## 8.4.1 Planets and Satellites

For planets and satellites, the conventions are complicated for historical reasons. In the planetocentric coordinate system, northern latitudes are those in the hemisphere of the body containing the spin pole that points to the northern side of the invariant plane of the Solar System. The body's rotation direction, either prograde or retrograde, must also be specified. Planetocentric longitude increases eastward (i.e., in the direction defined by the right-hand rule and the north pole) from the prime meridian, from 0° to 360°. Thus an external observer sees the longitude decreasing with time if the rotation is prograde but increasing with time if the rotation is retrograde.

North and south planetographic latitude are defined in the same way as for planetocentric latitude, although the numerical values for a given point on the surface, (other than on the equator or at the poles) are different if the reference surface is not a sphere. The definition of planetographic longitude is dependent upon the rotation direction of the body, with the basic definition being that an external observer should see the longitude increasing with time, or that the longitude increases in the direction opposite to the rotation, although there are exceptions due to historical practice for Earth, the Moon, and the Sun. That is to say, the longitude increases to the west if the rotation is prograde (or eastward) and vice versa. Whether the rotation direction is prograde or retrograde can be determined from the current WGCCRE report. See Tables 1 and 2 (or their equivalent in any future report), where the sign of the velocity term for *W* indicates either prograde (positive) or retrograde (negative) rotation. For all bodies a longitude range of 0° to 360° can be used.

For Earth, the Moon, and the Sun, a longitude range of  $-180^{\circ}$  to  $+180^{\circ}$  has been used in the past (including in existing sets of data archived with the PDS, as defined by the Planetary Science Data Dictionary (PDS, 2002) (fix reference - EDR) and is allowed by the WGCCRE. However, for the Moon, the NASA LGCWG and Lunar Reconnaissance Orbiter (LRO) Mission recommend that in the future, only the 0° to 360° range be used (LGCWG, 2008; LRO Project, 2008). For printed or electronically printed maps (e.g., in PDF format), it may be useful to label the longitude grid both with primary 0° to 360° coordinates and  $-180^{\circ}$  to  $+180^{\circ}$  coordinates.

For the Moon, two slightly different reference systems are commonly used to orient the lunar bodyfixed coordinate system. One is the Mean Earth/Polar Axis (ME) system, the preferred system to be used for PDS data products. The other is the axis of figure system, also called the Principal Axis (PA) system, sometimes used internally among instrument teams for specific applications. For computing precise lunar coordinates, the WGCCRE recommends the use of the Jet Propulsion Laboratory (JPL) DE403 ephemeris (which provides lunar orientation in the PA system), rotated into the ME system. The WGCCRE noted in its most recent report that improved versions of the JPL ephemerides were imminent and might be used instead. In fact the JPL DE421 ephemeris is now available and, after rotation into the ME system, is recommended for use (LGCWG, 2008; LRO Project, 2008). The maximum difference between these two frames in the ME system for the period 2000-2019 is only about 6 meters (Archinal, 2008).

#### 8.4.2 Small Bodies

For small bodies (asteroids and comets), both planetographic and planetocentric coordinates follow the same right hand rule that is used to define the positive pole, which can be either above or below the invariant plane of the Solar System. For the simple case of a body with positive pole pointing to the northern hemisphere of the Solar System, this corresponds to longitude, both planetocentric and planetographic, increasing eastward,  $0^{\circ}$  to  $360^{\circ}$ , which in turn corresponds to the case in which the longitude seen by an outside observer decreases with time.

For some small bodies, coordinates based on latitude and longitude alone can be multi-valued in radius i.e., the vector from the center of the body can intersect the surface in more than one place. There may also be complications (due to the irregular shape) which force special procedures when producing a useful, planar map. Such details are discussed in reports of the WGCCRE.

#### 8.4.3 Rings

There is no international standard for ring coordinate systems. Standards in use for such PDS products were defined by experts in the Rings Node, in consultation with a broad cross-section of interested scientists. Conventions for coordinate systems for rings are similar to those for small bodies, in as much as they are all based on a right-hand rule, with longitude increasing in the direction of orbital motion. Thus longitude increases eastward for the prograde-moving rings (Jupiter, Saturn, and Neptune), but it increases westward for retrograde-moving rings of Uranus. Rings also use a positive pole direction following the right hand rule, analogous to the case for small-body rotation, thus coinciding with the North Pole of Jupiter, Saturn, and Neptune, but the South Pole of Uranus.

Coordinates for rings differ from those for planets and small bodies in not being body-fixed because there are no fixed features to define longitude. They are defined in an inertial system that is comoving with the center of mass of the parent body. Specifically, longitudes are measured from the ascending node of the plane of the rings in the ICRF, i.e. the point at which the plane of the rings intersects the ICRF equator. In the case of inclined rings, longitudes are measured as a broken angle from the ascending node of the planets equatorial plane in the ICRF, along the equatorial plane to the ring planes ascending node, and thereafter along the ring plane.

#### 8.4.4 Planetary Plasma Interactions

There are no international standards for values or names of coordinate systems of planetary plasma observations. Recommendations for coordinate systems in the near-Earth environment by Russell

(1971) have been generalized for use with plasma observations at other bodies. More recently, other systems have been defined (e.g., Franz and Harper, 2002) and are currently in use. The coordinate systems used for plasma observations and data analysis typically are right-handed. The primary exception to this rule is the left-handed Jovian System III.

Standards for planetary plasma data products for PDS were defined by experts in the Planetary Plasma Interactions (PPI) Node, following recommendations from Russell (1971) and Franz and Harper (2002) and in consultation with other specialists. Providers and users of PDS data featuring plasma observations are encouraged to use names as defined by these authors where appropriate, and to follow similar name construction when new systems must be defined.

## 8.5 Surface Models

A standard reference surface model commonly used for hard surfaces is the digital terrain model (DTM). The DTM defines body radius or geometric height above the body reference surface as a function of cartographic latitude and longitude. Spheroids, ellipsoids and harmonic expansions giving analytic expressions for radius as a function of cartographic coordinates are all allowed in PDS. A DTM may also define potential height, i.e., elevation, above an equipotential surface, provided the method is specified, including the specification of appropriate constants and gravity field that is used to convert to/from radii and potential height.

The only internationally recognized DTM is the MOLA model for Mars (Seidelmann et al., 2007, page 168 in WGCCRE #10). (WGCCRE #10 is (Archinal et al., 2011), which has only been published online to date, so I'm not sure where the "page 168" comes from. Need to clarify this with Lisa G. - EDR) DTMs are also available for other bodies, including the Moon and several small bodies; but their use is not officially recommended and therefore up to the individual user.

The digital image model (DIM) defines body brightness in a specified spectral band or bands as a function of cartographic latitude and longitude. A DIM may be associated with the surface radius, geometric height, or potential height values in a corresponding DTM or it may be registered independently to a spheroid, ellipsoid, or spherical harmonic expansion.

## 8.6 PDS Keywords for Cartographic Coordinates

NOTE: Work is currently ongoing on defining the cartographic classes to be used in PDS4; drafts of these are expected to be available roughly mid-year, 2011. When they become available, this section will be updated. - EDR

#### 8.6. PDS KEYWORDS FOR CARTOGRAPHIC COORDINATES

To support the descriptions of these various reference coordinate systems and frames, the PDS has defined the following set of geometry data elements [see the Planetary Science Data Dictionary (PDS, 2008) (update ref - EDR) for complete definitions and additional data elements].

A\_AXIS\_RADIUS **B\_AXIS\_RADIUS** C\_AXIS\_RADIUS COORDINATE\_SYSTEM\_CENTER\_NAME COORDINATE\_SYSTEM\_DESC COORDINATE\_SYSTEM\_ID COORDINATE\_SYSTEM\_NAME COORDINATE\_SYSTEM\_REF\_EPOCH COORDINATE\_SYSTEM\_TYPE EASTERNMOST\_LONGITUDE LATITUDE LONGITUDE MAXIMUM\_LATITUDE MAXIMUM\_LONGITUDE MINIMUM\_LATITUDE MINIMUM\_LONGITUDE POSITIVE\_LONGITUDE\_DIRECTION WESTERNMOST\_LONGITUDE

To support the description of locations in a planetary ring system, the PDS has defined the following data elements:

CENTER\_RING\_RADIUS RING\_RADIUS MINIMUM\_RING\_RADIUS MAXIMUM\_RING\_RADIUS

RING\_LONGITUDE MINIMUM\_RING\_LONGITUDE MAXIMUM\_RING\_LONGITUDE

B1950\_RING\_LONGITUDE MINIMUM\_B1950\_RING\_LONGITUDE MAXIMUM\_B1950\_RING\_LONGITUDE

RING\_EVENT\_TIME RING\_EVENT\_START\_TIME RING\_EVENT\_STOP\_TIME

#### CHAPTER 8. CARTOGRAPHIC STANDARDS

#### RADIAL\_RESOLUTION MINIMUM\_RADIAL\_RESOLUTION MAXIMUM\_RADIAL\_RESOLUTION

The radius and longitude elements define an inertial location in the rings, and the ring event time elements define the time at the ring plane to which an observation refers. If desired, the radial resolution elements can be used to specify the radial dimensions of ring features that can be resolved in the data. See the Planetary Science Data Dictionary (PSDD; PDS, 2008) for complete definitions of these elements.

Some rings are not circular and/or equatorial. In these cases, the PSDD provides additional elements that can be used to describe a rings shape. The elements are:

RING\_SEMIMAJOR\_AXIS RING\_ECCENTRICITY RING\_PERICENTER\_LONGITUDE PERICENTER\_PRECESSION\_RATE RING\_INCLINATION RING\_ASCENDING\_NODE\_LONGITUDE NODAL\_REGRESSION\_RATE REFERENCE\_TIME

Here the value of REFERENCE\_TIME indicates the instant at which the LONGITUDE elements are defined. The actual pericenter and ascending node at the time of an observation are determined based on the precession and regression rates as follows:

pericenter\_longitude = RING\_PERICENTER\_LONGITUDE +
 PERICENTER\_PRECESSION\_RATE \*
 (observation\_time - REFERENCE\_TIME) mod 360
 ascending\_node\_longitude =
 RING\_ASCENDING\_NODE\_LONGITUDE +
 NODAL\_REGRESSION\_RATE \*
 (observation\_time - REFERENCE\_TIME) mod 360

The oscillating modes of a ring can also be specified if necessary:

RING\_RADIAL\_MODE RING\_RADIAL\_MODE\_AMPLITUDE RING\_RADIAL\_MODE\_FREQUENCY RING\_RADIAL\_MODE\_PHASE

Additional elements should be used to specify the assumed orientation of the planets pole:

#### 8.7. MAP RESOLUTION

POLE\_RIGHT\_ASCENSION POLE\_DECLINATION COORDINATE\_SYSTEM\_ID

The COORDINATE\_SYSTEM\_ID can be either J2000.0 or B1950.0, with J2000.0 serving as the default. See the PSDD for further details.

### 8.7 Map Resolution

A uniform set of resolutions is helpful for analyses of multiple datasets and development of map products derived from PDS data, and the selected scale must account for differences in available image resolution and quality. Such map scales are measured against a reference surface that is typically a geometrically defined shape that represents a given planetary body. For global maps, the recommended spatial resolution for a map is  $2^n$  pixels per degree of latitude, where a pixel is treated as a finite area and *n* is an integer. A spatial resolution of  $2^n$  pixels per degree allows simple co-registration of multiple datasets by doubling or halving the pixel sizes (typically by averaging or interpolation) and without resampling or otherwise changing the pixels. These recommendations continue a convention established in the 1960s and 1970s by the lunar and Mars research communities (e.g., Batson, 1987; Greeley and Batson, 1990), as advocated by the NASA Planetary Cartography Working Group (PCWG) and its successor the Planetary Cartography and Geologic Mapping Working Group (PCGMWG) (PCWG, 1993, pp. 22-24), and affirmed by the LGCWG (2008).

For polar regions of global maps, the recommendation is also to use the binary map scale or  $2^n$  pixels per degree of latitude near the pole. This practice maintains consistency with the global data product.

For working at landing site scales with data that has pixels of tens of centimeters to a few meters in size, spatial resolutions of maps are more convenient if provided at scales of 1 meter per pixel resolution or multiples thereof (LGCWG, 2008). At such human scales this convention is simpler and will preserve inherent details of resolution for applications such as landing site operations, traversing, and surface engineering studies.

For both global and local maps showing elevation or relief, the recommended vertical resolution is  $1 \times 10^{m}$  meters, where *m* is an integer chosen to preserve all the resolution inherent in the data.

Need to determine desired format for references in Bibliography and design or acquire a .bst file to accomplish that. - EDR

#### CHAPTER 8. CARTOGRAPHIC STANDARDS

Need to determine how to output dois, if available. (Already done for some doc. types, but not others?) - EDR

How to include statement at beginning of section 2.8 in StdRefv3.8 about WGCCRE Report 7 not being issued? This needs to be inserted after the "Bibliography" statement, but before the list of references. - EDR

I've dropped the "chair", "vice-chair" and "consultant" parenthetical statements from the WGC-CRE report references; how important is it to have them? (Can be done, but messes up the citations. Probably fixable with research.) - EDR

Need to fix Archinaletal2008a reference; currently missing name of the "event". Also need to determine how to include URLs in references. - EDR

Need to fix Archinaletal2008b reference to include abstract number and URL. - EDR

For all WGCCRE reports, need to determine how to append report number. - EDR

Need to fix Duxburyetal2002a reference to include meeting name and URL. - EDR

Need to fix GreeleyBatson1990a reference to include number of book pages. - EDR

Need to include URL for IAU2002a. - EDR

I've added information for KovalevskyMueller1981a; is this okay? - EDR

LGCWG2008a - need to add URL; also, how to indicate draft (or find published version)? - EDR  $\,$ 

LRO2008a - need to include verion. - EDR

PCWG1993a only seems to be available as one used copy on Amazon for \$100; is this still publicly available? - EDR

Need to add PDS4 PSDD reference. - EDR

In Seidelmanetal1992a, BibTex doesn't want to use both author and editor fields for Seidelmann; need to fix? - EDR

# **Chapter 9**

# **Context Information**

#### Still needs some rewriting.

Scientific data cannot be properly understood and interpreted without knowledge of the context in which the data was acquired. The PDS requires that contextual information for all archived data be included within the archive or be identified and readily available from external publishers.

This includes such varied information as the mission, spacecraft or other facility within which the instrument operates, the instrument that acquired the data, the target of the investigation, and an overview of the data collection. Additional documentation should be provided on the key personnel associated with the instrument, data, and archiving task. Finally, any external references providing additional, supplementary information about the data should also be included.

PDS maintains a set of context files online for use where relevant.

Much context information evolves during the course of a mission and necessitates update to the context documentation. For example, unexpected events which occur during the course of a mission will necessitate updates documenting the impact of various instrument and spacecraft systems or on the quality of the data. This might include such as 'safing' incidents, instrument anomalies or failures, extensions of the mission, etc.

### 9.1 Investigations

Investigation is a super-category including sub-classes of Mission, Observing Campaign, and Other Investigation. The information may be included directory in the archive or referenced in an exter-

#### CHAPTER 9. CONTEXT INFORMATION

nal journal article. It must be provided and updated by the flight project or other coordinating authority.

## 9.2 Nodes

This information describes the PDS node responsible for curating the archived data. The PDS node is responsible for providing the information.

## 9.3 Observing Systems

#### 9.3.1 Instrument Hosts

Instrument\_Host is a generic term covering any kind of platform on which an instrument may be mounted. The PDS currently recognizes three types of platforms: Laboratory, Rover, and Spacecraft.

#### 9.3.2 Instruments

This information may be either included directly in the PDS archive or located in a journal article published by an external organization. In either case, it is the responsibility of the instrument team or hosting observatory to provide the information.

## 9.4 Personnel

Indicates PDS, mission, and other personnel involved in the production of PDS archives. Includes two sub-categories: PDS Affiliate and PDS Guest. This information will be provided by the investigator.

9.5. PUBLICATIONS / REFERENCES

# 9.5 Publications / References

TBD

# 9.6 Resources

TBD

## 9.7 Software

TBD

# 9.8 Targets

PDS now recognizes multiple targets for instrument observations including: calibration objects, dust, features, regions, rings, solar system bodies, solar wind, and stars. This information will be provided by the PDS, gleaned from external sources.

CHAPTER 9. CONTEXT INFORMATION

# **Chapter 10**

# **Documentation**

Supplementary or ancillary reference materials are usually included with archive products to improve their short- and long-term utility. These documents augment the internal documentation of the product labels and provide further assistance in understanding the data products and accompanying materials. Typical archive documents include:

- Flight project documents
- Instrument papers
- Science articles
- Volume information
- Software Interface Specifications (SISs)
- Software user manuals

The PDS criteria for inclusion of a document in the archive are:

- 1. Would this information be helpful to a data user?
- 2. Is the material necessary?
- 3. Is the documentation complete?

In general, the PDS seeks to err on the side of completeness.

Each document to be archived must be prepared and saved in a PDS-compliant format, including a PDS label. Documents are delivered in the DOCUMENT directory of an archive volume (see the Volume Organization and Naming chapter of this document).

A flat, human-readable ASCII text version of each document must be included on the volume, although additional versions may be included in other supported formats at the option of the data producer. Flat ASCII text means the file may contain only the standard, 7-bit printable ASCII character set, plus the blank character and the carriage-return and linefeed characters as record delimiters. A file is human-readable if it is not encoded and if any special markup tags which may be included do not significantly interfere with an average users ability to read the file. So, for example, simple HTML files and TeX/LaTeX files with relatively little markup embedded in the text are generally considered human-readable and may, therefore, be used to satisfy the above ASCII text version requirement.

Note that the PDS takes the requirement for complete documentation very seriously. Documents that are essential to the understanding of an archive are considered as important as the data files themselves. Furthermore, including a document in a PDS archive constitutes publication (or republication) of that document. Consequently, documents prepared for inclusion in an archive are expected to meet not only the PDS label and format requirements, but also the structural, grammatical and lexical requirements of a refereed journal submission. Documents submitted for archiving which contain spelling errors, poor grammar or illogical organization will be rejected and may ultimately lead to the rejection of the submitted data for lack of adequate documentation.

## **10.1** Data Set Description

Data Set Overview A high level description of the characteristics and properties of a data set

Parameters The primary parameters (measured or derived quantities) included in the data set, with units and sampling intervals

Processing The overall processing used to produce the data set, including a description of the input data (and source), processing methods or software, and primary parameters or assumptions used to produce the data set

Data Detailed description of each data type identified in the Data Set Overview, (e.g., image data, table data, etc.)

Ancillary Data Description of the ancillary information needed to interpret the data set. The ancillary information may or may not be provided along with the data set. If not, this description should include sources or references for locating the ancillary data.

Coordinate System Description of the coordinate system(s) or frame(s) of reference to be used for proper interpretation of the data set

#### 10.2. INSTRUMENT DESCRIPTION

Software Description of software relevant to the data, including software supplied with the data set as well as external software or systems that may be accessed independently to assist in visualization or analysis of the data

# **10.2** Instrument Description

**10.3** Instrument Host Description

# **10.4** Investigation / Mission Description

CHAPTER 10. DOCUMENTATION

# Chapter 11

# **Time Standards**

TBD from ISO 8601

The following is a place holder and needs to be updated.

Potentially need to add info about handling negative (BC) dates.

PDS has adopted a subset of the International Standards Organization Standard (ISO/DIS) 8601 standard entitled Data Element and Interchange Formats - Representations of Dates and Times, and applies the standard across all disciplines in order to give the system generality.

It is important to note that the ISO/DIS 8601 standard covers only ASCII representations of dates and times.

Note that the "SPICE" system, generally used by planetary missions for computing observation geometry, uses additional time systems and time representations.

## **11.1 Date/Times**

In the PDS there are two recognized date/time formats: Now incorrect!

CCYY-MM-DDTHH:MM:SS.sss (preferred format) CCYY-DDDTHH:MM:SS.sss

Each format represents a concatenation of the conventional date and time expressions with the two parts separated by the letter T:

CC - century (00-99) YY - year (00-99) MM - month (01-12) DD - day of month (01-31) DDD - day of year (001-366) T - date/time separator HH - hour (00-23) MM - minute (00-59) SS - second (00-59) sss - fractions of second (000-999)

Note: See Section 7.4 Midnight and Leap Seconds for special cases involving the indication of midnight and leap seconds.

The preferred date/time format is: CCYY-MM-DDTHH:MM:SS.sss.

**Date/Time Precision** 

The above date/time formats may be truncated on the right to match the precision of the date/time value in any of the following forms:

1998 1998-12 1998-12-01 1998-12-01T23 1998-12-01T23:59 1998-12-01T23:59:58 1998-12-01T23:59:58.1 1998-12-01T23:59:58.12

## 11.2 Dates

Dates should be expressed in the conventional ISO/DIS 8601 format. On those rare occasions when dates cannot be expressed in the conventional format, a native format may be used.

#### **11.2.1** Conventional Dates

Conventional dates are represented in ISO/DIS 8601 format as either year (including century), month, day-of-month (CCYY-MM-DD), or as year, day-of-year (CCYY-DDD). The hyphen character (-) is used as the field separator in this format. The year, month, day-of month format is the preferred format for use in PDS labels and catalog files and is referred to as PDS standard date format, but either format is acceptable.

#### **11.2.2** Native Dates

Dates in any format other than the ISO/DIS 8601 format described above are considered to be in a format native to the specific data set, thus native dates. Native date formats are specified by the data preparer in conjunction with the PDS data engineer. Mission-elapsed days and time-to-encounter are both examples of native dates.

## **11.3** Times

The PDS allows times to be expressed in conventional and native (alternate) formats.

#### **11.3.1** Conventional Times

Conventional times are represented as hours, minutes and seconds according to the ISO/DIS 8601 time format standard: HH:MM:SS[.sss]. Note that the hours, minutes, and integral seconds fields must contain two digits. The colon (':') is used as a field separator. Fractional seconds consisting of a decimal point (the European-style comma may not be used) and up to three digits (thousandths of a second) may be included if appropriate.

Coordinated Universal Time (UTC) is the PDS time standard and must be formatted in the previously described ISO/DIS 8601 standard format. The letter "Z", indicating the civil time zone at Greenwich (i.e., GMT), should never be appended to a UTC time. The relationship between UTC and GMT has varied historically and with observer context. Note that in PDS data sets created under earlier versions of the Standards, an appended Z is taken as indicating UTC.

The start\_time and stop\_time attributes required in data product labels are in UTC. For data collected by spacecraft-mounted instruments, the date/ time must be a time that corresponds to space-

craft event time. For data collected by instruments not located on a spacecraft, this time shall be an earth-based event time.

Adoption of UTC (rather than spacecraft-clock-count, for example) as the standard facilitates comparison of data from a particular spacecraft or ground-based facility with data from other sources.

### 11.3.2 Native Times

Times in any format other than the ISO/DIS 8601 format described above are considered to be in a format native to the data set, and thus native times. Data preparers should consult a PDS data engineer for assistance in selecting appropriate PDS attributes for expressing native times.

Examples of quantities that may be expressed in native time formats are included below.

#### 11.3.2.1 Spacecraft Clock Count (sclk)

There is one native time of particular interest, however, which has specific keywords associated with it. The spacecraft clock reading (that is, the count) often provides the essential timing information for a space-based observation. Therefore, the attributes spacecraft\_clock\_start\_count and spacecraft\_clock\_stop\_count are required in labels describing space-based data. This value is formatted as a string to preserve precision.

#### 11.3.2.2 Ephemeris Time

Need to talk to Chuck and/or Boris to determine if they want to say anything here.

#### 11.3.2.3 Relative Time

#### 11.3.2.4 Local (Solar) Time

#### 11.3.2.4.1 Local True Solar Time

The local\_true\_solar\_time attribute describes the local true solar time (LTST). It is one of two types of solar time used to express the time of day at a point on the surface of a planetary body. LTST

#### 11.3. TIMES

is measured relative to the true position of the Sun as seen from a point on the planet's surface. The coordinate system used to define LTST has its origin at the center of the planet. Its Z-axis is the north pole vector (or spin axis) of the planet. The X-axis is chosen to point in the direction of the vernal equinox of the planet's orbit. (The vernal or autumnal equinox vectors are found by searching the planetary ephemeris for those times when the vector from the planet's center to the Sun appears to rise above the planet's equator.) Positions of points in this frame can be expressed as a radius and planetocentric 'right ascension' and 'declination' angles. The planetocentric right ascension angle, or RA, is measured positive eastward in the equatorial plane from the vernal equinox vector to the intersection of the meridian containing the point with the equator. Similarly, the planetocentric declination is the angle between the RAs of the vectors to the Sun and to the point on the planet's surface. Specifically,

LTST = (a(P) - a(TS)) \* (24 / 360) + 12

where,

LTST = the local true solar time in true solar hours a(P) = RA of the point on the planet's surface in deg a(TS) = RA of the true sun in deg

The conversion factor of 24/360 is applied to transform the angular measure in decimal degrees into hours-minutes-seconds of arc. This standard representation divides 360 degrees into 24 hours, each hour into 60 minutes, and each minute into 60 seconds of arc. The hours, minutes, and seconds of arc are called 'true solar' hours, minutes, and seconds when used to measure LTST. The constant offset of 12 hours is added to the difference in RAs to place local noon (12:00:00 in hours, minutes, seconds) at the point where the Sun is directly overhead; at this time, the RA of the true sun is the same as that of the surface point so that a(P) - a(TS) = 0. The use of 'true solar' time units can be extended to define a true solar day as 24 true solar hours. Due to the eccentricity of planetary orbits and the inclination of orbital planes to equatorial planes (obliquity), the Sun does not move at a uniform rate over the course of a planetary year. Consequently, the number of SI seconds in a true solar day, hour, minute or second is not constant. (Definition adapted from Vaughan (1995).)

#### 11.3.2.4.2 Local Mean Solar Time

The desire to work with solar days, hours, minutes, and seconds of uniform length led to the concept of the fictitious mean Sun (FMS). The FMS is defined as a point that moves on the celestial equator of a planetary body at a constant rate that represents the average mean motion of the Sun over a planetary year. local mean solar time (LMST), is defined, by analogy with LTST, as the difference between the planetocentric right ascensions of a point on the surface and of the FMS.

The difference between LTST and LMST varies over time. The length of a mean solar day is constant and can be computed from the mean motion of the FMS and the rotation rate of a planet. The mean solar day is also called a 'sol'. Mean solar hours, minutes, and seconds are defined in the same way as the true solar units.

The acceptable range of values for local\_mean\_solar\_time is '00:00:00.000' to '23:59:59.999'. (Definition adapted from Vaughan (1995).)

# 11.4 Midnight and Leap Seconds

The ISO/DIS 8601 standard for representation of midnight and leap seconds are also used in PDS time fields.

## 11.4.1 Midnight

Midnight may be indicated in one of two ways: as 00:00:00 or 24:00:00. The usual precision modifications apply as well i.e. 24:00 is also recognized as midnight.

The 00:00:00 notation is used to indicate midnight at the beginning of a date. 24:00:00 is used to indicate midnight at the end of a date. So, for example, the following two date/time strings refer to precisely the same moment:

2007-04-07T24:00:00 = 2007-04-08T00:00:00

When the hours field has the value 24, any and all subsequent time fields must be zero.

### 11.4.2 Leap Seconds

Leap seconds may be positive or negative, but in either case are always applied at the end of the day in question. A positive leap second is indicated with a time value of 23:59:60. A negative leap second is indicated by the omission of the time 23:59:59. That is, on the day of a negative leap second, the sequence leading through midnight is:

23:59:57 23:59:58 00:00:00 00:00:01

#### 11.4. MIDNIGHT AND LEAP SECONDS

And on the day of a positive leap second, the sequence through midnight is:

23:59:58 23:59:59 23:59:60 00:00:00 00:00:01

Note that the only time when the seconds value of a time string may contain the value 60 is when this represents a positive leap second.

CHAPTER 11. TIME STANDARDS

# Chapter 12

# **Units of Measurement**

The uniform use of units of measure facilitates broad catalog searches across archive systems. The PDS standard system for units, where applicable, is the SI. The default units for data elements in the PSDD are determined as each element is defined and added to the dictionary. Specific unit definitions are also included in the PSDD.

The PDS allows exceptions to the SI unit requirement when common usage conflicts with the SI standard (e.g., angles which are measured in degrees rather than radians).

Both singular and plural unit names, as well as unit symbols, are allowed. The double asterisk (\*\*) is used, rather than the caret (), to indicate exponentiation. When the units associated with a value of a PDS element are not the same as the default units specified in the PSDD (or when explicit units are preferred), a unit expression is used with the value. These unit expressions are enclosed in angular brackets ( $\frac{1}{2}$ ) and follow the value to which they apply.

Update to indicate implementation using attributes.

Examples Needs to be udpated

EXPOSURE\_DURATION = 10 seconds DECLINATION = -14.2756 degrees MASS = 123 kg MASS\_DENSITY = 123 g/cm<sup>3</sup> MAP\_RESOLUTION = 123 pixel/degree MAP\_SCALE = 123 km/pixel

Note that in the above example, MASS\_DENSITY is not expressed in the SI default unit of measurement for density  $(kg/m^3)$ .

PDS recommends (in order of preference) that measurements be expressed using the default SI units of measurements, as defined in the following paragraphs. If it is not desirable to use the default SI unit of measurement, then the unit of measurement should be expressed using the SI nomenclature defined in the following paragraphs. If a unit of measurement is not defined by the SI standard, then a unit of measurement can be derived (e.g., pixels per degree, kilometers per pixel, etc.).

## 12.1 SI Units

The following summary of SI unit information is extracted from The International System of Units.

*Base units* As the system is currently used, there are seven fundamental SI units, termed base units:

QUANTITY	NAME OF UNIT	SYMBOL
length	meter	m
mass	kilogram	kg
time	second	S
electric current	ampere	А
thermodynamic temperature	kelvin	Κ
amount of substance	mole	mol
luminous intensity	candela	cd

SI units are all written in mixed case; symbols are also mixed case except for those derived from proper names. No periods are used in any of the symbols in the international system.

*Derived units* In addition to the base units of the system, a host of derived units, which stem from the base units, are also employed. One class of these is formed by adding a prefix, representing a power of ten, to the base unit. For example, a kilometer is equal to 1,000 meters, and a millisecond is .001 (that is, 1/1,000) second. The prefixes in current use are as follows:

#### SI PREFIXES

Factor	Prefix	Symbol	Factor	Prefix	Symbol
$10^{18}$	exa	Е	$10^{-1}$	deci	d
$10^{15}$	peta	Р	$10^{-2}$	centi	с
$10^{12}$	tera	Т	$10^{-3}$	milli	m
$10^{9}$	giga	G	$10^{-6}$	micro	
$10^{6}$	mega	Μ	$10^{-9}$	nano	n

$10^{3}$	kilo	k	$10^{-12}$	pico	р
$10^{2}$	hecto	h	$10^{-15}$	femto	f
$10^{1}$	deka	da	$10^{-18}$	atto	а

Note that the kilogram (rather than the gram) was selected as the base unit for mass for historical reasons. Notwithstanding, the gram is the basis for creating mass units by addition of prefixes.

Another class of derived units consists of powers of base units and of base units in algebraic relationships. Some of the more familiar of these are the following:

QUANTITY	NAME OF UNIT	SYMBOL
area	square meter	$m^2$
volume	cubic meter	$m^3$
density	kilogram per cubic meter	$kg/m^3$
velocity	meter per second	m/s
angular velocity	radian per second	rad/s
acceleration	meter per second squared	$m/s^2$
angular acceleration	radian per second squared	$rad/s^2$
kinematic viscosity	square meter per second	$m^2$ /s
dynamic viscosity	newton-second per square meter	$N * s/m^2$
luminance	candela per square meter	$cd/m^2$
wave number	1 per meter	$m^{-1}$
activity (of a radioactive source)	1 per second	$s^{-1}$

Many derived SI units have names of their own:

QUANTITY	NAME OF UNIT	SYMBOL	EQUIVALENT
frequency	hertz	Hz	$s^-1$
force	newton	Ν	$kg*m/s^2$
pressure (mechanical stress)	pascal	Pa	$N/m^2$
work, energy, quantity of heat	joule	J	N * m
power	watt	W	J/s
quantity of electricity poten-	coulomb	С	A * s
tial difference			
electromotive force	volt	V	W/A
electrical resistance	ohm		V/A
capacitance	farad	F	A * s/V
magnetic flux	weber	Wb	V * s
inductance	henry	Н	V * s/A
magnetic flux density	tesla	Т	$Wb/m^2$

#### CHAPTER 12. UNITS OF MEASUREMENT

luminous flux	lumen	lm	cd * sr
illuminance	lux	lx	$lm/m^2$

Supplementary units are as follows:

QUANTITY	NAME OF UNIT	SYMBOL
plane angle	radian	rad
solid angle	steradian	sr

Use of figures with SI units In the international system it is considered preferable to use only numbers between 0.1 and 1,000 in expressing the quantity associated with any SI unit. Thus the quantity 12,000 meters is expressed as 12 km, not 12,000 m. So too, 0.003 cubic centimeters is preferably written 3 mm3, not 0.003 cm3.

Appendices

# **Appendix A**

# **Digital Object Classes**

The classes shown in this appendix describe the digital objects used in basic products such as images, tables, SPICE kernels, documents, and native headers. All of these classes (with the exception of the Document\_Format class; see chapter 10) appear in a File\_Area of a PDS label.

In the tables shown below, the "attributes" are the meta-data words used to describe each digital object. The "associations" provide a relationship between the current class and a related class. When an association is present, it indicates that the specified class either may or must be present within the current class, in the PDS label.

The "Definition" column provides a brief description of the attribute, or specifies the type of association.

The "Card." (cardinality) column indicates the number of instances of a particular attribute or associated class that may occur in the current class. Where a single digit appears, the class must include precisely that number of attributes (or associated classes). Where a range of numbers is specified (using the notation m..n), then any number of attributes in that range may be included. A minimum of "0" means that the attribute or associated class is optional; a maximum of "\*" means that there is no limit on the number of attributes or associated classes that may be included.

In those cases where an attribute has either a single allowed value, or a list of permissible values, those values will be listed in the "Values" column. In cases where there is no specified value, the data type will be listed instead. For associations, the name (or names) of the class (or classes) that fit the specified association type are listed. These class names are linked to the sections in this appendix where they are described. (Not yet implemented.)

Need to add Tagged\_Digital\_Child classes. Need to complete numerous examples.

# A.1 Array\_2D\_Image

The Array 2D Image class is an extension of array\_base and defines a two dimensional image.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	2
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	The axes order attribute indicates the axis index that varies the fastest with respect to axis element storage order.	1	FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	2	Array_Axis
associated_Statistics	The associated_Object_Statistics associa- tion is a relationship to object statistics.	01	Object_Statistics
associated_Special_Constants	The associated_Special_Constants associ- ation is a relationship to special constants.	01	Special_Constants

#### A.1. ARRAY\_2D\_IMAGE

has_image_2d_display	The has_image_2d_display association is	01	Image_2D_Display
	a relationship to Image_2D_Array.		

#### **XML Example**

```
<Array_2D_Image base_class="Array_Base">
  <local_identifier>IMAGE</local_identifier>
  <axes>2</axes>
 <axis_order>FIRST_INDEX_FASTEST</axis_order>
  <encoding_type>BINARY</encoding_type>
  <offset unit_of_measure_type="byte">0</offset>
  <Object_Statistics>
   <local_identifier>STATISTICS</local_identifier>
   <maximum>4095</maximum>
   <md5 checksum>d220dac0d1fe312f3f3b9c824f6ac294</md5 checksum>
   <mean>1385.3000</mean>
   <median>894</median>
   <minimum>145</minimum>
   <sample bit mask>2#00001111111111114</sample bit mask>
    <standard_deviation>538.0290</standard_deviation>
  </Object_Statistics>
  <Array_Axis>
   <name>SAMPLES</name>
   <elements>256</elements>
   <sequence_number>1</sequence_number>
  </Array_Axis>
 <Array_Axis>
   <name>LINES</name>
   <elements>248</elements>
    <sequence_number>2</sequence_number>
  </Array_Axis>
  <Array Element>
   <data_type>UnsignedMSB2</data_type>
    <unit>DN</unit>
  </Array_Element>
  <Image_2D_Display>
    <line_display_direction>DOWN</line_display_direction>
    <sample_display_direction>RIGHT</sample_display_direction>
  </Image_2D_Display>
</Array_2D_Image>
```

# A.2 Array\_2D\_Spectrum

The Array 2D Spectrum class is an extension of array\_base and defines a two dimensional spectrum.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	2
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	The axis order attribute provides the axis index that varies fastest with respect to storage order.	1	FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	2	Array_Axis

## XML Example

```
<Array_2D_Spectrum base_class="Array_Base">
    <local_identifier>SPECTRUM</local_identifier>
    <axes>2</axes>
```

#### A.2. ARRAY\_2D\_SPECTRUM

```
<axis_order>FIRST_INDEX_FASTEST</axis_order>
 <encoding_type>BINARY</encoding_type>
 <offset unit_of_measure_type="byte">0</offset>
 <Array_Axis>
   <name>token</name>
   <unit>AU</unit>
    <elements>0</elements>
   <sequence_number>0</sequence_number>
 </Array_Axis>
 <Array_Axis>
   <name>token</name>
    <unit>AU</unit>
   <elements>0</elements>
    <sequence_number>0</sequence_number>
  </Array_Axis>
  <Array_Element>
   <data_type>IEEE754Double</data_type>
   <scaling_factor>0.0</scaling_factor>
   <value_offset>0</value_offset>
   <unit>AU</unit>
  </Array_Element>
</Array_2D_Spectrum>
```

# A.3 Array\_2D\_Map

The Array 2D Map class is an extension of array\_base and defines a two dimensional map.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	2
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	The axis order attribute provides the axis index that varies fastest with respect to storage order.	1	FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	2	Array_Axis

### **XML Example**

Note that the following example utilizes the Imaging Node **Cartography** class, which has not yet been approved.

```
<Array_2D_Map base_class="Array_Base">
```

#### A.3. ARRAY\_2D\_MAP

```
<local_identifier>MAP</local_identifier>
<axes>2</axes>
<axis order>FIRST INDEX FASTEST</axis order>
<encoding_type>BINARY</encoding_type>
<offset unit_of_measure_type="byte">0</offset>
<Array_Axis>
 <name>SAMPLES</name>
 <elements>873</elements>
  <sequence_number>1</sequence_number>
</Array_Axis>
<Array_Axis>
 <name>LINES</name>
 <elements>437</elements>
  <sequence_number>2</sequence_number>
</Array_Axis>
<Array_Element>
 <data_type>UnsignedMSB2</data_type>
 <scaling_factor>1.028247E-04</scaling_factor>
 <value offset>-9.01289780E-04</value offset>
  <unit>?</unit>
</Array_Element>
<Cartography>
  <Spatial_Domain>
    <Bounding_Coordinates>
      <east_bounding_coordinate>180.0</east_bounding_coordinate>
      <north_bounding_coordinate>90.0</north_bounding_coordinate>
      <south_bounding_coordinate>-90.0</south_bounding_coordinate>
      <west_bounding_coordinate>-180.0</west_bounding_coordinate>
    </Bounding_Coordinates>
  </Spatial_Domain>
  <Spatial Reference Information>
    <Horizontal Coordinate System Definition>
      <Geographic>
        <latitude_resolution unit_of_measure_type="deg">token</latitude_resolution</pre>
        <longitude_resolution unit_of_measure_type="deg">token</longitude_resolut.
      </Geographic>
      <Planar>
        <Map_Projection>
          <map_projection_name>Sinusoidal</map_projection_name>
          <Sinusoidal>
            <longitude_of_central_meridian>token</longitude_of_central_meridian>
            <upper_left_corner_x>token</upper_left_corner_x>
            <upper_left_corner_y>token</upper_left_corner_y>
          </Sinusoidal>
        </Map_Projection>
      </Planar>
      <Geodetic_Model>
        <semi major axis>1737.4</semi major axis>
        <semi_minor_axis>1737.4</semi_minor_axis>
        <polar_radius>1737.4</polar_radius>
        <longitude_direction>POSITIVE_EAST</longitude_direction>
```

#### APPENDIX A. DIGITAL OBJECT CLASSES

```
<coordinate_system_name>PLANETOGRAPHIC</coorindate_system_name>
        <coordinate_system_type>BODY-FIXED ROTATING</coordinate_system_type>
        </Geodetic_Model>
        </Horizontal_Coordinate_System_Definition>
        </Spatial_Reference_Information>
        </Cartography>
        </Array_2D_Map>
```

## A.4 Array\_3D\_Image

The Array 3D Image class is an extension of array\_base and defines a three dimensional image.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	3
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	The axis order attribute provides the axis index that varies fastest with respect to storage order.	1	FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	3	Array_Axis

```
<Array_3D_Image base_class="Array_Base">
    <local_identifier>COLOR_IMAGE</local_identifier>
        <axes>3</axes>
```

#### APPENDIX A. DIGITAL OBJECT CLASSES

```
<axis_order>FIRST_INDEX_FASTEST</axis_order>
  <encoding_type>BINARY</encoding_type>
  <offset unit_of_measure_type="byte">0</offset>
  <Array_Axis>
    <name>SAMPLES</name>
   <elements>121</elements>
    <sequence_number>1</sequence_number>
  </Array_Axis>
  <Array_Axis>
   <name>LINES</name>
    <elements>128</elements>
    <sequence_number>2</sequence_number>
  </Array_Axis>
  <Array_Axis>
   <name>BANDS</name>
    <elements>3</elements>
    <sequence_number>3</sequence_number>
  </Array_Axis>
  <Array_Element>
    <data_type>UnsignedByte</data_type>
    <unit>DN</unit>
  </Array_Element>
</Array_3D_Image>
```

**Attributes & Associations** 

## A.5 Array\_3D\_Spectrum

The Array 3D Spectrum class is an extension of array\_base and defines a three dimensional spectrum.

Attribute	Definition

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	3
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	der The axis order attribute provides the axis index that varies fastest with respect to storage order.		FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	3	Array_Axis

### XML Example

Note that the following example utilizes the **Band\_Bin\_Set** class, which has not yet been approved.

```
<Array_3D_Spectrum base_class="Array_Base">
  <local identifier>QUBE</local identifier>
  <axes>3</axes>
  <axis_order>FIRST_INDEX_FASTEST</axis_order>
  <encoding_type>BINARY</encoding_type>
  <offset unit_of_measure_type="byte">0</offset>
  <Array_Axis>
    <name>SAMPLES</name>
    <elements>343</elements>
    <sequence_number>1</sequence_number>
  </Array_Axis>
  <Array_Axis>
    <name>LINES</name>
    <elements>79</elements>
    <sequence_number>2</sequence_number>
  </Array_Axis>
  <Array_Axis>
    <name>BANDS</name>
    <elements>238</elements>
    <sequence number>3</sequence number>
    <Band Bin Set>
      <unit>micrometer</unit>
      <Band_Bin>
        <band_number>1</band_number>
        <center_wavelength>0.7036<center_wavelength>
        <detector_number>1</detector_number>
        <grating_position>0</grating_position>
        <original_band>1</original_band>
        <scaling_factor>0.2021</scaling_factor>
        <value_offset>26.97</value_offset>
      </Band Bin>
      <Band Bin>
        <band number>2</band number>
        <center_wavelength>0.7101<center_wavelength>
        <detector_number>1</detector_number>
        <grating_position>1</grating_position>
        <original band>2</original band>
        <scaling_factor>0.2200</scaling_factor>
        <value_offset>26.97</value_offset>
      </Band_Bin>
      <Band_Bin>
        <band_number>3</band_number>
        <center_wavelength>0.7166<center_wavelength>
        <detector_number>1</detector_number>
        <grating_position>2</grating_position>
        <original_band>3</original_band>
        <scaling_factor>0.2375</scaling_factor>
        <value_offset>26.97</value_offset>
      </Band Bin>
```

112

.

#### A.5. ARRAY\_3D\_SPECTRUM

# A.6 Array\_3D\_Movie

The Array 3D Movie class is an extension of array\_base and defines a movie as a set of two dimensional images in a time series.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
axes	The axes attribute provides a count of the axes.	1	3
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
axis_order	The axis order attribute provides the axis index that varies fastest with respect to storage order.	1	FIRST_INDEX_FASTEST
Association	Definition	Card.	Values
has_Array_Element	The has_Array_Element association is a relationship to array element.	1	Array_Element
has_Array_Axis	The has_Array_Axis association is a rela- tionship to array axis.	3	Array_Axis

### XML Example

Note that the following example utilizes the Axis\_Display class, which has not yet been approved.

#### A.6. ARRAY\_3D\_MOVIE

```
<Array_3D_Movie base_class="Array_Base">
 <local identifier>MOVIE</local identifier>
 <axes>3</axes>
 <axis_order>FIRST_INDEX_FASTEST</axis_order>
  <encoding_type>BINARY</encoding_type>
  <offset unit_of_measure_type="byte">0</offset>
  <Array_Axis>
    <name>SAMPLE</name>
    <elements>256</elements>
   <sequence_number>1</sequence_number>
    <Axis_Display>
      <display_direction>RIGHT</display_direction>
    </Axis_Display>
  </Array_Axis>
  <Array_Axis>
    <name>LINE</name>
    <elements>248</elements>
   <sequence_number>2</sequence_number>
    <Axis_Display>
      <display_direction>DOWN</display_direction>
    </Axis_Display>
  </Array_Axis>
  <Array_Axis>
    <name>TIME</name>
    <elements>27</elements>
    <sequence_number>3</sequence_number>
    <Axis_Display>
      <display_direction>SEQUENTIAL</display_direction>
     <frame_rate>10</frame_rate>
      <continuous_loop_flag>YES</continuous_loop_flag>
    </Axis_Display>
  </Array_Axis>
  <Array_Element>
    <data_type>IEEE754Double</data_type>
    <scaling_factor>0.0</scaling_factor>
    <value_offset>0</value_offset>
    <unit>AU</unit>
  </Array_Element>
</Array_3D_Movie>
```

# A.7 Table\_Character

The Table Character class is an extension of table base and defines a simple character table.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	[integer]
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
Association	Definition	Card.	Values
has_Record	The has_Record association is a relation- ship to record.	1	Table_Record_Character
uniformly_sampled	The uniformly_sampled association is a relationship to Uniformly_Sampled.	01	Uniformly_Sampled

### XML Example

<Table\_Character base\_class="Table\_Base">

#### A.7. TABLE\_CHARACTER

```
<local_identifier>TABLE</local_identifier>
<encoding type>CHARACTER</encoding type>
<fields>8</fields>
<offset unit_of_measure_type="byte">142</offset>
<record bytes>71</record bytes>
<records>10</records>
<Table_Record_Character>
  <Table_Character_Field>
    <name>PRODUCT_TYPE</name>
    <description>Magellan DMAT type code. Possible values are F-MIDR, C1-MIDR, C1
    <data_type>ASCII_Short_String_Collapsed</data_type>
    <field_location>2</field_location>
    <field_length>7</field_length>
  </Table_Character_Field>
  <Table_Character_Field>
    <name>PRODUCT_ID</name>
    <description>Magellan DMAT name of product. Example: F-MIDR.20N334;1</description</pre>
    <data_type>ASCII_Short_String_Collapsed</data_type>
    <field_location>12</field_location>
    <field length>16</field length>
  </Table_Character_Field>
  <Table_Character_Field>
    <name>SEAM_CORRECTION_TYPE</name>
    <description>A value of C indicates that cross-track seam correction has been
    <data_type>ASCII_Short_String_Collapsed</data_type>
    <field_location>31</field_location>
    <field_length>1</field_length>
  </Table_Character_Field>
  <Table_Character_Field>
    <name>MAXIMUM_LATITUDE</name>
    <description>Northernmost frame latitude rounded to the nearest degree.</desc</pre>
    <data_type>ASCII_Integer</data_type>
    <field_location>34</field_location>
    <field_length>3</field_length>
    <unit>deg</unit>
  </Table_Character_Field>
  <Table Character Field>
    <name>MINIMUM_LATITUDE</name>
    <description>Southernmost frame latitude rounded to the nearest degree.</desc</pre>
    <data_type>ASCII_Integer</data_type>
    <field_location>38</field_location>
    <field_length>3</field_length>
    <unit>deg</unit>
  </Table_Character_Field>
  <Table_Character_Field>
    <name>EASTERNMOST_LONGITUDE</name>
    <description>Easternmost frame longitude rounded to the nearest degree.</desc</pre>
    <data_type>ASCII_Integer</data_type>
    <field_location>42</field_location>
    <field_length>3</field_length>
    <unit>deg</unit>
```

#### APPENDIX A. DIGITAL OBJECT CLASSES

```
</Table_Character_Field>

<Table_Character_Field>

<name>WESTERNMOST_LONGITUDE</name>

<description>Westernmost frame longitude rounded to the nearest degree.</description

<data_type>ASCII_Integer</data_type>

<field_location>46</field_location>

<field_length>3</field_length>

<unit>deg</unit>

</Table_Character_Field>

</Table_Character>
```

## A.8 Table\_Character\_Grouped

The Table Character Grouped class is an extension of table base and defines a simple character table that allows repeating groups of fields.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	[integer]
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
Association	Definition	Card.	Values
has_Record	The has_Record association is a relation- ship to record.	1	Table_Record_Character_Grouped

```
<Table_Character_Grouped base_class="Table_Base">
<local_identifier>token</local_identifier>
<comment>token</comment>
```

```
<encoding_type>CHARACTER</encoding_type>
  <fields>0</fields>
  <offset unit of measure type="byte">0</offset>
  <record_bytes>0</record_bytes>
  <records>0</records>
  <Table_Record_Character_Grouped>
    <Table_Character_Grouped_Sequence>
      <repetitions>0</repetitions>
      <Table_Character_Field_Sequence>
        <Table_Character_Grouped_Field>
          <name>token</name>
          <description>token</description>
          <field_number>0</field_number>
          <data_type>ASCII_AnyURI</data_type>
          <field location>0</field location>
          <field_length>0</field_length>
          <field_format>token</field_format>
          <minimum_scaled_value>token</minimum_scaled_value>
          <maximum_scaled_value>token</maximum_scaled_value>
          <scaling factor>0.0</scaling factor>
          <value_offset>0</value_offset>
          <unit>AU</unit>
        </Table_Character_Grouped_Field>
        <Table_Character_Grouped_Sequence/>
      </Table_Character_Field_Sequence>
    </Table_Character_Grouped_Sequence>
  </Table_Record_Character_Grouped>
</Table_Character_Grouped>
```

## A.9 Inventory\_LIDVID\_Primary

The Inventory LIDVID Primary class defines the inventory for primary members of a collection.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	2
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displacement of the object starting position from the be- ginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
reference_association_type	The refer- ence_association_type at- tribute describes the type of association.	1	has_member_LIDVID_Primary
Association	Definition	Card.	Values

has_Record	The has_Record association is	1	Table_Record_Inventory_LIDVID_Primary	
	a relationship to record.			

```
<Inventory_LIDVID_Primary base_class="Table_Base">
  <local_identifier>token</local_identifier>
  <comment>token</comment>
  <encoding_type>CHARACTER</encoding_type>
  <fields>2</fields>
  <offset unit_of_measure_type="byte">0</offset>
  <record_bytes>0</record_bytes>
  <records>0</records>
  <reference_association_type>has_member</reference_association_type>
  <Table_Record_Inventory_LIDVID_Primary>
    <Table_Field_LIDVID>
      <name>LIDVID</name>
      <description>token</description>
      <field number>1</field number>
      <data type>ASCII LIDVID</data type>
      <field_location>1</field_location>
      <field_length>0</field_length>
      <field_format>urn:nasa:pds:xxxx::M.n</field_format>
    </Table_Field_LIDVID>
    <Table_Field_File_Specification_Name>
      <name>file_specification_name</name>
      <description>token</description>
      <field_number>2</field_number>
      <data_type>ASCII_File_Specification_Name</data_type>
      <field_location>0</field_location>
      <field_length>0</field_length>
      <field format>dir1/dir2/file name.file extension</field format>
    </Table_Field_File_Specification_Name>
  </Table_Record_Inventory_LIDVID_Primary>
</Inventory_LIDVID_Primary>
```

## A.10 Inventory\_LIDVID\_Secondary

The Inventory LIDVID Secondary class defines the inventory for secondary members of a collection. The references are LIDVIDs.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	1
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displacement of the object starting position from the be- ginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
reference_association_type	The refer- ence_association_type at- tribute describes the type of association.	1	has_member_LIDVID_Secondary
Association	Definition	Card.	Values

has_Record	The has_Record association is	1	Table_Record_Inventory_LIDVID_Secondary	
	a relationship to record.			

```
<Inventory_LIDVID_Secondary base_class="Table_Base">
  <local_identifier>token</local_identifier>
  <comment>token</comment>
  <encoding_type>CHARACTER</encoding_type>
  <fields>1</fields>
  <offset unit_of_measure_type="byte">0</offset>
  <record_bytes>0</record_bytes>
  <records>0</records>
  <reference_association_type>has_member</reference_association_type>
  <Table_Record_Inventory_LIDVID_Secondary>
    <Table_Field_LIDVID>
      <name>LIDVID</name>
      <description>token</description>
      <field number>1</field number>
      <data_type>ASCII_LIDVID</data_type>
      <field_location>1</field_location>
      <field_length>0</field_length>
      <field_format>urn:nasa:pds:xxxx::M.n</field_format>
    </Table_Field_LIDVID>
  </Table_Record_Inventory_LIDVID_Secondary>
</Inventory_LIDVID_Secondary>
```

### A.11 Inventory\_LID\_Secondary

The Inventory LID Secondary class defines the inventory for secondary members of a collection. The references are LIDs.

#### Attribute Definition Card. Values 1 The encoding\_type attribute CHARACTER encoding\_type provides the storage format (binary or character). local\_identifier 1 The local\_identifier attribute [string] provides a character string which uniquely identifies the containing object within the label. record\_bytes The record\_bytes attribute 1 [integer] provides a count of the bytes in a record, including a record delimiter, if present. fields The fields attribute provides a 1 1 count of the fields records The records attribute provides 1 [integer] a count of records. 1 offset The offset attribute provides [integer] the displacement of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0. has\_member\_LID\_Secondary 1 reference\_association\_type The reference\_association\_type attribute describes the type of association. Association Definition Card. Values

#### **Attributes & Associations**

has_Record	The has_Record association is	1	Table_Record_Inventory_LID_Secondary	
	a relationship to record.			

```
<Inventory_LID_Secondary base_class="Table_Base">
  <local_identifier>token</local_identifier>
  <comment>token</comment>
  <encoding_type>CHARACTER</encoding_type>
  <fields>1</fields>
  <offset unit_of_measure_type="byte">0</offset>
  <record_bytes>0</record_bytes>
  <records>0</records>
  <reference_association_type>has_member</reference_association_type>
  <Table_Record_Inventory_LID_Secondary>
    <Table_Field_LID>
      <name>LID</name>
      <description>token</description>
      <field number>1</field number>
      <data_type>ASCII_LID</data_type>
      <field_location>1</field_location>
      <field_length>0</field_length>
      <field_format>urn:nasa:pds:xxxx</field_format>
    </Table_Field_LID>
  </Table_Record_Inventory_LID_Secondary>
</Inventory_LID_Secondary>
```

## A.12 Delivery\_Manifest

The Delivery\_Manifest class defines a two column table for file references. The table structure is compatible with the output from an MD5 checksum utility.

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	2
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
reference_association_type	The reference_association_type attribute describes the type of association.		has_member
Association	Definition	Card.	Values
has_Record	The has_Record association is a relation- ship to record.	1	Table_Record_Manifest

#### **Attributes & Associations**

## A.13 Table\_Binary

The Table Binary class is an extension of table base and defines a simple binary table.

### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	[integer]
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
Association	Definition	Card.	Values
has_Record	The has_Record association is a relation- ship to record.	1	Table_Record_Binary
uniformly_sampled	The uniformly_sampled association is a relationship to Uniformly_Sampled.	01	Uniformly_Sampled

### XML Example

<Table\_Binary base\_class="Table\_Base">

#### A.13. TABLE\_BINARY

```
<local_identifier>token</local_identifier>
  <comment>token</comment>
  <encoding type>BINARY</encoding type>
 <fields>0</fields>
  <offset unit_of_measure_type="byte">0</offset>
 <record_bytes>0</record_bytes>
  <records>0</records>
  <Table_Record_Binary>
   <Table_Binary_Field>
      <name>token</name>
      <description>token</description>
      <field_number>0</field_number>
      <data_type>ASCII_AnyURI</data_type>
      <field location>0</field location>
      <field_length>0</field_length>
      <field_format>token</field_format>
      <minimum_scaled_value>token</minimum_scaled_value>
      <maximum_scaled_value>token</maximum_scaled_value>
      <scaling_factor>0.0</scaling_factor>
      <value offset>0</value offset>
      <unit>AU</unit>
      <Special_Constants>
        <error_constant>token</error_constant>
        <invalid_constant>token</invalid_constant>
        <missing_constant>token</missing_constant>
        <not_applicable_constant>token</not_applicable_constant>
        <saturated_constant>token</saturated_constant>
        <unknown_constant>token</unknown_constant>
      </Special_Constants>
      <Field_Statistics>
        <local identifier>token</local identifier>
        <description>token</description>
        <maximum>0.0</maximum>
        <mean>0.0</mean>
        <median>0.0</median>
        <minimum>0.0</minimum>
        <sample bit mask>sample bit mask</sample bit mask>
        <standard_deviation>0.0</standard_deviation>
      </Field_Statistics>
    </Table_Binary_Field>
  </Table_Record_Binary>
  <Uniformly_Sampled>
    <first_sampling_parameter_value>0.0</first_sampling_parameter_value>
    <last_sampling_parameter_value>0.0</last_sampling_parameter_value>
    <sampling_parameter_interval>0.0</sampling_parameter_interval>
    <sampling_parameter_name>along_track_distance</sampling_parameter_name>
    <sampling_parameter_scale>EXPONENTIAL</sampling_parameter_scale>
    <sampling_parameter_unit>...</sampling_parameter_unit>
  </Uniformly Sampled>
</Table_Binary>
```

## A.14 Table\_Binary\_Grouped

The Table Binary Grouped class is an extension of table base and defines a simple binary table that allows repeating groups of fields.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
record_bytes	The record_bytes attribute provides a count of the bytes in a record, including a record delimiter, if present.	1	[integer]
fields	The fields attribute provides a count of the fields	1	[integer]
records	The records attribute provides a count of records.	1	[integer]
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
Association	Definition	Card.	Values
has_Record	The has_Record association is a relation- ship to record.	1	Table_Record_Binary_Grouped

```
<Table_Binary_Grouped base_class="Table_Base">
<local_identifier>PROTON_TABLE</local_identifier>
<encoding_type>BINARY</encoding_type>
```

#### A.14. TABLE\_BINARY\_GROUPED

```
<fields>???</fields>
 <offset unit_of_measure_type="byte">23040</offset>
 <record_bytes>512</record_bytes>
 <records>1</records>
 <Table_Record_Binary_Grouped>
    <Table_Binary_Grouped_Sequence>
      <repetitions>1</repetitions>
      <Table_Binary_Field_Sequence>
        <Table_Binary_Grouped_Field>
          <name>ALPHA_SAMPLING_DURATION</name>
          <description>Accumulation time for this spectrum in units of 10 seconds.<</pre>
          <data_type>UnsignedLSB2</data_type>
          <field_location>1</field_location>
          <field_length>2</field_length>
        </Table_Binary_Grouped_Field>
        <Table_Binary_Grouped_Sequence/>
      </Table_Binary_Field_Sequence>
    </Table_Binary_Grouped_Sequence>
  </Table_Record_Binary_Grouped>
</Table_Binary_Grouped>
```

## A.15 Stream\_Delimited

The Stream Delimited class defines a simple spreadsheet.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute provides the formal name of a standard	1	CSV OTHER
offset	not under PDS governance. The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
fields	The fields attribute provides a count of the fields	1	[integer]
record_delimiter	The record delimiter attribute provides the character or characters used to indicate the end of a record.	1	0xOA 0xOD 0xOD_0xOA
records	The records attribute provides a count of records.	1	[integer]
maximum_record_length	The maximum_record_length attribute provides the upper, inclusive bound on the length of a record, including any record delimiter.	1	[string]
field_delimiter	The field_delimiter attribute provides the character or characters that indicate the end of a character string.	1	0x09 0x3B 0x7C 0x2C
Association	Definition	Card.	Values

### A.15. STREAM\_DELIMITED

has_stream_record	The has_stream_record association is a re- lationship to record.	1*	Stream_Delimited_Record

(Ctroom Dolimitod)
<stream_delimited></stream_delimited>
<pre><local_identifier>SPREADSHEET</local_identifier> </pre>
<pre><encoding_type>CHARACTER</encoding_type></pre>
<pre><external_standard_id>CSV</external_standard_id></pre>
<field_delimiter>0x2C</field_delimiter>
<fields>385</fields>
<maximum_record_length>3336</maximum_record_length>
<offset unit_of_measure_type="byte">10489</offset>
<record_delimiter>0x0D_0x0A</record_delimiter>
<records>2210</records>
<stream_delimited_record></stream_delimited_record>
<stream_delimited_grouped_sequence></stream_delimited_grouped_sequence>
<repetitions>1</repetitions>
<stream_delimited_field_sequence></stream_delimited_field_sequence>
<stream_delimited_field></stream_delimited_field>
<name>token</name>
<description>token</description>
<field_number>0</field_number>
<data_type>IEEE754Double</data_type>
<field_length>0</field_length>
<field_format>token</field_format>
<minimum_scaled_value>token</minimum_scaled_value>
<maximum_scaled_value>token</maximum_scaled_value>
<scaling_factor>0.0</scaling_factor>
<value_offset>0</value_offset>
<unit>AU</unit>
<field statistics=""></field>
<local_identifier>token</local_identifier>
<pre></pre>
<maximum>0.0</maximum>
<mean>0.0</mean>
<median>0.0</median>
<pre><minimum>0.0</minimum></pre>
<pre><sample_bit_mask>sample_bit_mask</sample_bit_mask></pre>
<pre><standard_deviation>0.0</standard_deviation></pre>
<pre></pre> <pre>&lt;</pre>
<pre></pre>
<pre></pre>
<pre>&gt;&gt;pream_berranced&gt;</pre>

### A.16 XML\_Schema

The XML Schema class defines a text stream file containing XML Schema.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute pro- vides the formal name of a standard not under PDS governance.	1	XML_Schema
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]

#### **XML Example**

```
<XML_Schema>
<local_identifier>SCHEMA</local_identifier>
<comment>This is the XML specific schema for all products in the URN:NASA:PDS:VGR2-N/NSJ
<encoding_type>CHARACTER</encoding_type>
<external_standard_id>XML_Schema</external_standard_id>
<offset unit_of_measure_type="byte">0</offset>
</XML_Schema>
```

### A.17 Service\_Description

The Service Description class defines a file that contains a standardized service specification.

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute provides the formal name of a standard	1	WSDL WADL
offset	not under PDS governance. The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]

#### **Attributes & Associations**

### XML Example

#### Example incomplete.

```
<Service_Description>
<local_identifier>SERVICE</local_identifier>
<comment>token</comment>
<encoding_type>CHARACTER</encoding_type>
<external_standard_id>WADL</external_standard_id>
<offset unit_of_measure_type="byte">0</offset>
</Service_Description>
```

## A.18 SPICE\_Kernel\_Text

The SPICE Kernel class describes a SPICE file.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute pro- vides the formal name of a standard not under PDS governance.	1	SPICE
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
kernel_type	The kernel_type attribute identifies the type of SPICE kernel.	1	LSK SCLK PCK EK IK FK MK

#### **XML Example**

#### Example incomplete.

```
<SPICE_Kernel_Text>
  <local_identifier>token</local_identifier>
   <comment>token</comment>
   <encoding_type>CHARACTER</encoding_type>
   <external_standard_id>SPICE</external_standard_id>
```

#### A.18. SPICE\_KERNEL\_TEXT

```
<kernel_type>EK</kernel_type>
<offset unit_of_measure_type="byte">0</offset>
</SPICE_Kernel_Text>
```

## A.19 Header

The Header class describes a data object header.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	CHARACTER
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute provides the formal name of a standard not under PDS governance.	1	VICAR ODL FITS ISIS
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
bytes	The bytes attribute provides the number of bytes in the object.	1	[string]
description	The description attribute provides a state- ment, picture in words, or account that describes or is otherwise relevant to the object.	01	[string]
name	The name attribute provides a word or combination of words by which the ob- ject is known.	01	[string]

### XML Example

```
<Header>
<local_identifier>VICAR Header</local_identifier>
<bytes>2048</bytes>
```

#### A.19. HEADER

```
<encoding_type>CHARACTER</encoding_type>
<external_standard_id>VICAR</external_standard_id>
<offset unit_of_measure_type="byte">0</offset>
</Header>
```

### A.20 File\_PDF

The File PDF class describes a PDF encoded byte stream.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute pro- vides the formal name of a standard not under PDS governance.	1	PDF
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]

#### **XML Example**

```
<File_PDF>
   <local_identifier>PDF</local_identifier>
     <comment>Users Guide: The Imager for Mars Pathfinder, version 1.3, Feb. 3, 1997, by Dan
   <encoding_type>BINARY</encoding_type>
     <external_standard_id>PDF</external_standard_id>
     <offset unit_of_measure_type="byte">0</offset>
<//File_PDF>
```

## A.21 SPICE\_Kernel\_Binary

The SPICE Kernel class describes a SPICE file.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute pro- vides the formal name of a standard not under PDS governance.	1	SPICE
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]
kernel_type	The kernel_type attribute identifies the type of SPICE kernel.	1	SPK PCK CK EK DSK DBK

#### **XML Example**

Example incomplete.

```
<SPICE_Kernel_Binary>
  <local_identifier>token</local_identifier>
   <comment>token</comment>
   <encoding_type>BINARY</encoding_type>
   <external_standard_id>SPICE</external_standard_id>
   <kernel_type>EK</kernel_type>
```

```
<offset unit_of_measure_type="byte">0</offset>
</SPICE_Kernel_Binary>
```

## A.22 Encoded\_Image

The Encoded Image class, a subclass of Encoded Byte stream is used for ancillary images in standard formats, such as JPEG.

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute provides the formal name of a standard not under PDS governance.	1	JPEG GIF TIFF PDF
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]

### **Attributes & Associations**

```
<Encoded_Image>
```

```
<local_identifier>GIF</local_identifier>
<comment>This GIF image is a browse product.</comment>
<encoding_type>BINARY</encoding_type>
<external_standard_id>GIF</external_standard_id>
<offset unit_of_measure_type="byte">0</offset>
</Encoded_Image>
```

## A.23 Encoded\_Binary

The Encoded Binary class describes a binary encoded byte stream. This class is used to describe files in the repository that are being registered using Product\_File\_Repository.

#### **Attributes & Associations**

Attribute	Definition	Card.	Values
encoding_type	The encoding_type attribute provides the storage format (binary or character).	1	BINARY
local_identifier	The local_identifier attribute provides a character string which uniquely identifies the containing object within the label.	1	[string]
external_standard_id	The external_standard_id attribute pro- vides the formal name of a standard not under PDS governance.	1	System
offset	The offset attribute provides the displace- ment of the object starting position from the beginning of the parent structure (file, record, etc.). If there is no displacement, offset=0.	1	[integer]

### **XML Example**

#### Example incomplete.

```
<Encoded_Binary>
  <local_identifier>token</local_identifier>
   <comment>token</comment>
   <encoding_type>BINARY</encoding_type>
   <external_standard_id>System</external_standard_id>
   <offset unit_of_measure_type="byte">0</offset>
  </Encoded_Binary>
```

# Acronyms

ASCII American Standard Code for Information Interchange. 29, 30, 34, 35

BCRS Barycentric Celestial Reference System. 65

CCSDS Consultative Committee for Space Data Systems. 2, 3

**DIM** digital image model. 70

**DOI** Digital Object Identifier. 35

DOY Day Of Year. 33, 34

**DPH** Data Provider's Handbook. 1, 2

**DTM** digital terrain model. 70

ebXML electronic business eXtensible Markup Language. 3

**EME** Earth's Mean Equator. 65

FMS fictitious mean Sun. 87, 88

FOV Field of View. 18

HTML Hypertext Markup Language. 32

IAG International Association of Geodesy. 64

- IAU International Astronomical Union. 63–65
- ICRF International Celestial Reference Frame. 63, 65, 66, 69
- **ICRS** International Celestial Reference System. 63, 65
- **IEEE** Institute of Electrical and Electronics Engineers. 3
- **IERS** International Earth Rotation and Reference Systems Service. 63
- **ISO** International Standards Organization. 3
- **ISO/IEC** International Standards Organization / International Electrotechnical Commission. 3
- **ISO/TS** International Standards Organization / Technical Standard. 3
- JD Julian Date. 65
- JPL Jet Propulsion Laboratory. 68
- LGCWG Lunar Geodesy and Cartography Working Group. 64, 68, 73
- LMST local mean solar time. 87, 88
- LPRP Lunar Precursor Robotics Program. 64
- LRO Lunar Reconnaissance Orbiter. 68
- LSB Least Significant Byte. 37, 39
- LTST local true solar time. 86–88
- MD5 Message-Digest algorithm 5. 34
- ME Mean Earth/Polar Axis. 68
- **MESSENGER** MErcury Surface, Space ENvironment, GEochemistry, and Ranging. 67
- MGCWG Mars Geodesy and Cartography Working Group. 64, 67
- MOLA Mars Orbiter Laser Altimeter. 70

#### Acronyms

- MSB Most Significant Byte. 40, 41
- NASA National Aeronautics and Space Administration. 63–65, 67, 68, 73
- **NIST** National Institute of Standards and Technology. 3
- **PA** Principal Axis. 68
- PCGMWG Planetary Cartography and Geologic Mapping Working Group. 73
- PCWG Planetary Cartography Working Group. 73
- **PDF** Portable Document Format. 32, 67
- **PDS** Planetary Data System. 1–4, 7–9, 11, 21, 23, 29, 32, 63–66, 68–70, 73, 91, 97
- PDS4 Planetary Data System, standards version 4. 7, 21, 23
- **PPI** Planetary Plasma Interactions. 70
- **PSDD** Planetary Science Data Dictionary. 21, 91
- **RA** right ascension. 87
- **SEDR** Supplementary Experiment Data Record. 17
- SI International System of Units / Systeme Internationale d'Unites. 64, 91, 92, 94
- SPICE Spacecraft, Planet, Instrument, C-matrix (pointing), and Events kernels (see the PDS NAIF node for more details). 16–18, 97
- **TDB** Barycentric Dynamical Time. 65
- TT Terrestrial Time. 65
- **URL** Uniform Resource Locator. 3, 4
- UTC Coordinated Universal Time. 34, 65
- **UTF** Unicode Transformation Format. 30

#### 148

**W3C** World Wide Web Consortium. 3

WGCCRE Working Group on Cartographic Coordinates and Rotational Elements. 64, 66–69

XML eXtensible Markup Language. 1, 3, 7, 12, 23, 32

**XSD** XML schema document. 23

YMD Year Month Day. 33, 34

# **Bibliography**

- B. A. Archinal. Summary of Lunar Geodesy and Cartography Working Group Teleconference of Tuesday, 2008 April 16. May 2008.
- B. A. Archinal and the Lunar Geodesy and Cartography Working Group. Lunar Mapping Standards and the NASA LPRP Lunar Geodesy and Cartography Working Group. 37th COSPAR Scientific Assembly, July 13-20, Montreal, Canada, July 2008a.
- B. A. Archinal and the Lunar Geodesy and Cartography Working Group. Lunar Science Support Activities by the NASA LPRP Lunar Geodesy and Cartography Working Group: Recommendations for Lunar Cartographic Standards. NLSI Lunar Science Conference, July 20-23, Moffett Field, CA, July 2008b.
- B. A. Archinal, M. F. A'Hearn, E. Bowell, A. Conrad, G. J. Consolmagno, R. Courtin, T. Fukushima, D. Hestroffer, J. L. Hilton, G. A. Krasinsky, G. Neumann, J. Oberst, P. K. Seidelmann, P. Stooke, D. J. Tholen, P. C. Thomas, and I. P. Williams. Report of the IAU Working Group on Cartographic Coordinates and Rotational Elements: 2009. *Celestial Mechanics and Dynamical Astronomy*, 109(2):101–135, January 2011. doi: 10.1007/s10569-010-9320-4.
- R. M. Batson. Digital Cartography of the Planets: New Methods, its Status and Future. *Photogrammetric Engineering and Remote Sensing*, 53:1211–1218, 1987.
- J. Chapront, M. Chapront-Touzé, and G. Francou. A new determination of lunar orbital parameters, precession constant and tidal acceleration from LLR measurements. *Astronomy and Astrophysics*, 387:700–709, 2002.
- Committee on Data Management and Computation, Space Science Board, Commission on Physical Sciences, Mathematics, and Resources, and National Research Council. *Issues and Recommendations Associated with Distributed Computation and Data Management Systems for the Space Sciences*. National Academy Press, Washington, D.C., 1986.
- M. E. Davies, V. K. Abalakin, C. A. Cross, R. L. Duncombe, H. Masursky, B. Morando, T. C. Owen, P. K. Seidelmann, A. T. Sinclair, G. A. Wilkins, and Y. S. Tjuflin. Report of the IAU Working Group on Cartographic Coordinates and Rotation Elements of the Planets and Satellites. *Celestial Mechanics*, 22:205–230, October 1980. doi: 10.1007/BF01229508.
- M. E. Davies, V. K. Abalakin, J. H. Lieske, P. K. Seidelmann, A. T. Sinclair, A. M. Sinzi, B. A.

Smith, and Y. S. Tjuffin. Report of the IAU Working Group on Cartographic Coordinates and Rotation Elements of the Planets and Satellites: 1982. *Celestial Mechanics*, 29:309–321, April 1983. doi: 10.1007/BF01228525.

- M. E. Davies, V. K. Abalakin, M. Bursa, T. Lederle, J. H. Lieske, R. H. Rapp, P. K. Seidelmann, A. T. Sinclair, V. G. Teifel, and Y. S. Tjuflin. Report of the IAU/IAG/COSPAR Working Group on Cartographic Coordinates and Rotation Elements of the Planets and Satellites: 1985. *Celestial Mechanics*, 39:103–113, May 1986. doi: 10.1007/BF01232291.
- M. E. Davies, V. K. Abalakin, M. Bursa, G. E. Hunt, J. H. Lieske, B. Morando, R. H. Rapp, P. K. Seidelmann, A. T. Sinclair, and Y. S. Tjuflin. Report of the IAU/IAG/COSPAR Working Group on Cartographic Coordinates and Rotation Elements of the Planets and Satellites: 1988. *Celestial Mechanics and Dynamical Astronomy*, 46:187–204, June 1989. doi: 10.1007/BF00053048.
- M. E. Davies, V. K. Abalakin, A. Brahic, M. Bursa, B. H. Chovitz, P. K. Seidelmann, A. T. Sinclair, and Y. S. Tjuflin. Report of the IAU/IAG/COSPAR Working Group on Cartographic Coordinates and Rotation Elements of the Planets and Satellites: 1991. *Celestial Mechanics and Dynamical Astronomy*, 53:377–397, December 1992. doi: 10.1007/BF00051818.
- M. E. Davies, V. K. Abalakin, M. Bursa, J. H. Lieske, B. Morando, D. Morrison, P. K. Seidelmann, A. T. Sinclair, B. Yallop, and Y. S. Tjuflin. Report of the IAU/IAG/COSPAR Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites: 1994. *Celestial Mechanics and Dynamical Astronomy*, 63(2):127–148, June 1996. doi: 10.1007/BF00693410.
- T. C. Duxbury, R. L. Kirk, B. A. Archinal, and G. A. Neumannn. Mars Geodesy/Cartography Working Group Recommendations on Mars Cartographic Constants and Coordinate Systems. In *Commission IV, WG IV/9: Extraterrestrial Mapping Workshop from the Joint International Symposium on Geospatial Theory, Processing and Applications*, July 2002.
- M. Franz and D. Harper. Heliospheric Coordinate Systems. *Planetary and Space Science*, 50(2): 217–233, 2002.
- R. Greeley and R. M. Batson. Planetary Mapping. Cambridge University Press, Cambridge, 1990.
- T. A. Herring, P. M. Mathews, and B. A. Buffett. Modeling of nutation-precession: Very long baseline interferometry results. J. Geophys. Res., 107(B4):2069, 2002. doi: 10.1029/2001JB000165.
- International Astronomical Union. Proceedings of the Twenty-Fourth General Assembly, Manchester 2000. In *Transactions of the IAU*, volume XXIV-B, pages 33–57, 2002.
- J. Kovalevsky and I. I. Mueller. Comments on Conventional Terrestrial and Quasi-Intertial Reference Systems. In E. M. Gaposchkin and B. Kolaczek, editors, *Reference Coordinate Systems* for Earth Dynamics, Proceedings of IAU Colloq. 56, Warsaw, 8-12 September 1980., volume 86 of Astrophysics and Space Science Library, pages 375–384, Dordrecht, Holland, 1981. Reidel Publishing.
- Lunar Geodesy and Cartography Working Group. Recommendations for Formatting Large Lunar Datasets, May 2008.

#### BIBLIOGRAPHY

- Lunar Reconnaissance Orbiter Project. A Standardized Lunar Coordinate System for the Lunar Reconnaissance Orbiter, May 2008.
- C. Ma, E. F. Arias, T. M. Eubanks, A. L. Fey, A. M. Gontier, C. S. Jacobs, O. J. Sovers, B. A. Archinal, and P. Charlot. The International Celestial Reference Frame As Realized by Very Long Baseline Interferometry. *Astronomical Journal*, 116:516–546, July 1998.
- Nautical Almanac Office, U. S. Naval Observatory, and H. M. Nautical Alamanac Office, Royal Greenwich Observatory. The Introduction of the Improved IAU System of Astronomical Constants, Time Scales and Reference Frame Into the Astronomical Almanac. In Supplement to the Astronomical Almanac 1984. U. S. Government Printing Office, Washington and Her Majesty's Stationary Office, London, 1983.
- Navigation and Ancillary Information Facility (NAIF). SPICE Archive Preparation Guide (PDS4 Version). Jet Propulsion Laboratory, Pasadena, CA, TBD.
- Judith J. Newton. *Guide on Data Entity Naming Conventions*. National Bureau of Standards (NBS) Special Publication 500-149, October 1987.
- Planetary Cartography Working Group. Planetary Cartography 1993-2003. NASA, Washington, D.C., 1993.
- Planetary Data System. Archive Preparation Guide (APG), Version 1.4. JPL D-31224. Jet Propulsion Laboratory, Pasadena, CA, April 2010a.
- Planetary Data System. *Data Providers' Handbook Archiving Guide to the PDS4 Data Standards, Version 0.22.3.* Jet Propulsion Laboratory, Pasadena, CA, October 2010b.
- Planetary Data System. Proposer's Archiving Guide (PAG), Version 1.4. JPL D-26359. Jet Propulsion Laboratory, Pasadena, CA, March 2010c.
- Planetary Data System. *PDS4 Data Dictionary Unabridged V.0.3.0.0.e.* Jet Propulsion Laboratory, Pasadena, CA, March 2011a.
- Planetary Data System. *Introduction to the PDS4 Document Set.* Jet Propulsion Laboratory, Pasadena, CA, March 2011b.
- Planetary Data System. *PDS4 Data Standards Concepts*. Jet Propulsion Laboratory, Pasadena, CA, March 2011c.
- Planetary Data System. *PDS Policies and Procedures*. Jet Propulsion Laboratory, Pasadena, CA, TBD.
- C. T. Russell. Geophysical Coordinate Transformations. *Cosmic Electrodynamics*, 2:184–196, 1971.
- P. K. Seidelmann, B. Guinot, and L. E. Dogget. *Time*, chapter 2. Explanatory Supplement to the Astronomical Almanac. U. S. Naval Observatory, University Science Books, Mill Valley, CA, 1992.

- P. K. Seidelmann, V. K. Abalakin, M. Bursa, M. E. Davies, C. De Bergh, J. H. Lieske, J. Oberst, J. L. Simon, E. M. Standish, P. Stooke, and P. C. Thomas. Report of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements of the Planets and Satellites: 2000. *Celestial Mechanics and Dynamical Astronomy*, 82(1):83–110, January 2002. doi: 10.1023/A: 1013939327465.
- P. K. Seidelmann, B. A. Archinal, M. F. A'Hearn, D. P. Cruikshank, J. L. Hilton, H. U. Keller, J. Oberst, J. L. Simon, P. Stooke, D. J. Tholen, and P. C. Thomas. Report of the IAU/IAG Working Group on Cartographic Coordinates and Rotational Elements: 2003. *Celestial Mechanics and Dynamical Astronomy*, 91(3-4):203–215, March 2005. doi: 10.1007/s10569-004-3115-4.
- P. K. Seidelmann, B. A. Archinal, M. F. A'Hearn, A. Conrad, G. J. Consolmagno, D. Hestroffer, J. L. Hilton, G. A. Krasinsky, G. Neumann, J. Oberst, P. Stooke, E. F. Tedesco, D. J. Tholen, P. C. Thomas, and I. P. Williams. Report of the IAU/IAG Working Group on cartographic coordinates and rotational elements: 2006. *Celestial Mechanics and Dynamical Astronomy*, 98(3):155–180, July 2007. doi: 10.1007/s10569-007-9072-y.
- R. Vaughan. *Mars Pathfinder Project Planetary Constants and Models*. JPL D-12947, PF-100-PMC-01. Jet Propulsion Laboratory, December 1995.